



FOX.35

iotaLAMP

www.iotalamp.com

| | | | |
|--------------------------------------|----------------------------------|-----------------------|---------|
| IP66 | IK09 | CREE XP-G | RECYCLE |
| FAILURE RATE < 0,1% after 25,000h | LIFE TIME Tested over 50,000h | MIN -20°C MAX 55°C | CLASE I |
| SP US | | | |

CIRCULAR PROJECTORS
FOX SERIES


References

| Code | Type | Finish | Light Color | Power | Lense | | Voltage | Driver | |
|--------|--------------------|------------------|------------------|--------------------------|--------------------|--------------------|------------------------|------------------------|--------------------|
| VL-F35 | A Base B Base 2 | LG Light grey | White | | | | | | |
| | | DK Dark grey | W24 2400K | 120W | 1,5° (120W) | 2° | UNIV 100-264Vac | STD ON/OFF | |
| | WH White | W27 2700K | 200W | 4,5° | 8° | 010 0-10V | | | |
| | BK Black | W30 3000K | 240W | 12° | 20° | DALI | | | |
| | RAL Any RAL color | W40 4000K | | 30° | 40° | CAS Casambi | | | |
| | | W60 6000K | | 60° | 5x20° | | | | |
| | | | | 10x70° | | | | | |
| | | | | Single Color (SC) | | | | | |
| | | | | R Red | 240W | 4,5° | 8° | UNIV 100-264Vac | STD ON/OFF |
| | | | | B Blue | | 12° | 20° | | 010 0-10V |
| | | | | G Green | | 30° | 40° | | DALI |
| | | | | A Amber | | 60° | 5x20° | | CAS Casambi |
| | | | | 10x70° | | | | | |
| | | | | RGBW | | | | | |
| | | | | RGBW3 | 200W | 8° | 15° | UNIV 100-264Vac | DALI |
| | | | 4 in 1 Chip | 240W | 20° | 30° | DMX | | |
| | | | RGB+W3000K | | 60° | 15x60° | CAS Casambi | | |
| | | | RGBW4 | | | | | | |
| | | | 4 in 1 Chip | | | | | | |
| | | | RGB+W4000K | | | | | | |
| | | | RGBW7 | | | | | | |
| | | | 7 in 1 Chip | | | | | | |
| | | | RGBWCLA | | | | | | |

Reference example

VL-F35-B-BK-B-200W-10x70°-UNIV-010

Variations



A
Base




B
Base 2


Dimensions

iotaLAMP

www.iotalamp.com

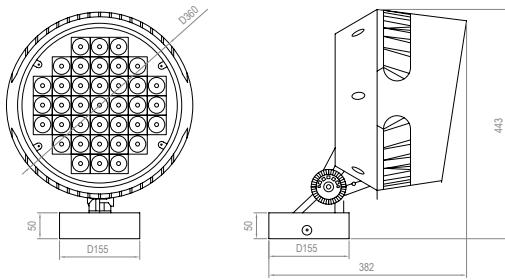

TYPE A

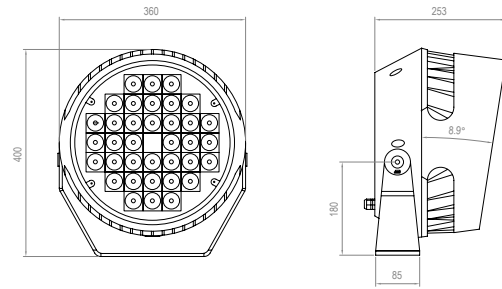


TYPE B

Accessories

| Code | Accessories |
|------|-------------|
|------|-------------|

VL-F35 HC Honeycomb Grid
MSH Mesh

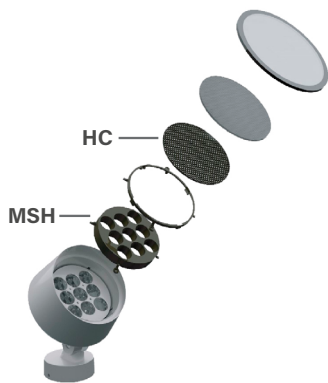

| Code | Accessories |
|------|-------------|
|------|-------------|

VL-F35 *CBLX Special length cable* * Instead of X, put length of cable needed
Example: VL-F35-CBL-10m