

IOTALAMP
L I G H T I N G

CATALOGUE

2025 - 2026

Circular Projectors



FOX.50

FOX.35

FOX.25

FOX.16

FOX.9

FOX.6

FOX.4

SHELL.5

SHELL.3

SHELL.1

SHELL.0

SHELL.MINI

SHELL.NANO

ISVI.18

ISVI.9

ISVI.3

Rectangular Projectors



KUBO.25

KUBO.16

KUBO.9

KUBO.4

KUBO.1

KUBO.0

KUBO.MIN

KUBO.NANO

KAPIK.50

KAPIK.25

KAPIK.16

Liners



LINNEA.100

LINNEA.60

LINNEA.50

LINNEA.40

LINNEA.30

MAXLINE

LINNEA.
CURVE

LINNEA.
TUBE

Underground



UGE

UCE

UGO

UGN

UGS

UNDERLINE.100

UNDERLINE.80

TURTLE

WUS

Effect



LUUBA

GLIDE

GLIDE.XL


WAYS

SHIFT.UD

SHIFT.D

SHIFT.CL

*iota***LAMP**

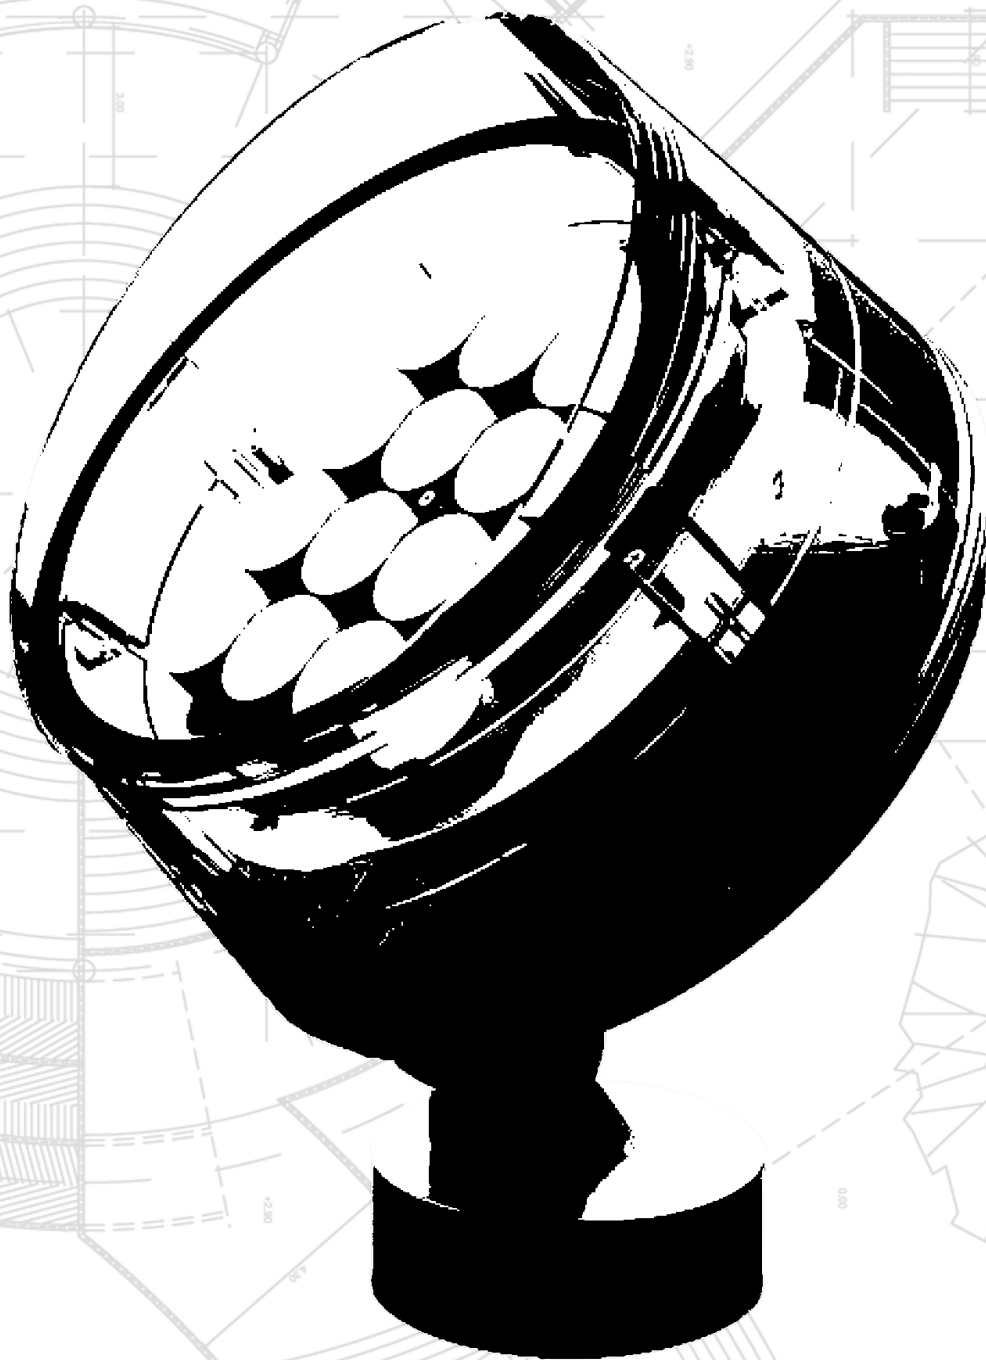

CIRCULAR PROJECTORS

*iota***LAMP**



FOX.50



FOX.35



FOX.25



FOX.16



FOX.9



FOX.6



FOX.4

CIRCULAR PROJECTORS
FOX SERIES



FOX.50

*iota*LAMP



IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



CIRCULAR PROJECTORS
FOX SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ IL-F50	☐ A Base ☐ B Base 2	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 190W ☐ 300W ☐ 360W	☐ 1,5° (190W) ☐ 2° ☐ 4,5° ☐ 8° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 360W	☐ 4,5° ☐ 8° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K ☐ RGBW7 7 in 1 Chip RGBWCLA	☐ 300W ☐ 360W	☐ 8° ☐ 15° ☐ 20° ☐ 30° ☐ 60° ☐ 15x60°	☐ UNIV 100-264Vac	☐ DALI ☐ DMX ☐ CAS Casambi

Reference example

IL-F50-B-BK-RGB7-36W-8°-UNIV-DMX

Variations




A
Base




B
Base 2

Dimensions

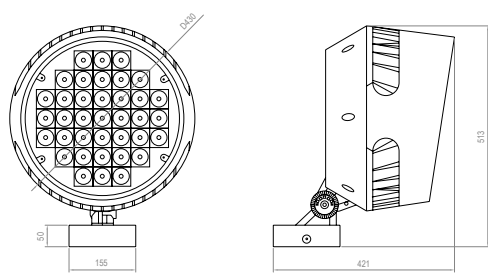


TYPE A

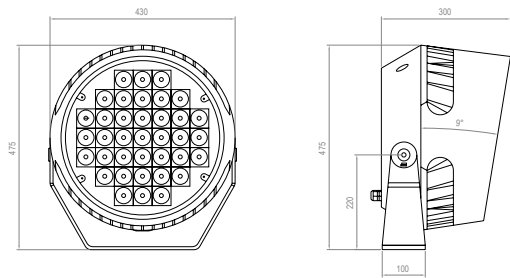

TYPE B

Accessories

Code	Accessories
☐ IL-F50	☐ HC Honeycomb Grid
	☐ MSH Mesh


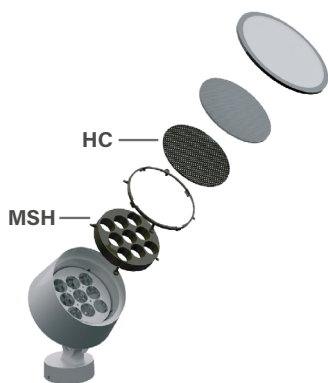


Code	Accessories
☐ IL-F50	☐ *CBLX Special length cable*

** Instead of X, put length of cable needed
Example: VL-F50-CBL-10m*

FOX.35

*iota*LAMP



CIRCULAR PROJECTORS
FOX SERIES


References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ IL-F35	☐ A Base ☐ B Base 2	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 120W ☐ 200W ☐ 240W	☐ 1,5° (120W) ☐ 4,5° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ 2° ☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ UNIV 100-264Vac ☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 240W	☐ 4,5° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ UNIV 100-264Vac ☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 200W ☐ 240W				☐ 8° ☐ 20° ☐ 60°	☐ 15° ☐ 30° ☐ 15x60°	☐ UNIV 100-264Vac ☐ DALI ☐ DMX ☐ CAS Casambi
☐ RGBW4 4 in 1 Chip RGB+W4000K							
☐ RGBW7 7 in 1 Chip RGBWCLA							

Reference example

IL-F35-B-BK-B-200W-10x70°-UNIV-010

Variations




A
Base




B
Base 2

Dimensions

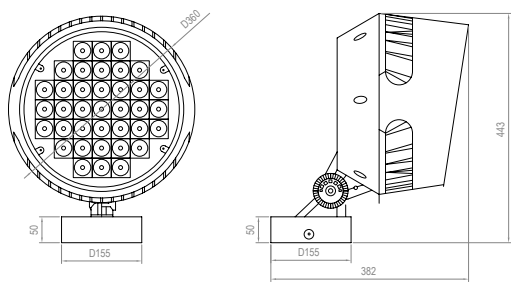

TYPE A

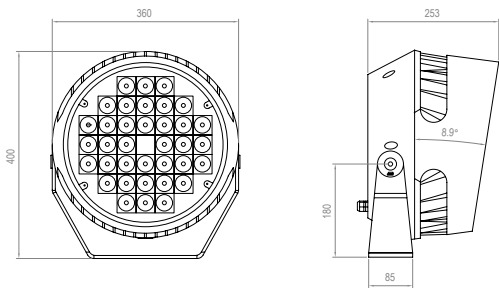


TYPE B

Accessories

Code	Accessories
------	-------------

- ☐ IL-F35
- ☐ HC Honeycomb Grid
- ☐ MSH Mesh

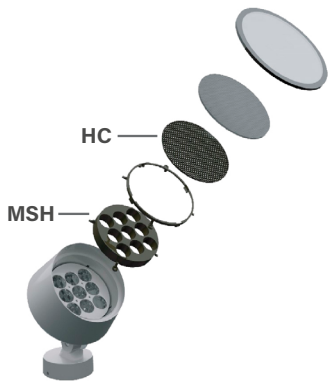


Code	Accessories
------	-------------

- ☐ IL-F35
- ☐ *CBLX Special length cable* ** Instead of X, put length of cable needed
Example: VL-F35-CBL-10m*

FOX.25

*iota*LAMP



CIRCULAR PROJECTORS
FOX SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ IL-F25	☐ A Base ☐ B Base 2 ☐ C Pole Arm	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 70W ☐ 85W ☐ 120W	☐ 1,5° (70W) ☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 85W ☐ 120W	☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K ☐ RGBW7 7 in 1 Chip RGBWCLA	☐ 150W	☐ 15° ☐ 30° ☐ 15x60° ☐ 20° ☐ 60°	☐ UNIV 100-264Vac ☐ 36 36Vdc	☐ DALI ☐ DMX ☐ CAS Casambi

Reference example

IL-F25-C-DK-W60-120W-60°-UNIV-STD

Variations



A
Base




B
Base 2




C
Pole Arm
D=45mm


Dimensions

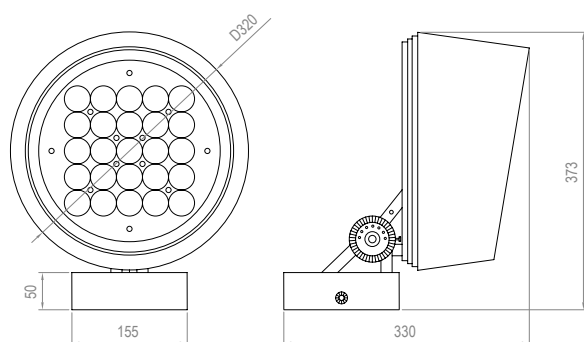

TYPE A

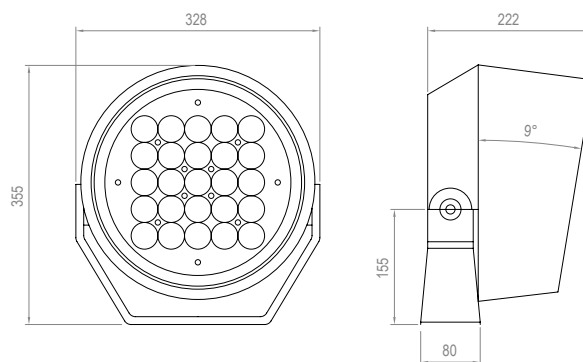

TYPE B

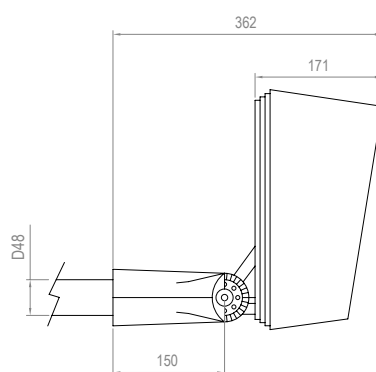


TYPE C

Accessories

Code	Accessories
------	-------------

- | | |
|--|---|
| ☐ IL-F25 | ☐ HC Honeycomb Grid |
| | ☐ MSH Mesh |

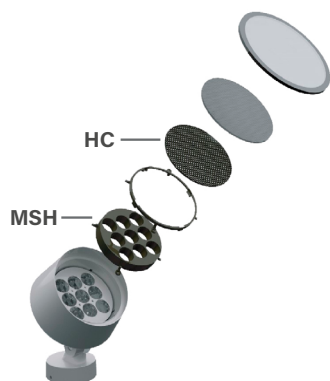


Code	Accessories
------	-------------

- | | |
|--|--|
| ☐ IL-F25 | ☐ *1BR Bracket for 1 projector |
| | ☐ *2BR Bracket for 2 projector |
| | ☐ *CBLX Special length cable |


** Must be used with Type C*
** Must be used with Type C*
** Instead of X, put length of cable needed*
Example: VL-F25-CBL-10m



1BR




2BR



FOX.16

*iota*LAMP



CIRCULAR PROJECTORS
FOX SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ IL-F16	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 40W ☐ 60W ☐ 75W	☐ 1,5° (40W) ☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 60W ☐ 75W	☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K ☐ RGBW7 7 in 1 Chip RGBWCLA	☐ 100W	☐ 15° ☐ 30° ☐ 15x60°	☐ 20° ☐ 60° ☐ UNIV 100-264Vac ☐ 36 36Vdc	☐ DALI ☐ DMX ☐ CAS Casambi

Reference example

IL-F16-C-DK-W60-75W-20°-UNIV-STD

Variations



A
Base



B
Base 2



C
Pole Arm
D=45mm




D
Pole mounted
D67-325mm




E
Stripe mounted


Dimensions

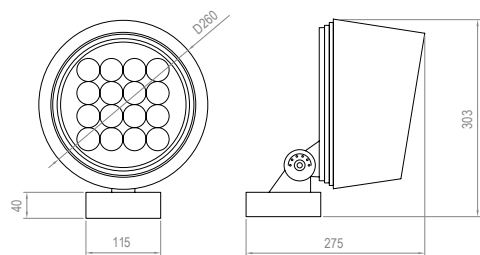


TYPE A

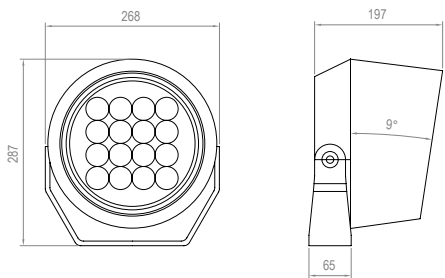


TYPE B



TYPE C



TYPE D

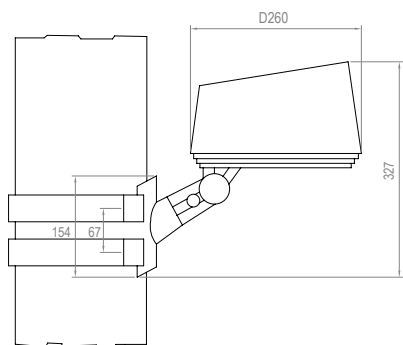


TYPE E

Accessories

Code	Accessories
------	-------------

- ☐ IL-F16
- ☐ HC Honeycomb Grid
- ☐ MSH Mesh

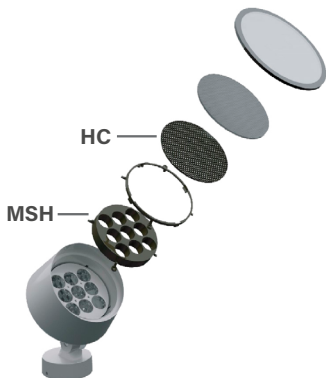


Code	Accessories
------	-------------

- ☐ IL-F16
- ☐ *1BR Bracket for 1 projector
- ☐ *2BR Bracket for 2 projector
- ☐ *CBLX Special length cable


* Must be used with Type C
* Must be used with Type C
* Instead of X, put length of cable needed
Example: VL-F16-CBL-10m



1BR




2BR



FOX.9

iotaLAMP



CIRCULAR PROJECTORS FOX SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ IL-F9	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 30W ☐ 35W ☐ 45W	☐ 1,5° (30W) ☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 35W ☐ 45W	☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
	☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K ☐ RGBW7 7 in 1 Chip RGBWCLA			☐ 60W	☐ 15° ☐ 30° ☐ 15x60°	☐ 20° ☐ 60° ☐ UNIV 100-264Vac ☐ 36 36Vdc	☐ DALI ☐ DMX ☐ CAS Casambi

Reference example

IL-F9-A-DK-W30-45W-2,5°-UNIV-DALI

Variations



A
Base



B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions

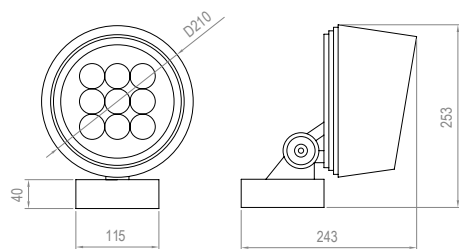


TYPE A

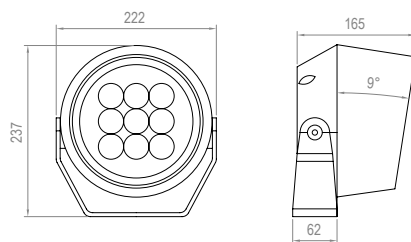


TYPE B




TYPE C



TYPE D

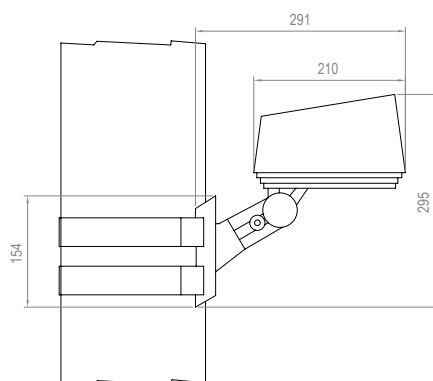

TYPE E




TYPE F

Accessories

Code	Accessories
------	-------------

- | | |
|--------------------------------|--|
| ☐ IL-F9 | ☐ HC Honeycomb Grid |
| | ☐ MSH Mesh |


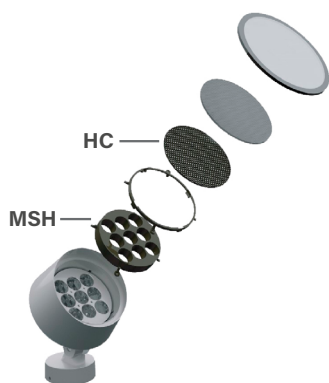


Code	Accessories
------	-------------



- | | | |
|--------------------------------|---|---|
| ☐ IL-F9 | ☐ *SPK SPIKE | <i>* Must be used with Type F</i> |
| | ☐ *1BR Bracket for 1 projector | <i>* Must be used with Type C</i> |
| | ☐ *2BR Bracket for 2 projector | <i>* Must be used with Type C</i> |
| | ☐ *BX Elevated Box | <i>* Must be used with Type F</i> |
| | ☐ *CBLX Special length cable | <i>* Instead of X, put length of cable needed</i> |
| | | <i>Example: VL-F9-CBL-10m</i> |




SPK



BX

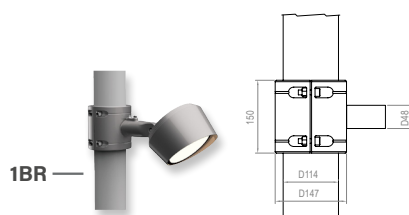


1BR

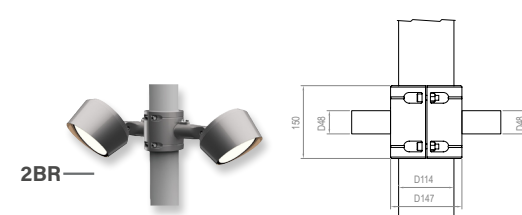

2BR

FOX.6

*iota*LAMP



CIRCULAR PROJECTORS FOX SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ IL-F6	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 22W ☐ 30W	☐ 1,5° (22W) ☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 22W ☐ 30W	☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 30W ☐ 36W	☐ 8° ☐ 15° ☐ 20° ☐ 30° ☐ 60° ☐ 15x60°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ DALI ☐ DMX ☐ CAS Casambi
			☐ RGBW4 4 in 1 Chip RGB+W4000K				

Reference example

VL-F6-A-DK-RGBW3-36W-15°-24-DMX

Variations



A
Base



B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions

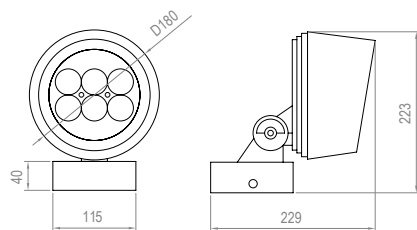


TYPE A

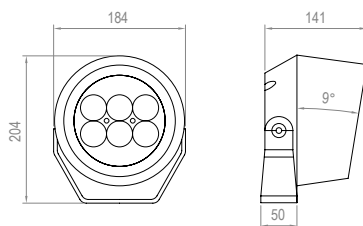


TYPE B




TYPE C



TYPE D

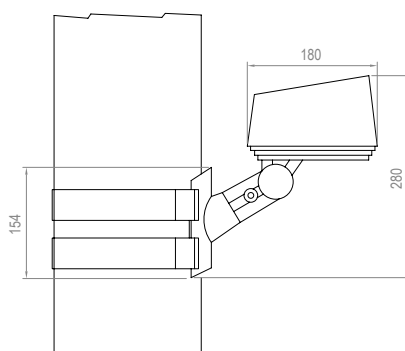


TYPE E



TYPE F

Accessories

Code	Accessories
☐ VL-F6	☐ HC Honeycomb Grid
	☐ MSH Mesh


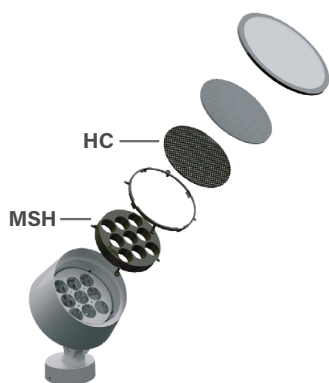


Code	Accessories
☐ VL-F6	☐ *SPK SPIKE
	☐ *1BR Bracket for 1 projector
	☐ *2BR Bracket for 2 projector
	☐ *BX Elevated Box
	☐ *CBLX Special length cable



** Must be used with Type F*
** Must be used with Type C*
** Must be used with Type F*
** Instead of X, put length of cable needed*
Example: VL-F6-CBL-10m




SPK



BX

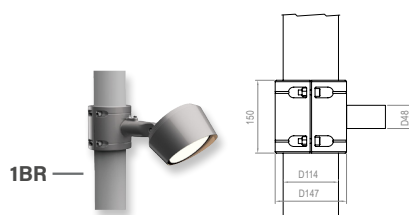


1BR

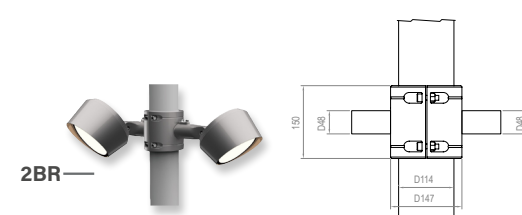

2BR

FOX.4

*iota*LAMP



CIRCULAR PROJECTORS FOX SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-F4	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 10W ☐ 15W ☐ 20W	☐ 1,5° (10W) ☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 5x20° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 15W ☐ 20W	☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 5x20° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 20W	☐ 15° ☐ 30° ☐ 15x60°	☐ 24 24Vdc	☐ DALI ☐ DMX ☐ CAS Casambi
			☐ RGBW4 4 in 1 Chip RGB+W4000K				

Reference example

VL-F4-A-WH-W24-10W-1,5°-UNIV-STD

Variations



A
Base



B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions

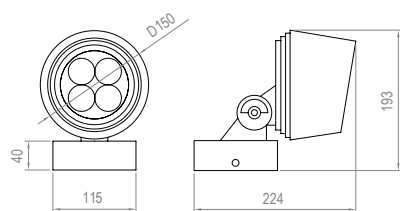


TYPE A




TYPE B




TYPE C



TYPE D

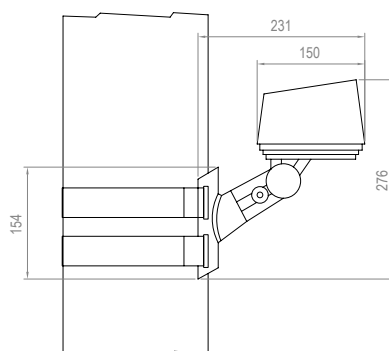

TYPE E




TYPE F

Accessories

Code	Accessories
------	-------------

- | | |
|---------------------------------------|---|
| ☐ VL-F4 | ☐ HC Honeycomb Grid |
| | ☐ MSH Mesh |

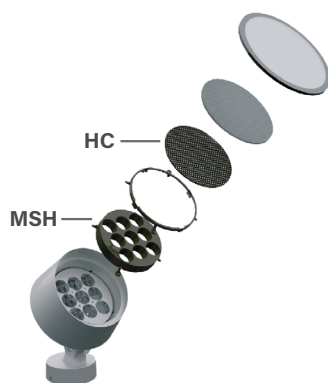


Code	Accessories
------	-------------


- | | | |
|---------------------------------------|--|---|
| ☐ VL-F4 | ☐ *SPK SPIKE | <i>* Must be used with Type F</i> |
| | ☐ *1BR Bracket for 1 projector | <i>* Must be used with Type C</i> |
| | ☐ *2BR Bracket for 2 projector | <i>* Must be used with Type C</i> |
| | ☐ *BX Elevated Box | <i>* Must be used with Type F</i> |
| | ☐ *CBLX Special length cable | <i>* Instead of X, put length of cable needed</i> |
| | | <i>Example: VL-F4-CBL-10m</i> |




SPK




BX



1BR



2BR

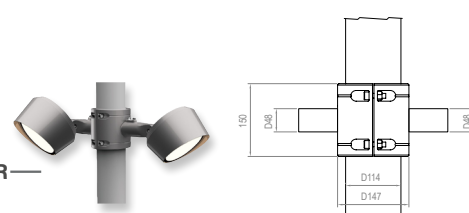

*iota***LAMP**



SHELL.5



SHELL.3



SHELL.1



SHELL.0



SHELL.MINI




SHELL.NANO

CIRCULAR PROJECTORS
SHELL SERIES



SHELL.5

*iota***LAMP**



CIRCULAR PROJECTORS SHELL SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver	
☐ VL-SH5	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 45W ☐ 50W	☐ 2,5° (45W) ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ 6° ☐ 20° ☐ 40° ☐ 5x20°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)								
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 45W ☐ 50W	☐ 6° ☐ 20° ☐ 40° ☐ 5x20°	☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW								
			☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 50W	☐ 15° ☐ 30° ☐ 15x60°	☐ 20° ☐ 60°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ DALI ☐ DMX ☐ CAS Casambi
			☐ RGBW4 4 in 1 Chip RGB+W4000K					

Reference example

VL-SH5-A-DK-W30-45W-2,5°-UNIV-DALI

Variations



A
Base



B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions




TYPE A




TYPE B

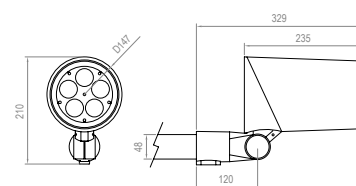


TYPE C



TYPE D



TYPE E




TYPE F

Accessories

Code	Accessories
------	-------------

☐ **VL-SH5**

- ☐ **HC** Honeycomb Grid
- ☐ **MSH** Mesh
- ☐ **HO** Hood
- ☐ **VS** Visor






Code	Accessories
------	-------------

☐ **VL-SH5**



- ☐ ***SPK** SPIKE
- ☐ ***1BR** Bracket for 1 projector
- ☐ ***2BR** Bracket for 2 projector
- ☐ ***BX** Elevated Box
- ☐ ***CBLX** Special length cable

** Must be used with Type F*
** Must be used with Type C*
** Must be used with Type C*
** Must be used with Type F*
** Instead of X, put length of cable needed*
Example: VL-SH5-CBL-10m

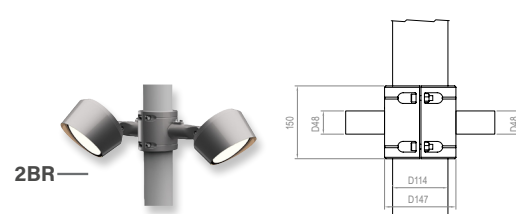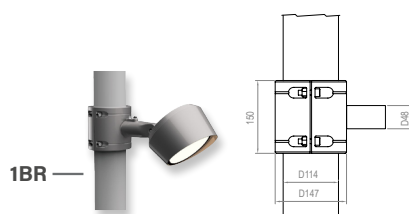

SHELL.3

*iota***LAMP**



CIRCULAR PROJECTORS SHELL SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-SH3	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 10W ☐ 12W ☐ 15W ☐ 30W	☐ 1,5° (10W) ☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 12W ☐ 15W ☐ 30W	☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
☐ RGBW3			4 in 1 Chip RGB+W3000K	☐ 12W	☐ 15° ☐ 30° ☐ 15x60°	☐ 24 24Vdc	☐ DALI ☐ DMX ☐ CAS Casambi
☐ RGBW4			4 in 1 Chip RGB+W4000K				

Reference example

VL-SH3-A-WH-W24-10W-1,5°-UNIV-STD

Variations



A
Base



B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions




TYPE A




TYPE B

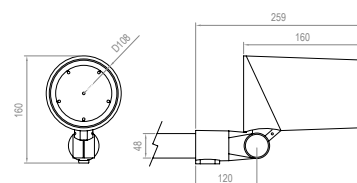


TYPE C



TYPE D



TYPE E



TYPE F



Accessories

Code	Accessories
☐ VL-SH3	☐ HC Honeycomb Grid
	☐ MSH Mesh
	☐ HO Hood
	☐ VS Visor




Code	Accessories
☐ VL-SH3	☐ *SPK SPIKE
	☐ *1BR Bracket for 1 projector
	☐ *2BR Bracket for 2 projector
	☐ *BX Elevated Box
	☐ *CBLX Special length cable

** Must be used with Type F*
** Must be used with Type C*
** Must be used with Type C*
** Must be used with Type F*
** Instead of X, put length of cable needed*
Example: VL-SH3-CBL-10m

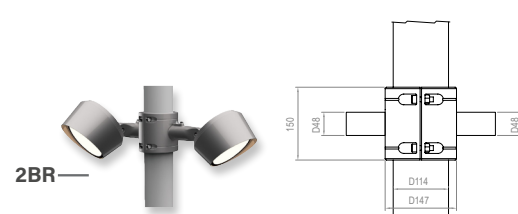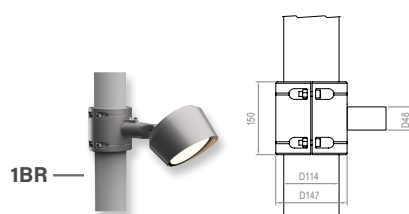



Accessories

Code	Description	Diameter	N° of projectors
☐ VL-SH3	☐ RNG RING	☐ 50 50cm ☐ 60 60cm ☐ 70 70cm ☐ 80 80cm	☐ 2P 2 projectors ☐ 3P 3 projectors ☐ 4P 4 projectors ☐ 6P 6 projectors ☐ 8P 8 projectors
		<i>Suggested diameter = diameter of tree trunk + 10cm/15cm</i>	<i>* projectors references must be order separately</i> <i>** For 24Vdc projectors, ring can allocate 1 power supply for all projectors</i>

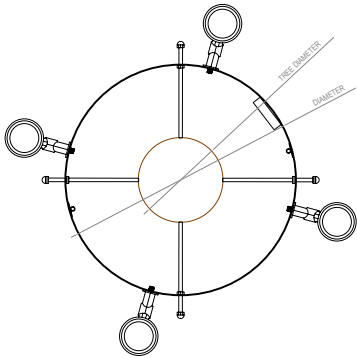

SHELL.1

*iota*LAMP



CIRCULAR PROJECTORS SHELL SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver	
☐ VL-SH1	☐ A Base ☐ B Base 2 ☐ D Pole mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White					
			☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 10W	☐ 2,5° ☐ 15° ☐ 30° ☐ 60° ☐ 10x70°	☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi
White -COB Led module								
			☐ W30 300K ☐ W40 400K	☐ 16W	☐ 15° ☐ 36°	☐ 24° ☐ 50°	☐ UNIV 100-264Vac	☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi
Single Color (SC)								
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 10W	☐ 3° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi
RGBW								
			☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K	☐ 8W	☐ 15° ☐ 30° ☐ 15x60°	☐ 20° ☐ 60°	☐ 24 24Vdc	☐ RD Remote DALI ☐ DMX ☐ RCAS Remote Casambi

Reference example

VL-SH1-A-WH-W24-10W-60°-UNIV-STD

Variations



A
Base



B
Base 2




D
Pole mounted
D67-325mm




F
Nut (M10x1,5mm)


Dimensions

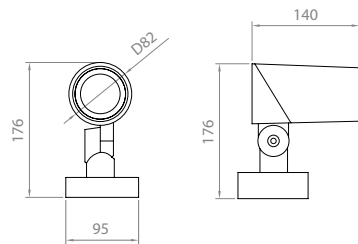


TYPE A

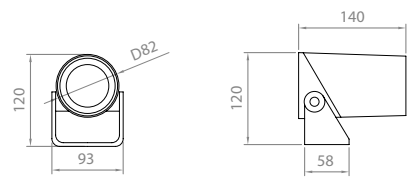

TYPE B

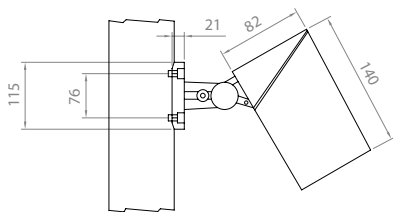

TYPE D

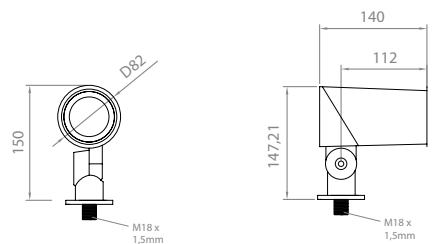


TYPE F

Accessories

Code	Accessories
------	-------------


- ☐ VL-SH1
- ☐ HC Honeycomb Grid
- ☐ HO Hood
- ☐ VS Visor

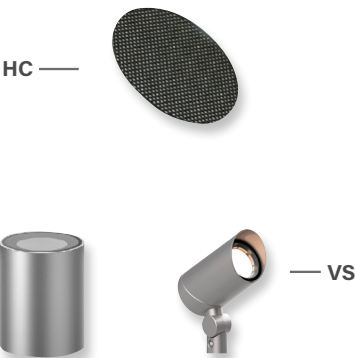

Code	Accessories
------	-------------

- ☐ VL-SH1
- ☐ *SPK SPIKE
- ☐ *1BR Bracket for 1 projector
- ☐ *CBLX Special length cable

* Must be used with Type F
* Must be used with Type C
* Instead of X, put length of cable needed
Example: VL-SH1-CBL-10m

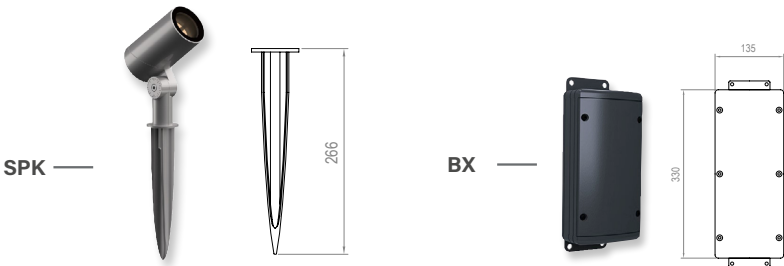


Accessories

Code	Description	Diameter	N° of projectors
☐ VL-SH1	☐ RNG RING	☐ 50 50cm ☐ 60 60cm ☐ 70 70cm ☐ 80 80cm	☐ 2P 2 projectors ☐ 3P 3 projectors ☐ 4P 4 projectors ☐ 6P 6 projectors ☐ 8P 8 projectors
		<i>Suggested diameter = diameter of tree trunk + 10cm/15cm</i>	<i>* projectors references must be order separetly</i> <i>** For 24Vdc projectors, ring can allocate 1 power supply for all projectors</i>





RNG

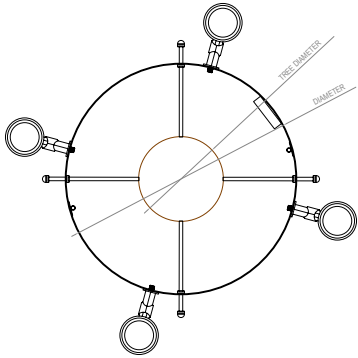

SHELL.0

*iota*LAMP



CIRCULAR PROJECTORS SHELL SERIES


References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-SH0	☐ A Base ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 10W	☐ 2,5° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 12 12Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 10W	☐ 6° ☐ 20° ☐ 40° ☐ 5x20°	☐ UNIV 100-264Vac ☐ 12 12Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Casambi
RGBW							
☐ RGBW3 4 in 1 Chip RGB+W3000K				☐ 10W	☐ 15° ☐ 30° ☐ 10x30°	☐ 20° ☐ 60° ☐ 10x60°	☐ 12 12Vdc ☐ RD Remote DALI ☐ DMX ☐ RCAS Casambi
☐ RGBW4 4 in 1 Chip RGB+W4000K							

Reference example

VL-SH0-A-WH-W24-10W-60°-UNIV-CAS

Variations




A
Base




F
Nut (M10x1,5mm)

Dimensions

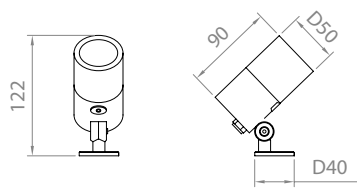

TYPE A

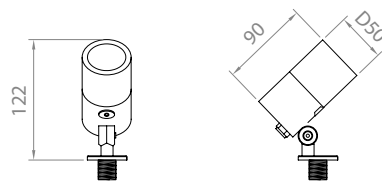

TYPE F

Accessories

Code	Accessories
------	-------------

- ☐ VL-SH0
- ☐ HC Honeycomb Grid
- ☐ HO Hood 75 mm








Code	Accessories
------	-------------

- ☐ VL-SH0
- ☐ *SPK SPIKE
- ☐ *BX Elevated Box
- ☐ *POLE POLE
- ☐ *CLP CLAMP
- ☐ *STR STRIPE
- ☐ *CBLX Special length cable


** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*

** Instead of X, put length of cable needed*
Example: VL-SH0-CBL-10m

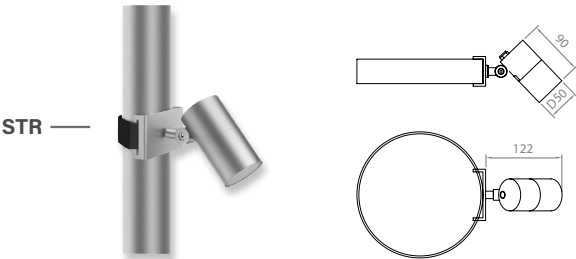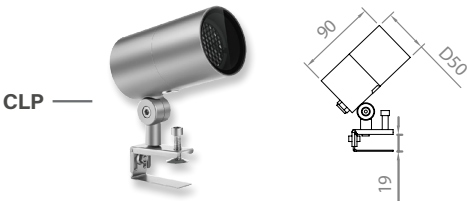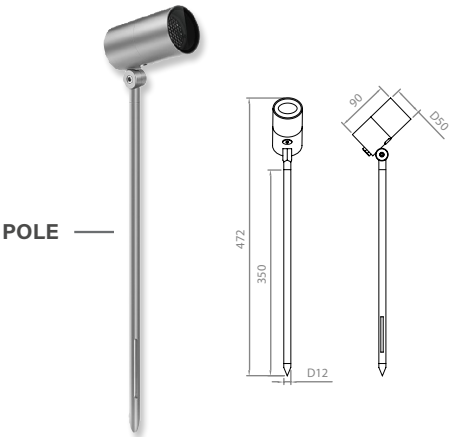



Accessories

Code	Description	Diameter	N° of projectors
☐ VL-SH0	☐ RNG RING	☐ 50 50cm ☐ 60 60cm ☐ 70 70cm ☐ 80 80cm <i>Suggested diamater = diamater of tree trunk + 10cm/ 15cm</i>	☐ 2P 2 projectors ☐ 3P 3 projectors ☐ 4P 4 projectors ☐ 6P 6 projectors ☐ 8P 8 projectors <i>* projectors references must be order separetly</i> <i>** For 24Vdc projectors, ring can allocate 1 power supply for all projectors</i>

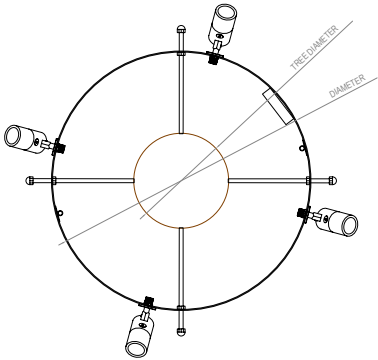

SHELL.MINI

*iota***LAMP**



CIRCULAR PROJECTORS SHELL SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-SH.MIN	☐ A Base ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 6W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 12 12Vdc ☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Casambi
Single Color (SC)							
		☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 6W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ 10x70°	☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 12 12Vdc ☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Casambi	
RGBW							
☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 6W		☐ 20° ☐ 60° ☐ 15x25°	☐ 40° ☐ 15x60°	☐ 12 12Vdc ☐ RD Remote DALI ☐ DMX ☐ RCAS Casambi		
☐ RGBW4 4 in 1 Chip RGB+W4000K							

Reference example

VL-SH.MIN-A-WH-W24-6W-60°-UNIV-STD

Variations




A
Base




F
Nut (M10x1,5mm)

Dimensions

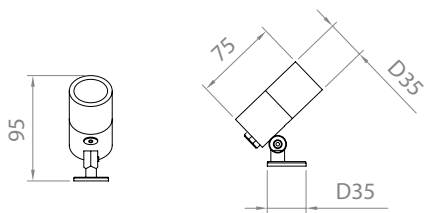

TYPE A



TYPE F

Accessories

Code	Accessories
------	-------------

- ☐ VL-SH.MIN
- ☐ HC Honeycomb Grid
- ☐ HO Hood 57 mm




Code	Accessories
------	-------------

- ☐ VL-SH.MIN
- ☐ *SPK SPIKE
- ☐ *BX Elevated Box
- ☐ *POLE POLE
- ☐ *CLP CLAMP
- ☐ *STR STRIPE
- ☐ *CBLX Special length cable


** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*

** Instead of X, put length of cable needed*
Example: VL-SH.MIN-CBL-10m

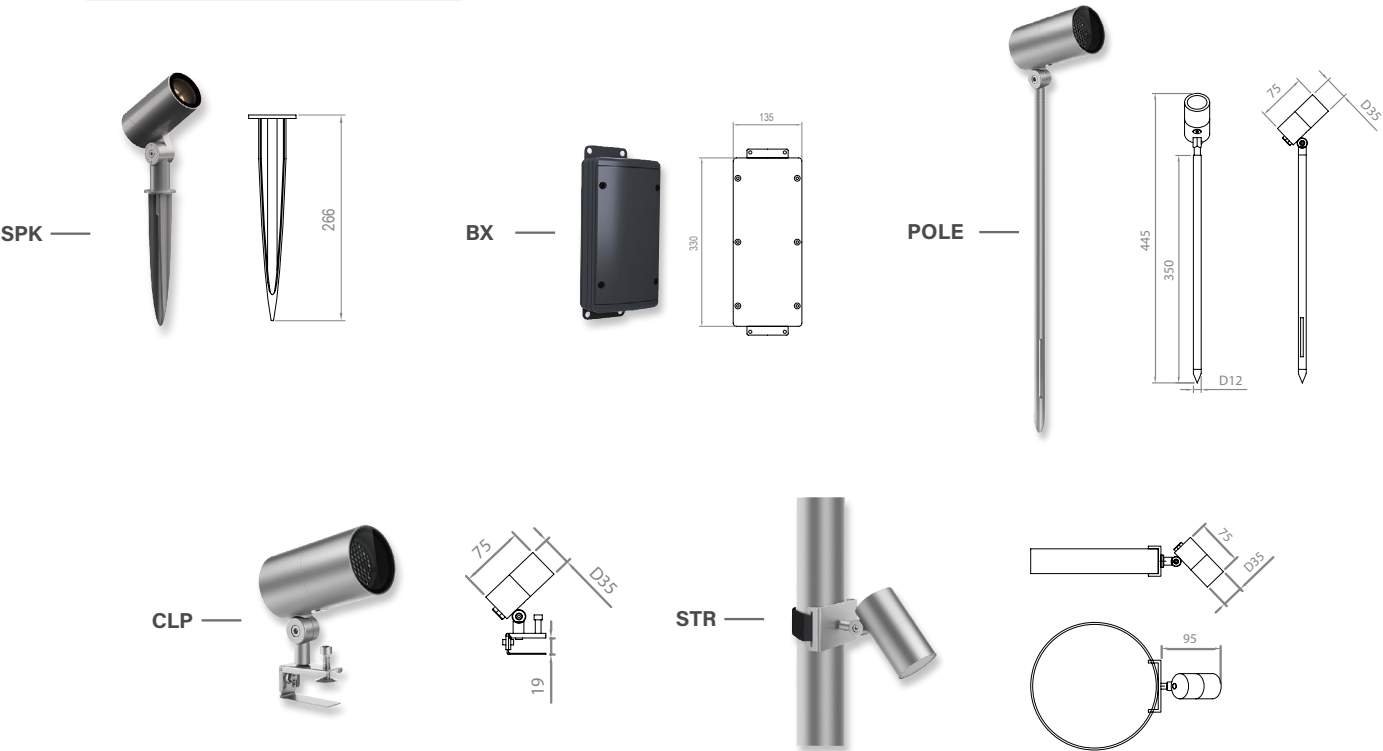



Accessories

Code	Description	Diameter	N° of projectors
☐ VL-SH.MIN	☐ RNG RING	☐ 50 50cm	☐ 2P 2 projectors
		☐ 60 60cm	☐ 3P 3 projectors
		☐ 70 70cm	☐ 4P 4 projectors
		☐ 80 80cm	☐ 6P 6 projectors
		<i>Suggested diameter = diameter of tree trunk + 10cm/15cm</i>	☐ 8P 8 projectors
			<i>* projectors references must be order separetly</i>
			<i>** For 24Vdc projectors, ring can allocate 1 power supply for all projectors</i>

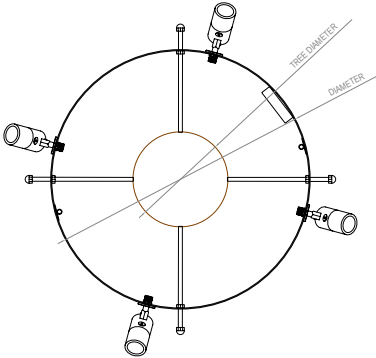

SHELL.NANO

*iota***LAMP**



CIRCULAR PROJECTORS SHELL SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-SH.NANO	☐ A Base ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 3W	☐ 20° ☐ 40° ☐ 25x45° ☐ 30° ☐ 60°	☐ 12 12Vdc ☐ 24 12Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 3W	☐ 20° ☐ 40° ☐ 25x45° ☐ 30° ☐ 60°	☐ 12 12Vdc ☐ 24 12Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Casambi

Reference example

VL-SH.NANO-A-WH-W24-3W-60°-24-STD

Variations




A
Base




F
Nut (M10x1,5mm)

Dimensions

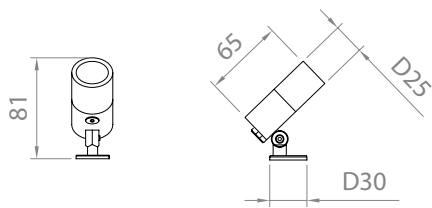

TYPE A



TYPE F

Accessories

Code	Accessories
------	-------------

- ☐ VL-SH.NANO
- ☐ HC Honeycomb Grid
- ☐ HO Hood 48 mm




Code	Accessories
------	-------------

- ☐ VL-SH.NANO
- ☐ *SPK SPIKE
- ☐ *BX Elevated Box
- ☐ *POLE POLE
- ☐ *CLP CLAMP
- ☐ *STR STRIPE
- ☐ *CBLX Special length cable



** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*
** Must be used with Type F*

** Instead of X, put length of cable needed*
Example: VL-SH.NANO-CBL-10m

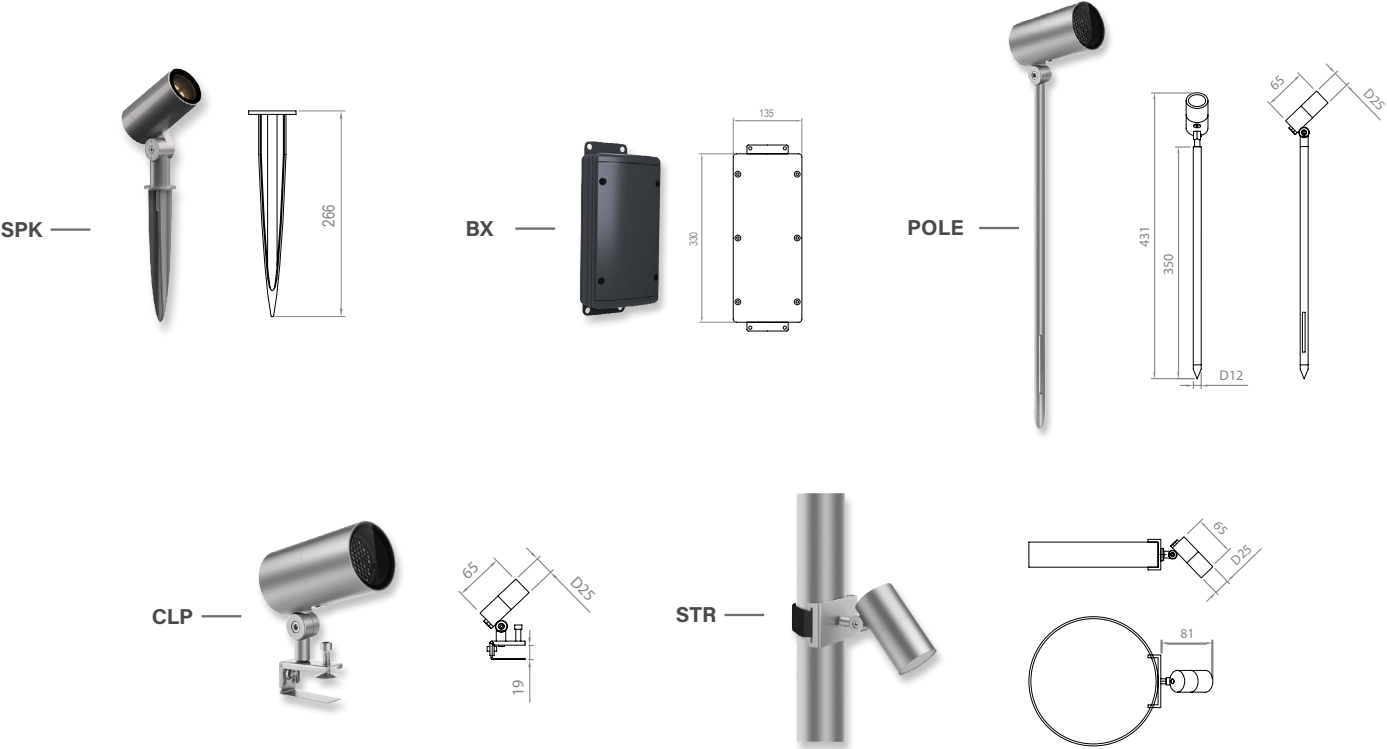

Accessories

Code	Description	Diameter	Nº of projectors
☐ VL-SH.NANO	☐ RNG RING	☐ 50 50cm	☐ 2P 2 projectors
		☐ 60 60cm	☐ 3P 3 projectors
		☐ 70 70cm	☐ 4P 4 projectors
		☐ 80 80cm	☐ 6P 6 projectors
		<i>Suggested diameter = diameter of tree trunk + 10cm/15cm</i>	☐ 8P 8 projectors
			<i>* projectors references must be order separetly</i>
			<i>** For 24Vdc projectors, ring can allocate 1 power supply for all projectors</i>

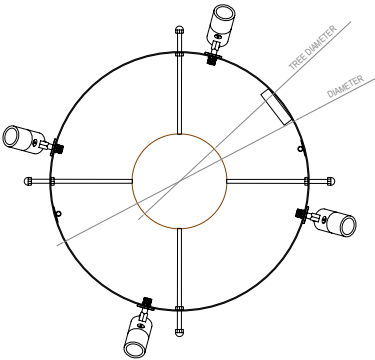


*iota***LAMP**



ISVI.18



ISVI.9

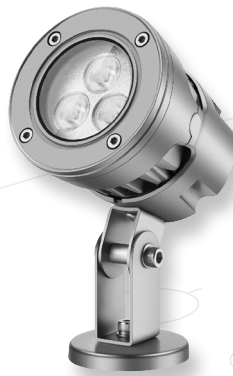


ISVI.3

CIRCULAR PROJECTORS
ISVI SERIES



ISVI.18

*iota***LAMP**



CIRCULAR PROJECTORS
ISVI SERIES


References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver	
☐ VL-IV18	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 21W ☐ 30W ☐ 45W	☐ 8° ☐ 20° ☐ 45° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF
			Single Color (SC)					
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 21W ☐ 30W ☐ 45W	☐ 8° ☐ 20° ☐ 45° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF

Reference example

VL-IV18-A-LG-W60-45W-8-UNIV-STD

Variations



A
Base



B
Base 2




C
Pole Arm
D=45mm




F
Nut (M10x1,5mm)


Dimensions




TYPE A



TYPE B

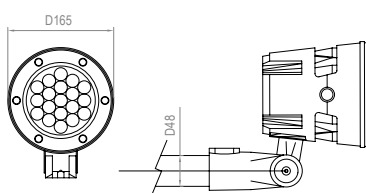

TYPE C



TYPE F


Accessories

Code	Accessories
------	-------------


☐ VL-IV18

- ☐ **HO** Hood
☐ **VS** Visor

HO

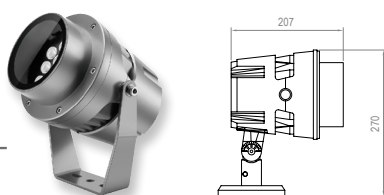

VS

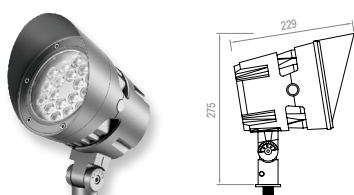


Code	Accessories
------	-------------

☐ VL-IV18


- ☐ ***SPK** SPIKE
☐ ***1BR** Bracket for 1 projector
☐ ***2BR** Bracket for 2 projector
☐ ***BX** Elevated Box
☐ ***CBLX** Special length cable

** Must be used with Type F*
** Must be used with Type C*
** Must be used with Type C*
** Must be used with Type F*
** Instead of X, put length of cable needed*
Example: VL-IV18-CBL-10m


SPK




BX



1BR




2BR

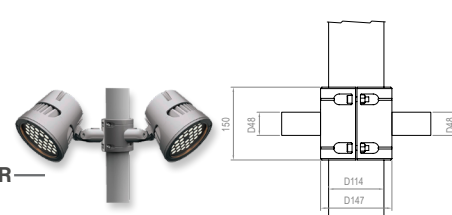



ISVI.9

*iota***LAMP**



CIRCULAR PROJECTORS
ISVI SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver	
☐ VL-IV9	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 11W ☐ 20W	☐ 8° ☐ 20° ☐ 45° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 12 12Vdc	☐ STD ON/OFF
			Single Color (SC)					
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 11W ☐ 20W	☐ 8° ☐ 20° ☐ 45° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 12 12Vdc	☐ STD ON/OFF

Reference example

VL-IV9-C-WH-G-20W-10x60-12-STD

Variations



A
Base



B
Base 2




C
Pole Arm
D=45mm




F
Nut (M10x1,5mm)


Dimensions

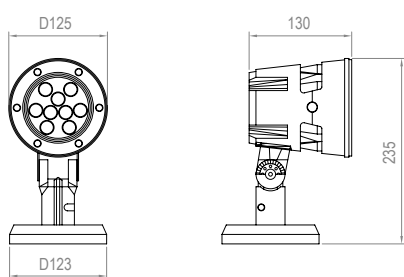


TYPE A

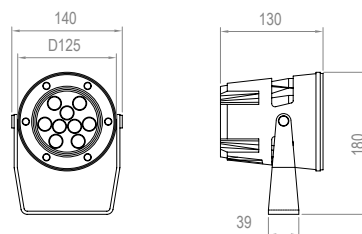

TYPE B



TYPE C



TYPE F


Accessories

Code	Accessories
------	-------------


- ☐ **VL-IV9**
- ☐ **HO** Hood
- ☐ **VS** Visor

Code	Accessories
------	-------------


- ☐ **VL-IV9**
- ☐ ***SPK** SPIKE
- ☐ ***1BR** Bracket for 1 projector
- ☐ ***2BR** Bracket for 2 projector
- ☐ ***BX** Elevated Box
- ☐ ***CBLX** Special length cable
- * Must be used with Type F*
- * Must be used with Type C*
- * Must be used with Type F*
- * Instead of X, put length of cable needed*
- Example: VL-IV9-CBL-10m*

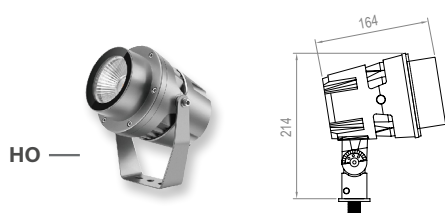

HO




SPK

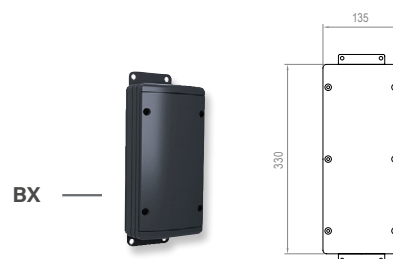


BX



VS

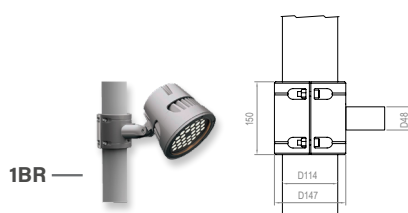



1BR

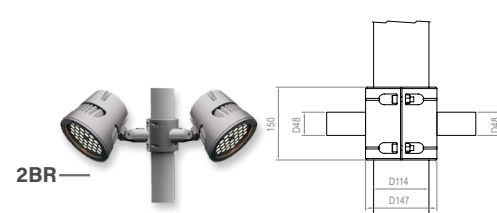

2BR

ISVI.3

*iota*LAMP



CIRCULAR PROJECTORS
ISVI SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver	
☐ VL-IV3	☐ A Base ☐ B Base 2 ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White					
			☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 3,5W ☐ 6W ☐ 8W	☐ 8° ☐ 20° ☐ 45° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 12 12Vdc	☐ STD ON/OFF
			Single Color (SC)					
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 3,5W ☐ 6W ☐ 8W	☐ 8° ☐ 20° ☐ 45° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 12 12Vdc	☐ STD ON/OFF

Reference example

VL-IV3-F-BK-A-6W-15x30-12-STD

Variations



A
Base




B
Base 2



F
Nut (M10x1,5mm)


Dimensions

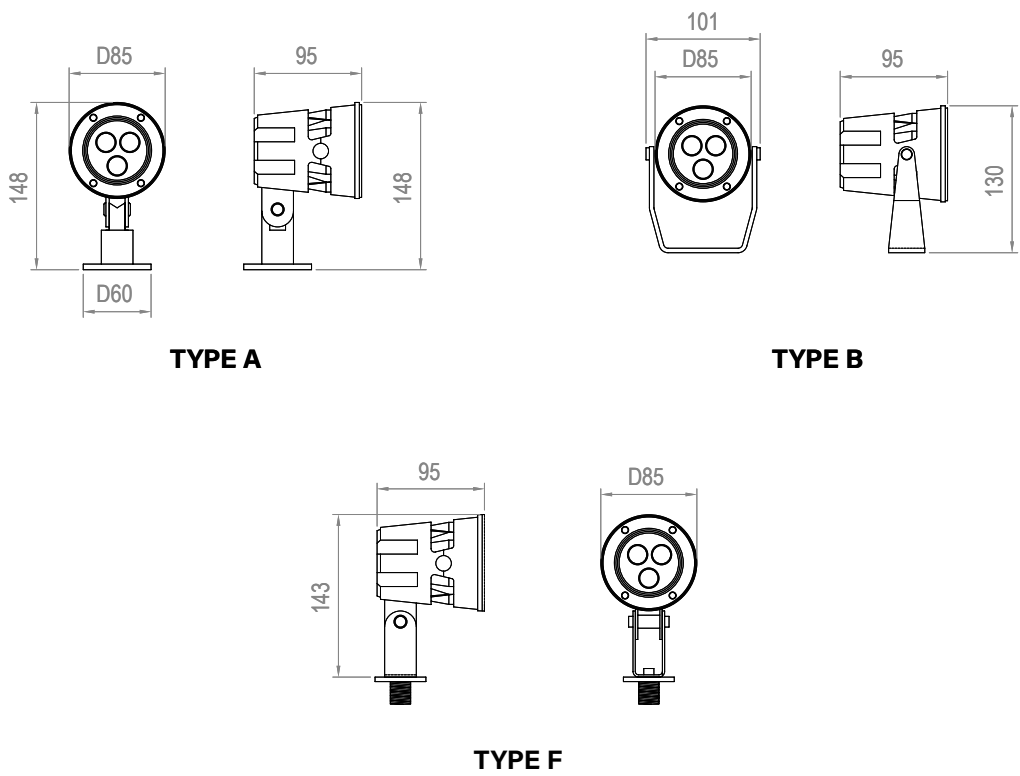

Accessories

Code	Accessories
------	-------------



- ☐ VL-IV3
- ☐ VS Visor

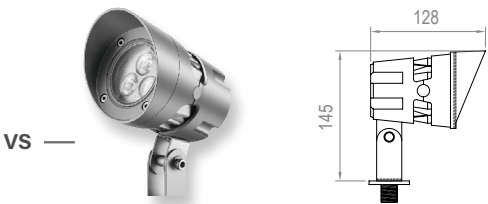


Code	Accessories
------	-------------

- ☐ VL-IV9
- ☐ *SPK SPIKE
- ☐ *BX Elevated Box
- ☐ *CBLX Special length cable

** Must be used with Type F*
** Must be used with Type F*
** Instead of X, put length of cable needed*
Example: VL-IV9-CBL-10m

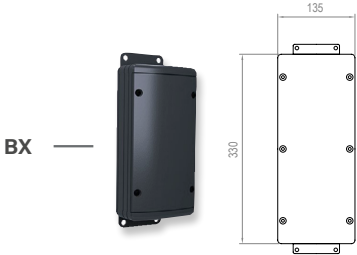

*iota***LAMP**

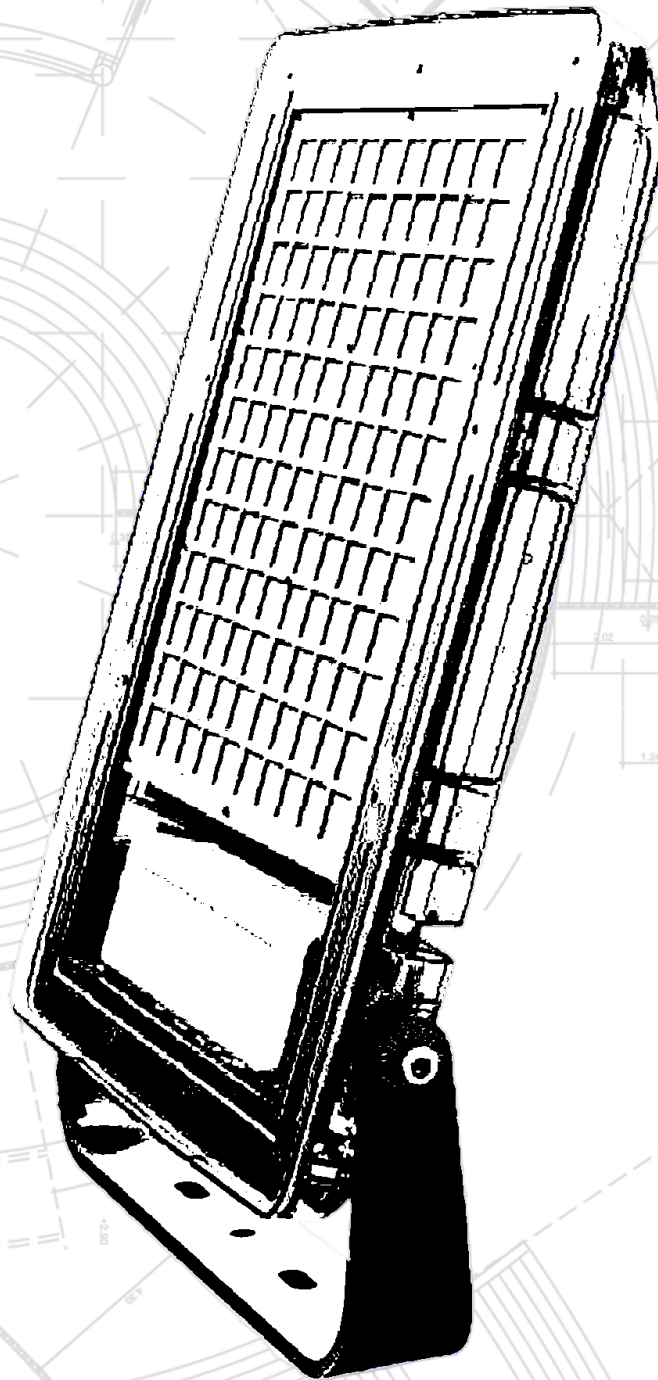

RECTANGULAR PROJECTORS

*iota***LAMP**



KUBO.25



KUBO.16



KUBO.9



KUBO.4



KUBO.1



KUBO.0



KUBO.MIN





KUBO.NANO

RECTANGULAR PROJECTORS
KUBO SERIES

KUBO.25

*iota*LAMP



RECTANGULAR PROJECTORS KUBO SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KUB25	☐ A Base ☐ B Base 2 ☐ C Pole Arm	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 90W ☐ 120W	☐ 1,5° (90W) ☐ 2,5° ☐ 4,5° ☐ 8° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70° ☐ ASYM	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 120W	☐ 4,5° ☐ 8° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 150W	☐ 8° ☐ 15° ☐ 20° ☐ 30° ☐ 60° ☐ 15x60°	☐ UNIV 100-264Vac ☐ 36 36Vdc	☐ DALI ☐ DMX ☐ CAS Casambi
			☐ RGBW4 4 in 1 Chip RGB+W4000K				
			☐ RGBW7 7 in 1 Chip RGBWCLA				

Reference example

VL-KUB25-C-DK-W60-120W-60°-UNIV-STD

Variations



A
Base




B
Base 2




C
Pole Arm
D=45mm


Dimensions

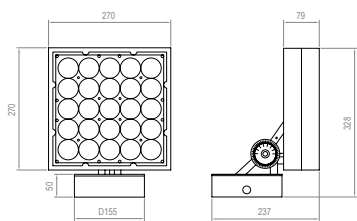

TYPE A

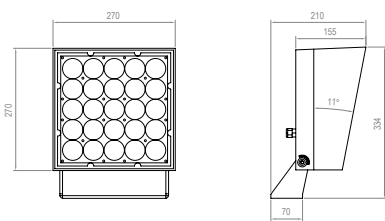

TYPE B

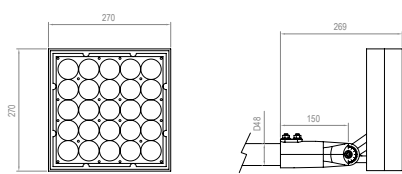

TYPE C


Accessories

Code	Accessories
☐ VL-KUB25	☐ HC Honeycomb Grid
	☐ MSH Mesh

HC



MSH




Code	Accessories
☐ VL-KUB25	☐ SHD Shields
	☐ *1BR Bracket for 1 projector
	☐ *2BR Bracket for 2 projector
	☐ *CBLX Special length cable

** Must be used with Type C*
** Must be used with Type C*
** Instead of X, put length of cable needed*
Example: VL-KUB25-CBL-10m



SHD



1BR





2BR



KUBO.16

*iota***LAMP**



RECTANGULAR PROJECTORS KUBO SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KUB16	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 50W ☐ 75W	☐ 1,5° (50W) ☐ 2,5° ☐ 4,5° ☐ 8° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70° ☐ ASYM	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 75W	☐ 2,5° ☐ 6° ☐ 12° ☐ 20° ☐ 30° ☐ 40° ☐ 60° ☐ 5x20° ☐ 10x70°	☐ UNIV 100-264Vac	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 100W	☐ 15° ☐ 20° ☐ 30° ☐ 60° ☐ 15x60°	☐ UNIV 100-264Vac ☐ 36 36Vdc	☐ DALI ☐ DMX ☐ CAS Casambi
			☐ RGBW4 4 in 1 Chip RGB+W4000K				
			☐ RGBW7 7 in 1 Chip RGBWCLA				

Reference example

VL-KUB16-C-DK-W60-75W-20°-UNIV-STD

Variations



A
Base




B
Base 2



C
Pole Arm
D=45mm




D
Pole mounted
D67-325mm




E
Stripe mounted


Dimensions




TYPE A




TYPE B

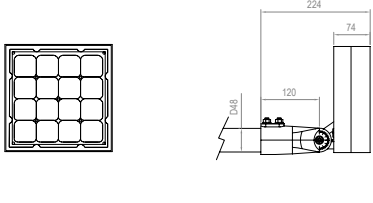

TYPE C



TYPE D





TYPE E

Accessories

Code	Accessories
------	-------------






- ☐ VL-KUB16
- ☐ HC Honeycomb Grid
- ☐ MSH Mesh



Code	Accessories
------	-------------



- ☐ VL-KUB16
- ☐ SHD Shields
- ☐ *1BR Bracket for 1 projector
- ☐ *2BR Bracket for 2 projector
- ☐ *CBLX Special length cable

** Must be used with Type C*
** Must be used with Type C*
** Instead of X, put length of cable needed*
Example: VL-KUB25-CBL-10m



KUBO.9

*iota*LAMP



RECTANGULAR PROJECTORS KUBO SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KUB9	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 45W	☐ 2° ☐ 8° ☐ 20° ☐ 40° ☐ 5x20° ☐ ASYM	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 45W	☐ 4,5° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K	☐ 60W	☐ 15° ☐ 30° ☐ 15x60°	☐ UNIV 100-264Vac ☐ 36 36Vdc	☐ DALI ☐ DMX ☐ CAS Casambi

Reference example

VL-KUB9-A-DK-W30-45W-2,5°-UNIV-DALI

Variations



A
Base




B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions

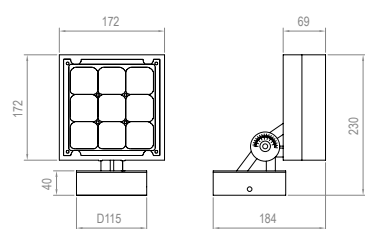


TYPE A

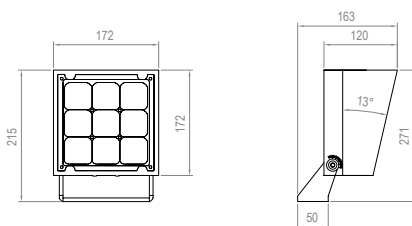


TYPE B

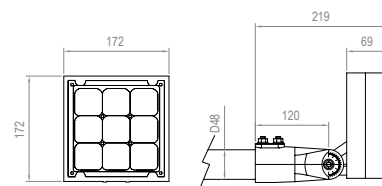


TYPE C



TYPE D

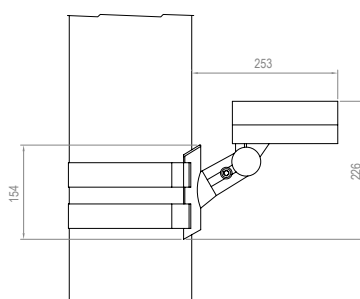

TYPE E

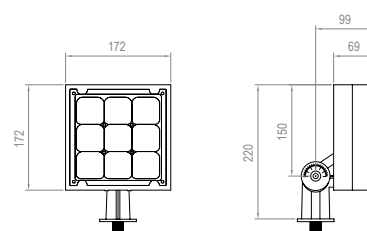

TYPE F


Accessories

Code	Accessories
------	-------------

- ☐ VL-KUB9
- ☐ HC Honeycomb Grid
- ☐ MSH Mesh



HC



MSH

Code	Accessories
------	-------------

- ☐ VL-KUB9
- ☐ SHD Shields
- ☐ *SPK SPIKE
- ☐ *1BR Bracket for 1 projector
- ☐ *2BR Bracket for 2 projector
- ☐ *BX Elevated Box
- ☐ *CBLX Special length cable


** Must be used with Type F*
** Must be used with Type C*
** Must be used with Type C*
** Must be used with Type F*
** Instead of X, put length of cable needed*
Example: VL-KUB9-CBL-10m




SHD





SPK

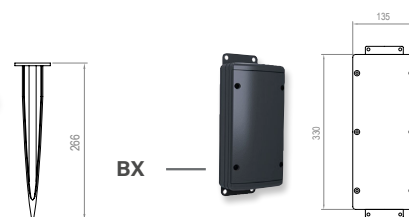


BX



1BR




2BR



KUBO.4

*iota***LAMP**



RECTANGULAR PROJECTORS KUBO SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KUB4	☐ A Base ☐ B Base 2 ☐ C Pole Arm ☐ D Pole mounted ☐ E Stripe mounted ☐ F Nut	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 20W	☐ 2° ☐ 8° ☐ 20° ☐ 40° ☐ 5x20° ☐ ASYM	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 20W	☐ 4,5° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
RGBW							
			☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K	☐ 20W ☐ 30W	☐ 8° ☐ 15° ☐ 30° ☐ 15x60°	☐ 24 24Vdc	☐ DALI ☐ DMX ☐ CAS Casambi

Reference example

VL-KUB4-A-WH-W24-20W-60°-STD

Variations



A
Base




B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions

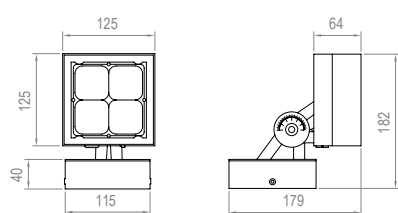


TYPE A

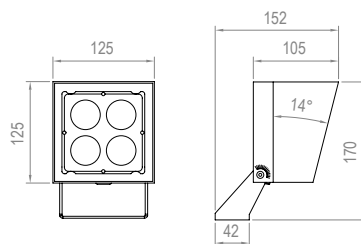


TYPE B

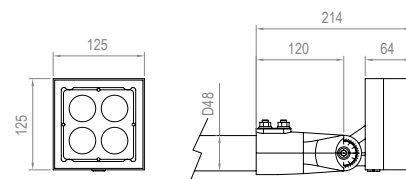


TYPE C



TYPE D

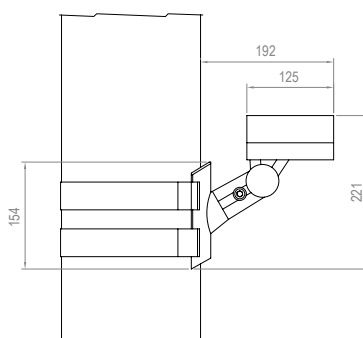

TYPE E

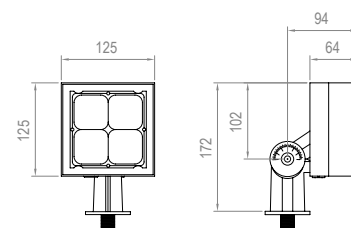

TYPE F


Accessories

Code	Accessories
☐ VL-KUB4	☐ HC Honeycomb Grid
	☐ MSH Mesh

HC



MSH



Code	Accessories
☐ VL-KUB4	☐ SHD Shields
	☐ *SPK SPIKE
	☐ *1BR Bracket for 1 projector
	☐ *2BR Bracket for 2 projector
	☐ *BX Elevated Box
	☐ *CBLX Special length cable

* Must be used with Type F
 * Must be used with Type C
 * Must be used with Type C
 * Must be used with Type F
 * Instead of X, put length of cable needed
 Example: VL-KUB9-CBL-10m


SHD





SPK





BX

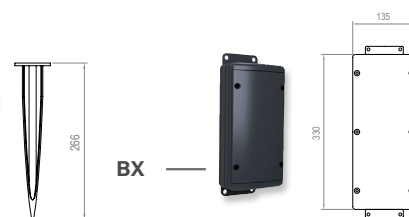

1BR



2BR



KUBO.1

*iota*LAMP



IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



RECTANGULAR PROJECTORS
KUBO SERIES


References

Code	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KUB1	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 10W	☐ 2° ☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ 4,5° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc ☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ CAS Casambi
		Single Color (SC) ☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 10W	☐ 4,5° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ UNIV 100-264Vac ☐ 24 24Vdc ☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ CAS Casambi
		RGBW ☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K	☐ 10W	☐ 8° ☐ 20° ☐ 60°	☐ 15° ☐ 30° ☐ 15x60°	☐ 24 24Vdc ☐ RD Remote DALI ☐ DMX ☐ CAS Casambi

Reference example

VL-KUB1-WH-W24-10W-40°-UNIV-STD


Dimensions

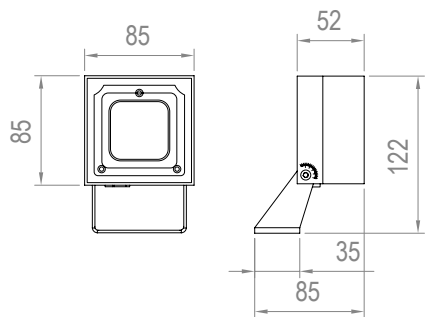

Accessories

Code	Accessories
☐ VL-KUB1	☐ HC Honeycomb Grid


HC





Code	Accessories
☐ VL-KUB1	☐ *SPK SPIKE ☐ *CLP Clap ☐ *VSR Visor ☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-KUB1-CBL-10m*


SPK



CLP




VSR



KUBO.0

iotaLAMP



RECTANGULAR PROJECTORS
KUBO SERIES


References

Code	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KUB.0	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 10W	☐ 2° ☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ 6° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ 24 24Vdc ☐ STD ON/OFF ☐ R Remote 230V ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi
Single Color (SC)						
		☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 10W	☐ 6° ☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ 8° ☐ 20° ☐ 40° ☐ 5x20°	☐ 24 24Vdc ☐ STD ON/OFF ☐ R Remote 230V ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi
RGBW						
		☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K	☐ 10W	☐ 15° ☐ 30° ☐ 15x60°	☐ 20° ☐ 60°	☐ 24 24Vdc ☐ RD Remote DALI ☐ DMX ☐ RCAS Remote Casambi

Reference example

VL-KUB0-WH-W24-10W-12°-24-STD


Dimensions

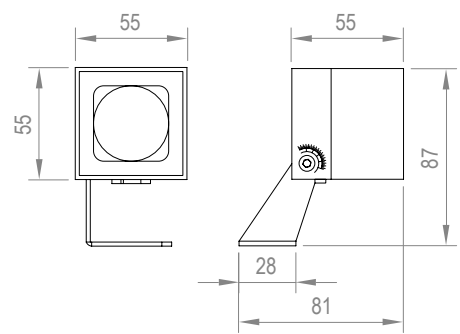

Accessories

Code	Accessories
☐ VL-KUB0	☐ HC Honeycomb Grid


HC





Code	Accessories
☐ VL-KUB0	☐ *SPK SPIKE
	☐ *CLP Clap
	☐ *VSR Visor
	☐ *CBLX Special length cable

* Instead of X, put length of cable needed
Example: VL-KUB0-CBL-10m


SPK



CLP




VSR



KUBO.MIN

iotaLAMP



RECTANGULAR PROJECTORS
KUBO SERIES


References

Code	Finish	Light Color	Power	Lense	Voltage	Driver	
☐ VL-KUB.MIN	☐ LG Light grey	White					
	☐ DK Dark grey	☐ W24 2400K	☐ 6W	☐ 8°	☐ 12°	☐ UNIV	☐ STD ON/OFF
	☐ WH White	☐ W27 2700K		☐ 20°	☐ 30°		☐ R Remote 230V
	☐ BK Black	☐ W30 3000K		☐ 40°	☐ 60°	☐ 12 12Vdc	☐ R010 Remote 0-10V
	☐ RAL Any RAL color	☐ W40 4000K		☐ 15x30°	☐ 10x70°		☐ RD Remote DALI
		☐ W60 6000K					☐ RCAS Remote Casambi
	Single Color (SC)						
	☐ R Red	☐ 6W	☐ 4,5°	☐ 8°	☐ UNIV	☐ STD ON/OFF	
	☐ B Blue		☐ 12°	☐ 20°		☐ R Remote 230V	
	☐ G Green		☐ 30°	☐ 40°	☐ 12 12Vdc	☐ R010 Remote 0-10V	
	☐ A Amber		☐ 60°	☐ 5x20°		☐ RD Remote DALI	
			☐ 10x70°			☐ RCAS Remote Casambi	
	RGBW						
	☐ RGBW3	☐ 6W	4 in 1 Chip	☐ 20°	☐ 40°	☐ 12 12Vdc	☐ RD Remote DALI
	RGB+W3000K		☐ 60°	☐ 15x30°		☐ DMX	
			☐ 15x60°			☐ RCAS Remote Casambi	
	☐ RGBW4		4 in 1 Chip				
			RGB+W4000K				

Reference example

VL-KUB.MIN-WH-W24-10W-12°-UNIV-STD


Dimensions

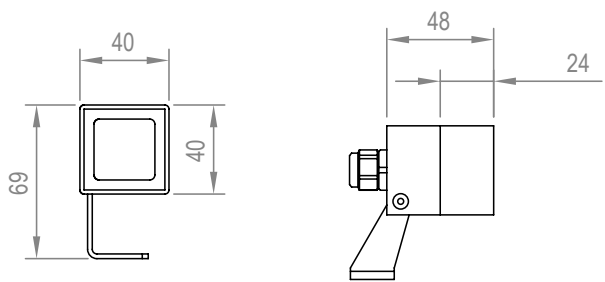

Accessories

Code	Accessories
☐ VL-KUB.MIN	☐ HC Honeycomb Grid


HC




Code	Accessories
☐ VL-KUB.MIN	☐ *POLE Pole ☐ *CLP Clap ☐ *VSR Visor ☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-KUB.MIN-CBL-10m*


POLE

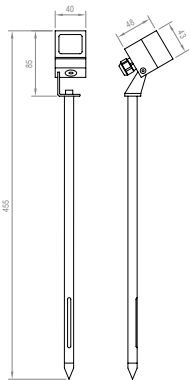

CLP





VSR



KUBO.NANO

*iota*LAMP



RECTANGULAR PROJECTORS
KUBO SERIES


References

Code	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KUB.NANO	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 3W	☐ 20° ☐ 45° ☐ 25x45°	☐ 30° ☐ 60° ☐ 12 12Vdc ☐ 24 24Vdc	☐ STD ON/OFF ☐ R Remote 230V ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi
		Single Color (SC) ☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 3W	☐ 20° ☐ 45° ☐ 25x45°	☐ 30° ☐ 60° ☐ 12 12Vdc ☐ 24 24Vdc	☐ STD ON/OFF ☐ R Remote 230V ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi

Reference example

VL-KUB.NANO-WH-W24-10W-12°-UNIV-STD


Dimensions

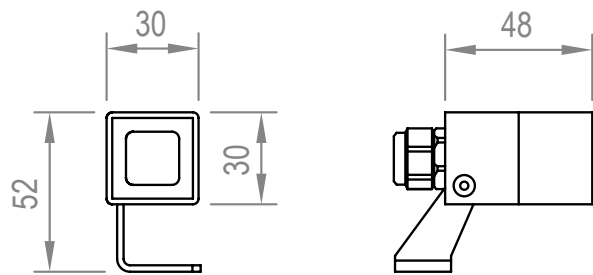

Accessories

Code	Accessories
☐ VL-KUB.NANO	☐ HC Honeycomb Grid


HC




Code	Accessories
☐ VL-KUB.NANO	☐ *POLE Pole
	☐ *CLP Clap
	☐ *VSR Visor
	☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-KUB.NANO-CBL-10m*


POLE

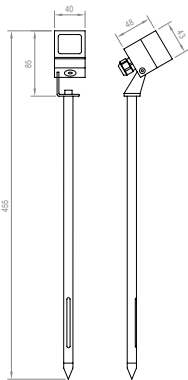

CLP



VSR



*íota***LAMP**



KAPIK.50



KAPIK.25





KAPIK.16

RECTANGULAR PROJECTORS
KAPIK SERIES



KAPIK.50

*iota*LAMP



RECTANGULAR PROJECTORS
KAPIK SERIES


References

Code	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KP50	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 150W ☐ 185W ☐ 225W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ STD ON/OFF
Single Color (SC)						
	☐ R Red ☐ B Blue ☐ G Green ☐ A Amber		☐ 150W ☐ 185W ☐ 225W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ STD ON/OFF

Reference example

VL-KP50-DK-W60-150W-60°-UNIV-STD


Dimensions

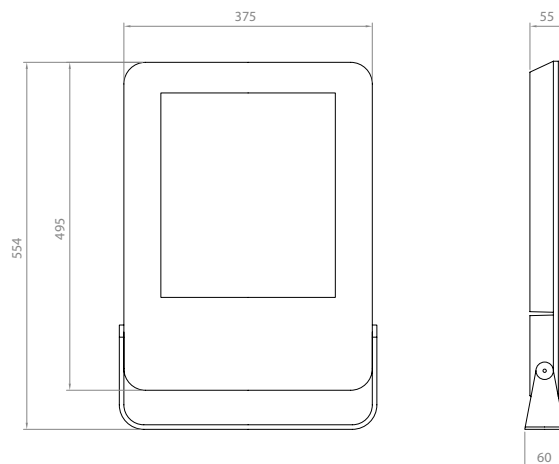



KAPIK.25

*iota***LAMP**



RECTANGULAR PROJECTORS
KAPIK SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KP25	☐ A Base ☐ B Base 2	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 60W ☐ 82W ☐ 102W ☐ 120W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ ASYM (60W)	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ STD ON/OFF
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 60W ☐ 82W ☐ 102W ☐ 120W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30°	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ STD ON/OFF

Reference example

VL-KP25-DK-W40-60W-ASYM-UNIV-STD

Variations




A
Base




B
Base 2

Dimensions

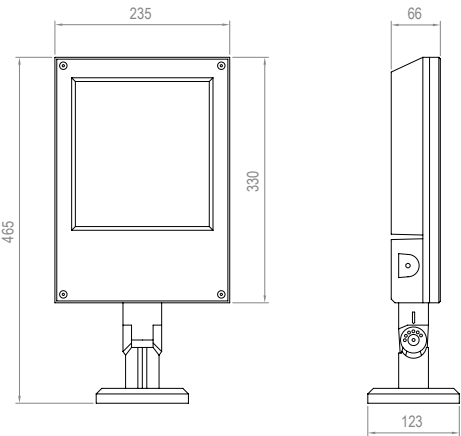

TYPE A


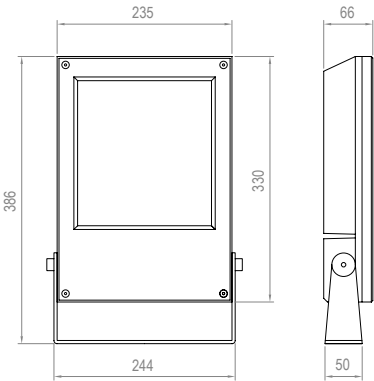


TYPE B



KAPIK.16

*iota***LAMP**



RECTANGULAR PROJECTORS
KAPIK SERIES


References

Code	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-KP16	☐ LG Light grey ☐ DK Dark grey ☐ WH White ☐ BK Black ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 22W ☐ 30W ☐ 36W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ ASYM (30W)	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ STD ON/OFF
		Single Color (SC) ☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 22W ☐ 30W ☐ 36W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ ASYM (30W)	☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ STD ON/OFF


Reference example

VL-KP16-DK-W40-30W-ASYM-UNIV-STD

Dimensions

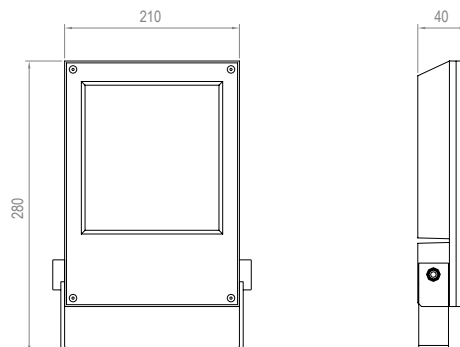


*iota***LAMP**

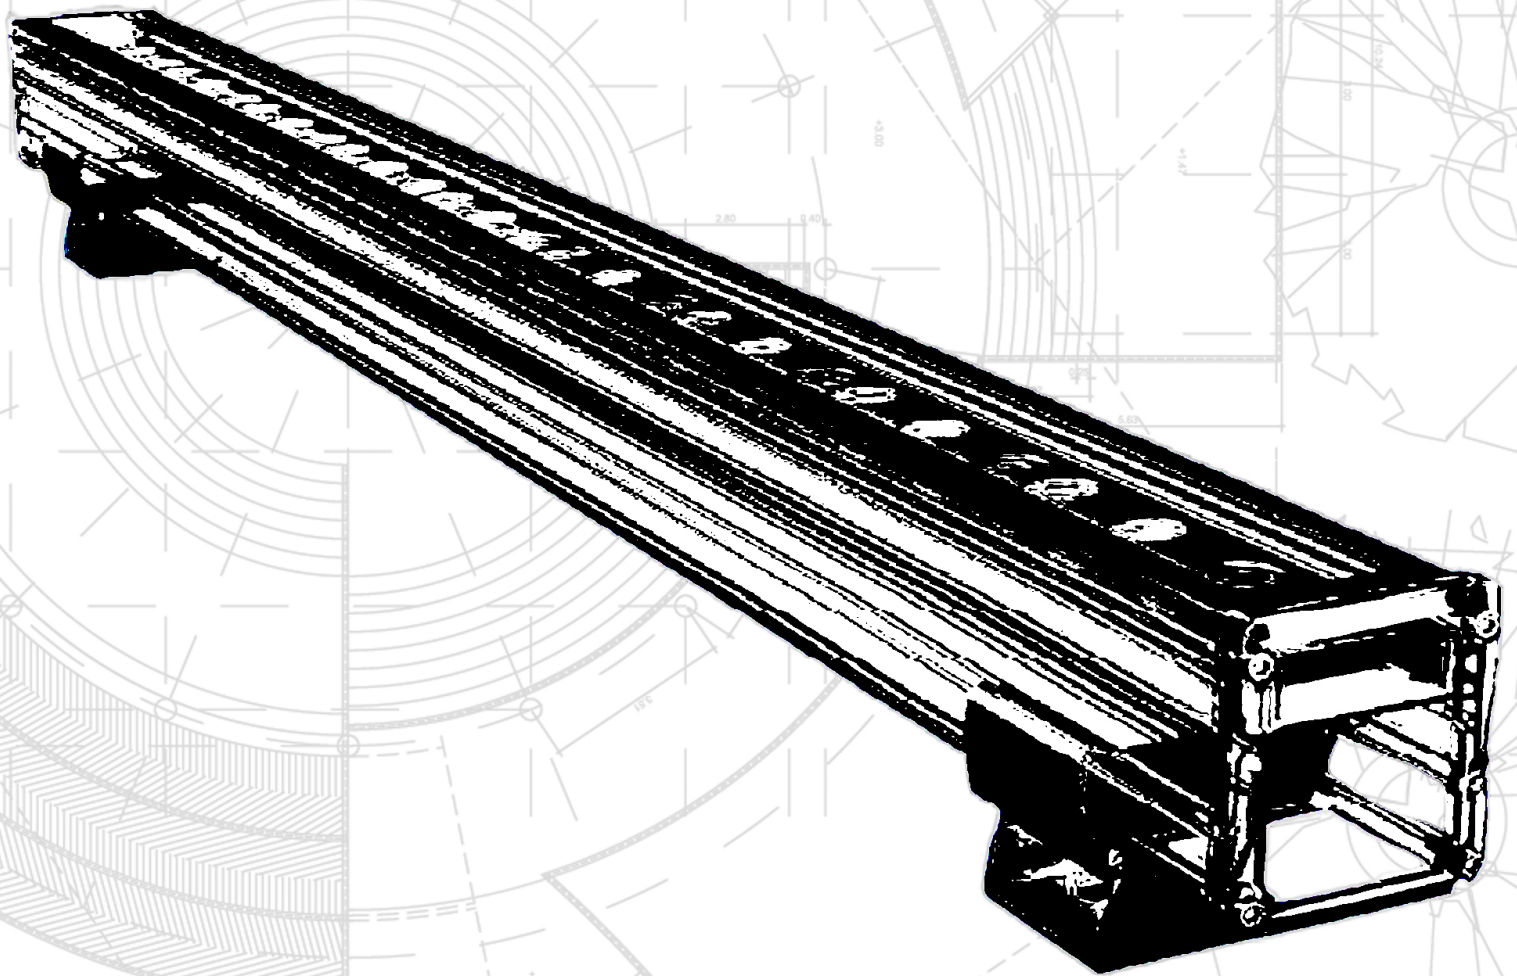

LINNERS SERIES


*iota***LAMP**

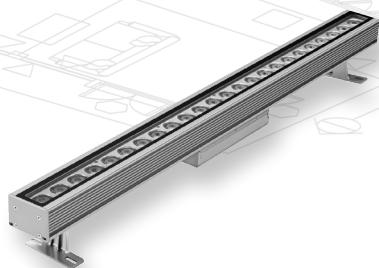

LINNEA.100



LINNEA.60

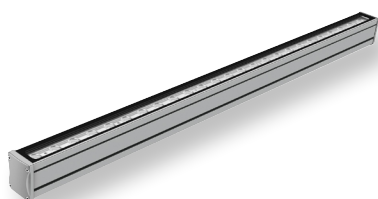

LINNEA.50



LINNEA.40




LINNEA.30



MAXLINE



LINNEA.CURVE

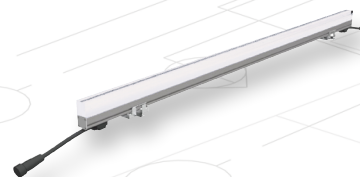

LINNEA.TUBE

LINNERS
LINNEA SERIES

LINNEA.100 *iota*LAMP



IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



LINNERS
LINNEA SERIES


References

Code	Finish	Light Color	Lenght-Power	Lense	Voltage	Driver
☐ VL-LN.100	☐ LG Light grey ☐ RAL Any RAL color	White				
		☐ W24 2400K	☐ 300mm-60W	☐ 2,5°	☐ 6°	☐ UNIV 100-264Vac
		☐ W27 2700K	☐ 500mm-100W	☐ 12°	☐ 20°	☐ STD ON/OFF
		☐ W30 3000K	☐ 1000mm-200W	☐ 30°	☐ 40°	☐ 010 0-10V
		☐ W40 4000K		☐ 60°	☐ 10x70°	☐ DALI
		☐ W60 6000K		☐ 5x20°		☐ CAS Casambi
		Single Color (SC)				
		☐ R Red	☐ 300mm-60W	☐ 6°	☐ 12°	☐ UNIV 100-264Vac
		☐ B Blue	☐ 500mm-100W	☐ 20°	☐ 30°	☐ STD ON/OFF
		☐ G Green	☐ 1000mm-200W	☐ 40°	☐ 60°	☐ 010 0-10V
		☐ A Amber		☐ 10x70°	☐ 5x20°	☐ DALI
						☐ CAS Casambi
		RGBW				
		☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 500mm-100W ☐ 1000mm-200W	☐ 15° ☐ 30° ☐ 10x30°	☐ 20° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac
		☐ RGBW4 4 in 1 Chip RGB+W4000K				☐ DALI
		☐ RGBW7 7 in 1 Chip RGBWCLA				☐ DMX
						☐ CAS Casambi

Reference example


VL-LN100-RGB3-500mm-100W-60-UNIV-DMX

Dimensions

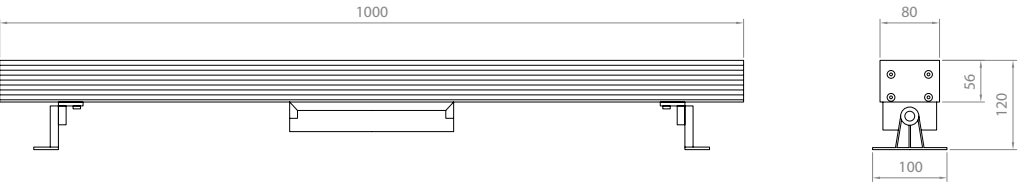

Accessories


Code	Accessories
☐ VL-LN.100	☐ HC Honeycomb Grid



Code	Accessories
☐ VL-LN.100	☐ IO In&out cable with connectors
	☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-LN100-CBL-10m*

LINNEA.60 *iota*LAMP

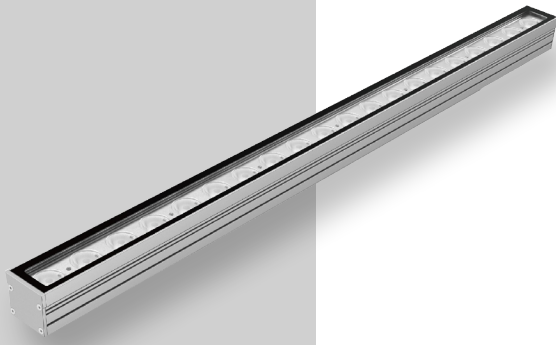

IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



LINNERS
LINNEA SERIES


References

Code	Finish	Light Color	Lenght-Power	Lense	Voltage	Driver
☐ VL-LN.60	☐ LG Light grey ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 300mm-30W ☐ 500mm-48W ☐ 1000mm-95W	☐ 2,5° ☐ 12° ☐ 30° ☐ 60° ☐ 5x20°	☐ 6° ☐ 20° ☐ 40° ☐ 10x70°	☐ UNIV 100-264Vac ☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)						
	☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 300mm-30W ☐ 500mm-48W ☐ 1000mm-95W	☐ 6° ☐ 20° ☐ 40° ☐ 10x70°	☐ 12° ☐ 30° ☐ 60° ☐ 5x20°	☐ UNIV 100-264Vac ☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi	
RGBW						
☐ RGBW3 4 in 1 Chip RGB+W3000K		☐ 500mm-50W ☐ 1000mm-100W	☐ 15° ☐ 30° ☐ 10x30°	☐ 20° ☐ 60° ☐ 10x60°	☐ 24 24Vdc ☐ DALI ☐ DMX ☐ CAS Casambi	
☐ RGBW4 4 in 1 Chip RGB+W4000K						
☐ RGBW7 7 in 1 Chip RGBWCLA						

Reference example

VL-LN.60-R-300mm-30W-6-UNIV-STD



Dimensions

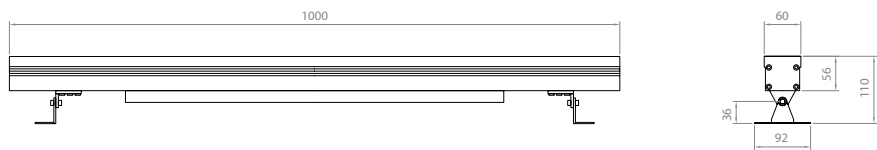

Accessories

Code	Accessories
------	-------------


- ☐ VL-LN.60
- ☐ HC Honeycomb Grid
- ☐ VS Visor




Code	Accessories
------	-------------

- ☐ VL-LN.60
- ☐ XLL Extra long legs
- ☐ IO In&out cable with connectors
- ☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-LN60-CBL-10m*



LINNEA.50 *iota*LAMP

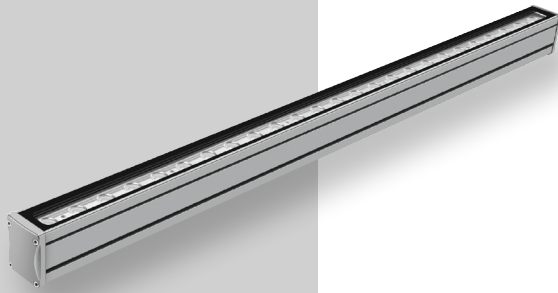

IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



LINNERS
LINNEA SERIES


References

Code	Finish	Light Color	Lenght-Power	Lense	Voltage	Driver
☐ VL-LN.50	☐ LG Light grey ☐ RAL Any RAL color	White				
		☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 500mm-11W ☐ 1000mm-14W ☐ 1000mm-22W ☐ 1000mm-28W ☐ 1000mm-42W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ ASYM	☐ 12,5° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 24 24Vdc ☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
		Single Color (SC)				
		☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 500mm-11W ☐ 1000mm-14W ☐ 1000mm-22W ☐ 1000mm-28W ☐ 1000mm-42W	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ ASYM	☐ 12,5° ☐ 30° ☐ 60° ☐ 10x60°	☐ UNIV 100-264Vac ☐ 24 24Vdc ☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
		RGBW				
		☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K	☐ 1000mm-72W	☐ 20° ☐ 60°	☐ 30° ☐ 15x60° ☐ 36 36Vdc	☐ DALI ☐ DMX ☐ CAS Casambi

Reference example

VL-LN.50-W27-1000mm-42W-10x60-UNIV-STD



Dimensions

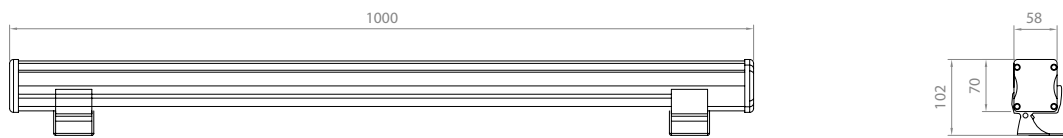

Accessories

Code	Accessories
------	-------------

- ☐ VL-LN.50
- ☐ HC Honeycomb Grid
- ☐ VS Visor



Code	Accessories
------	-------------

- ☐ VL-LN.50
- ☐ IO In&out cable with connectors
- ☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-LN60-CBL-10m*

LINNEA.40 *iota*LAMP



IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I




LINNERS
LINNEA SERIES

References

Code	Finish	Light Color	Lenght-Power	Lense	Voltage	Driver
☐ VL-LN.40	☐ LG Light grey ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 300mm-8W ☐ 500mm-9W ☐ 500mm-12W ☐ 500mm-18W ☐ 500mm-24W ☐ 1000mm-18W ☐ 1000mm-24W ☐ 1000mm-36W	☐ 6° ☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ UNIV 100-264Vac (only for 1000mm) ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi
Single Color (SC)						
	☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 300mm-8W ☐ 500mm-9W ☐ 500mm-12W ☐ 500mm-18W ☐ 500mm-24W ☐ 1000mm-18W ☐ 1000mm-24W ☐ 1000mm-36W	☐ 6° ☐ 12° ☐ 30° ☐ 60° ☐ 10x60°	☐ 8° ☐ 20° ☐ 40° ☐ 15x30° ☐ UNIV 100-264Vac (only for 1000mm) ☐ 24 24Vdc	☐ STD ON/OFF ☐ 010 0-10V ☐ DALI ☐ CAS Casambi	
RGBW						
☐ RGBW3 4 in 1 Chip RGB+W3000K		☐ 300mm-12W ☐ 500mm-18W ☐ 1000mm-36W	☐ 20° ☐ 60° ☐ 15x25°	☐ 40° ☐ 15x60° ☐ 24 24Vdc	☐ DMX	
☐ RGBW4 4 in 1 Chip RGB+W4000K		☐ 1000mm-48W				


Reference example

VL-LN.40-R-300mm-8W-8-24-STD

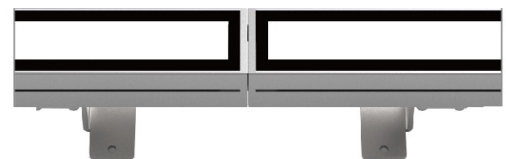

Soft light effect with no gaps



Dimensions

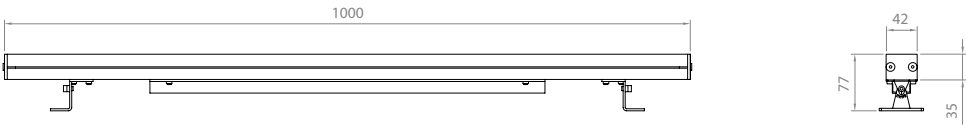

Accessories


Code	Accessories
------	-------------

- ☐ VL-LN.40
- ☐ HC Honeycomb Grid
- ☐ VS Visor



Code	Accessories
------	-------------

- ☐ VL-LN.40
- ☐ XLL Extra long legs
- ☐ IO In&out cable with connectors
- ☐ *CBLX Special length cable
- * Instead of X, put length of cable needed
Example: VL-LN40-CBL-10m*



LINNEA.30 *iota*LAMP



IP66	IK09	CREE XP-G	RECYCLE
FAILURE RATE < 0,1% after 25,000h	LIFE TIME Tested over 50,000h	MIN -20°C MAX 55°C	CLASE I
SP US	CE	RoHS	RoHS

LINNERS
LINNEA SERIES


References

Code	Finish	Light Color	Lenght-Power	Lense	Voltage	Driver
☐ VL-LN.30	☐ LG Light grey ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 300mm-6W ☐ 500mm-9W ☐ 500mm-12W ☐ 1000mm-18W ☐ 1000mm-24W	☐ 20° ☐ 45° ☐ 30° ☐ 60° ☐ 25x45°	☐ 24 24Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote Dali ☐ CAS Casambi
		Single Color (SC) ☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 300mm-6W ☐ 500mm-9W ☐ 500mm-12W ☐ 1000mm-18W ☐ 1000mm-24W	☐ 20° ☐ 45° ☐ 30° ☐ 60° ☐ 25x45°	☐ 24 24Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote Dali ☐ CAS Casambi
		RGBW ☐ RGBW3 4 in 1 Chip RGB+W3000K ☐ RGBW4 4 in 1 Chip RGB+W4000K	☐ 300mm-6W ☐ 500mm-9W ☐ 500mm-12W ☐ 1000mm-18W ☐ 1000mm-24W	☐ 20° ☐ 45° ☐ 30° ☐ 60° ☐ 25x45°	☐ 24 24Vdc	☐ DMX

Reference example


VL-LN.30-RGBW3-1000mm-24W-60-24-DMX

Dimensions

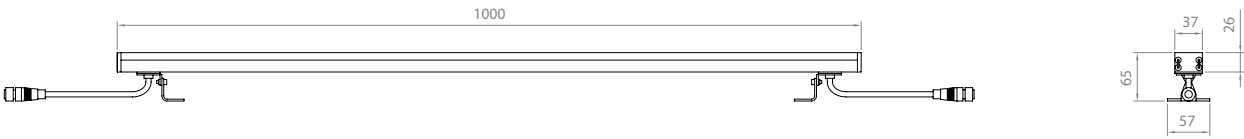

Accessories

Code	Accessories
☐ VL-LN.30	☐ HC Honeycomb Grid





Code	Accessories
☐ VL-LN.30	☐ IO In&out cable with connectors ☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-LN40-CBL-10m*

MAXLINE

iotaLAMP




LINNERS
LINNEA SERIES

References


Code	Finish	Light Color	Lenght-Power	Lense	Voltage	Driver
☐ VL-MXL	☐ LG Light grey ☐ RAL Any RAL color	White				
		☐ W24 2400K	☐ 300mm-80W	☐ 2,5°	☐ 6°	☐ UNIV 100-264Vac
		☐ W27 2700K	☐ 400mm-120W	☐ 12°	☐ 20°	☐ STD ON/OFF
		☐ W30 3000K	☐ 500mm-160W	☐ 30°	☐ 40°	☐ 010 0-10V
		☐ W40 4000K	☐ 700mm-240W	☐ 60°	☐ 10x70°	☐ DALI
		☐ W60 6000K	☐ 1000mm-300W	☐ 5x20°		☐ CAS Casambi
		Single Color (SC)				
		☐ R Red	☐ 300mm - 80W	☐ 6°	☐ 12°	☐ UNIV 100-264Vac
		☐ B Blue	☐ 400mm - 120W	☐ 20°	☐ 30°	☐ STD ON/OFF
		☐ G Green	☐ 500mm - 160W	☐ 40°	☐ 60°	☐ 010 0-10V
		☐ A Amber	☐ 700mm - 240W	☐ 10x70°	☐ 5x20°	☐ DALI
			☐ 1000mm - 300W			☐ CAS Casambi
		RGBW				
		☐ RGBW3	☐ 300mm-80W	☐ 15°	☐ 20°	☐ UNIV 100-264Vac
		4 in 1 Chip	☐ 400mm-120W	☐ 30°	☐ 60°	☐ DALI
		RGB+W3000K	☐ 500mm-160W	☐ 10x30°	☐ 10x60°	☐ DMX
		☐ RGBW4	☐ 700mm-240W			☐ CAS Casambi
		4 in 1 Chip	☐ 1000mm-300W			
		RGB+W4000K				

Reference example

VL-MXL-W30-700mm-240W-20-UNIV-DALI

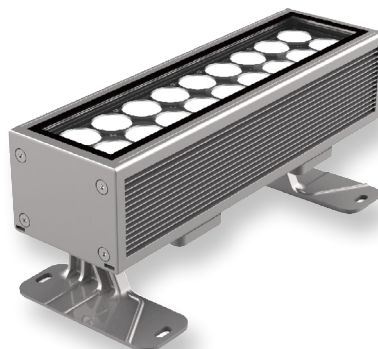


Dimensions

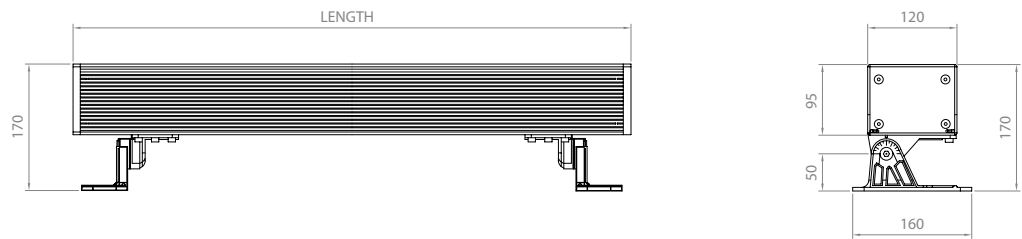

Accessories

Code	Accessories
------	-------------



- ☐ VL-MXL
- ☐ HC Honeycomb Grid
- ☐ VS Visor

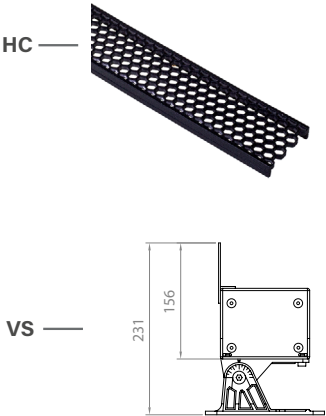

Code	Accessories
------	-------------

- ☐ VL-MXL
- ☐ IO In&out cable with connectors
- ☐ *CBLX Special length cable
- * Instead of X, put length of cable needed*
- Example: VL-LN40-CBL-10m*

LINNEA.CURVE *iota*LAMP



LINNERS
LINNEA SERIES


References

Code	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-LN.CU	☐ LG Light grey	White				
	☐ RAL Any RAL color	☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 6W ☐ 12W ☐ 15W	☐ 6° ☐ 20° ☐ 40° ☐ 5x20°	☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc ☐ STD ON/OFF ☐ 010 0-10V ☐ RD Remote Dali ☐ CAS Casambi
		Single Color (SC)				
		☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 6W ☐ 12W ☐ 15W	☐ 6° ☐ 20° ☐ 40° ☐ 5x20°	☐ 12° ☐ 30° ☐ 60° ☐ 10x70°	☐ UNIV 100-264Vac ☐ 24 24Vdc ☐ STD ON/OFF ☐ 010 0-10V ☐ RD Remote Dali ☐ CAS Casambi
		RGBW				
		☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ 12W ☐ 24W	☐ 20° ☐ 60° ☐ 15x25°	☐ 40° ☐ 15x60°	☐ 24 24Vdc ☐ DMX
		☐ RGBW4 4 in 1 Chip RGB+W4000K				

Reference example

VL-LN.CU-W40-12W-60-UNIV-STD

Dimensions

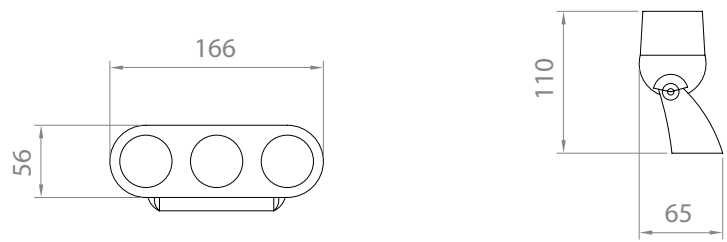

Accessories


Code	Accessories
------	-------------

☐ VL-LN.CU


- ☐ *L1 Short support
- ☐ *L2 Long support
- ☐ *CL1 Connection short leg
- ☐ *CL2 Connection long leg
- ☐ *EL1 End short leg
- ☐ *EL2 End long leg
- ☐ *CBLX Special length cable

** For individual mounting*
** For individual mounting*
** For continous line mounting - short intermediate connection leg*
** For continous line mounting - long intermediate connection leg*
** For continous line mounting - short end leg*
** For continous line mounting - long end leg*
** Instead of X, put length of cable needed*
Example: VL-LN40-CBL-10m



L1 —





CL1 —



L2 —



CL2 —

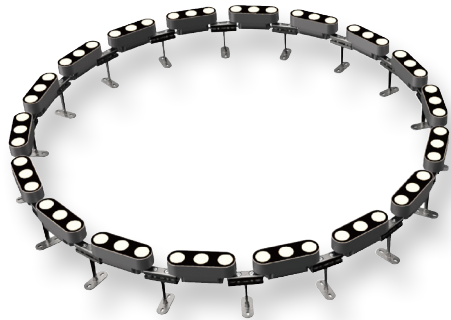

LINNEA.TUBE

*iota*LAMP



IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



LINNERS
LINNEA SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver
☐ VL-LN.TUB	☐ A No enclosure ☐ B Square short ☐ C Square long ☐ D Round	☐ LG Light grey ☐ RAL Any RAL color	White ☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K	☐ 6W ☐ 10W ☐ 15W	☐ 30° (Type A) ☐ 60° (Type A) ☐ 120°	☐ 24 24Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ CAS Casambi
Single Color (SC)							
			☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 6W ☐ 10W ☐ 15W	☐ 30° (Type A) ☐ 60° (Type A) ☐ 120°	☐ 24 24Vdc	☐ STD ON/OFF ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ CAS Casambi
RGBW							
	☐ RGBW3 4 in 1 Chip RGB+W3000K			☐ 6W ☐ 10W ☐ 15W	☐ 30° (Type A) ☐ 60° (Type A) ☐ 120°	☐ 24 24Vdc	☐ DMX
	☐ RGBW4 4 in 1 Chip RGB+W4000K						

Reference example

VL-LN.TUB-B-LG-W24-10W-120-24-R010

Variations




A

No enclosure




B

Square short



C


Square long





D

Round



Dimensions

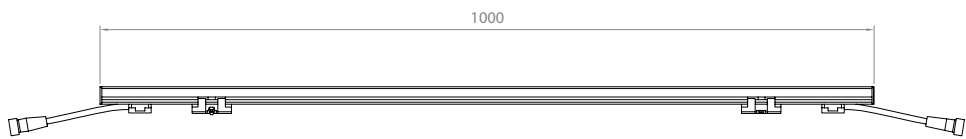



TYPE A

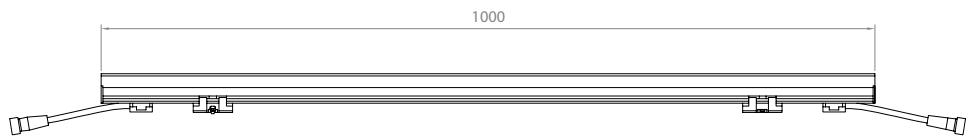


TYPE B

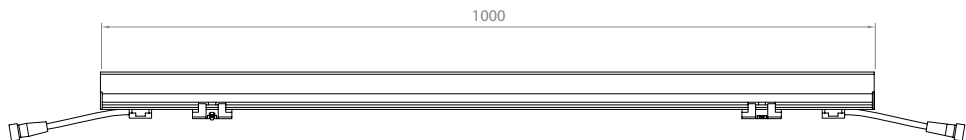

TYPE C

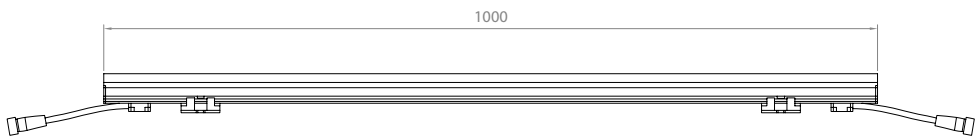

TYPE D




Accessories

Code	Accessories
------	-------------

- ☐ VL-LN.TUB
- ☐ IO In&out cable with connectors
- ☐ *CBLX Special length cable
- * Instead of X, put length of cable needed*

Example: VL-LNTUBE-CBL-10m

*iota***LAMP**

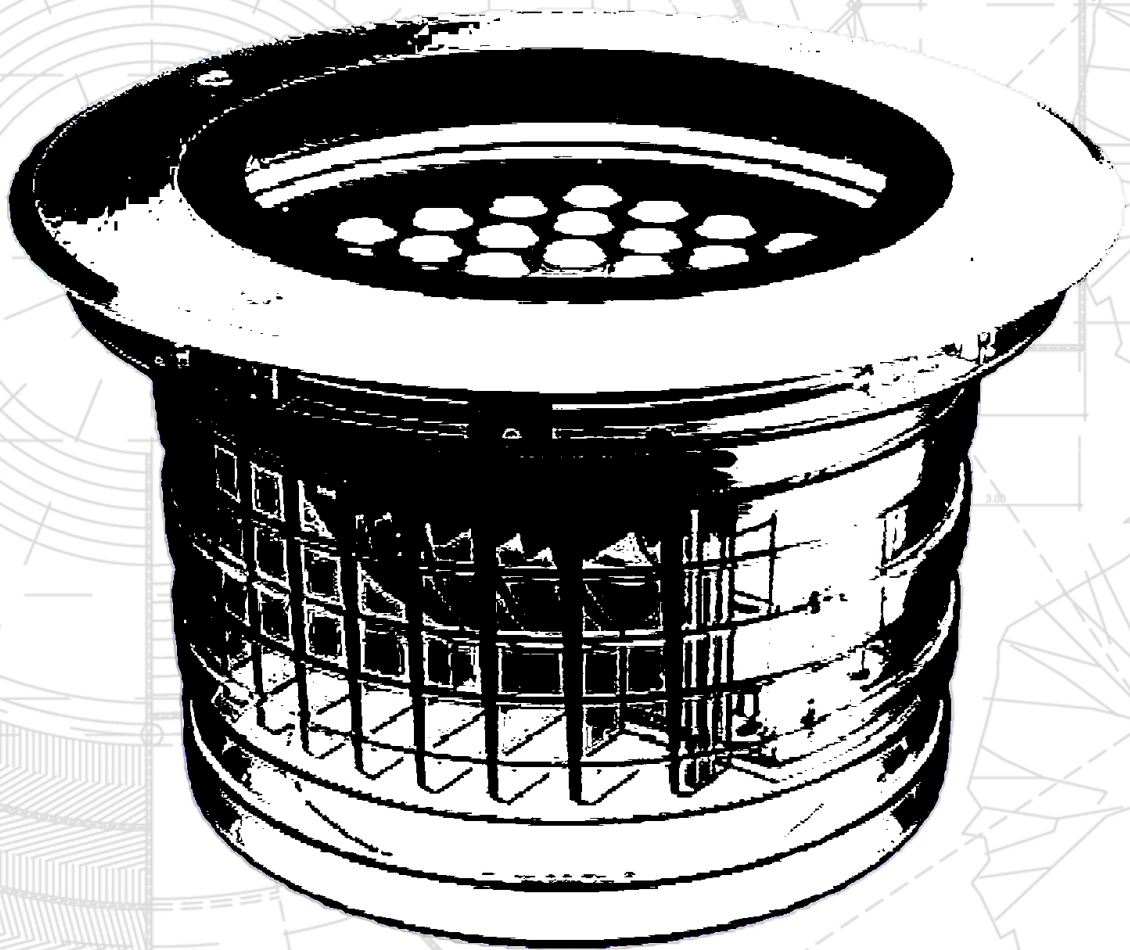

UNDERGROUND SERIES

*iota***LAMP**



UGE



UCE



UGN



UGS




TURTLE



UNDERLINE.100



UNDERLINE.80





WUS

**UNDERGROUND
UNDERGROUND SERIES**



UGE

iotaLAMP




**UNDERGROUND
UNDERGROUND SERIES**

References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-UGE	White				
	☐ W24 2400K	☐ Size A-10W	☐ 2°	☐ 4,5°	☐ UNIV 100-264Vac
	☐ W27 2700K	☐ Size B-10W	☐ 8°	☐ 12°	☐ STD ON/OFF
	☐ W30 3000K	☐ Size C-20W	☐ 20°	☐ 30°	☐ 010 0-10V
	☐ W40 4000K	☐ Size D-15W	☐ 40°	☐ 60°	☐ DALI
	☐ W60 6000K	☐ Size D-30W	☐ 5x20°	☐ 10x70°	☐ CAS Casambi
		☐ Size E-25W			
		☐ Size E-50W			
		☐ Size F-45W			
		☐ Size F-90W			
	Single Color (SC)				
	☐ R Red	☐ Size A-10W	☐ 4,5°	☐ 8°	☐ UNIV 100-264Vac
	☐ B Blue	☐ Size B-10W	☐ 12°	☐ 20°	☐ STD ON/OFF
	☐ G Green	☐ Size C-20W	☐ 30°	☐ 40°	☐ 010 0-10V
	☐ A Amber	☐ Size D-15W	☐ 60°	☐ 5x20°	☐ DALI
		☐ Size D-30W	☐ 10x70°		☐ CAS Casambi
		☐ Size E-25W			
		☐ Size E-50W			
		☐ Size F-45W			
		☐ Size F-90W			
	RGBW				
	☐ RGBW3	☐ Size A-10W	☐ 15°	☐ 20°	☐ UNIV 100-264Vac
	4 in 1 Chip	☐ Size B-10W	☐ 30°	☐ 60°	(only size C,D,E,F)
	RGB+W3000K	☐ Size C-20W	☐ 15x60°		☐ DMX
	☐ RGBW4	☐ Size D-30W			☐ 12 Vdc
	4 in 1 Chip	☐ Size E-50W			(only size A)
	RGB+W4000K	☐ Size F-90W			☐ 24 Vdc
					(only size B)

Reference example

VL-UGE-W27-Size B-10W-2 -UNIV-STD




Orientation
system from outside


Variations



SIZE A
D=100mm




SIZE B
D=135mm




SIZE C
D=185mm



SIZE D
D=215mm




SIZE E
D=280mm




SIZE F
D=300mm


Dimensions




SIZE A




SIZE B




SIZE C






SIZE D



SIZE E



SIZE F



Accessories

Stainless steel recessed box is always included with the projector

Code	Accessories
------	-------------


☐ VL-UGE

☐ *CBLX Special length cable

* Instead of X, put length of cable needed
Example: VL-UGE-CBL-10m

UCE

iotaLAMP



UNDERGROUND
UNDERGROUND SERIES

References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-UCE	White				
	☐ W24 2400K	☐ Size A-15W	☐ 2°	☐ 4,5°	☐ UNIV 100-264Vac
	☐ W27 2700K	☐ Size A-30W	☐ 8°	☐ 12°	☐ STD ON/OFF
	☐ W30 3000K	☐ Size B-40W	☐ 20°	☐ 30°	☐ 010 0-10V
	☐ W40 4000K	☐ Size B-80W	☐ 40°	☐ 60°	☐ DALI
	☐ W60 6000K	☐ Size C-60W	☐ 5x20°	☐ 10x70°	☐ CAS Casambi
	☐ Size C-120W				
	Single Color (SC)				
	☐ R Red	☐ Size A-15W	☐ 4,5°	☐ 8°	☐ UNIV 100-264Vac
	☐ B Blue	☐ Size A-30W	☐ 12°	☐ 20°	☐ STD ON/OFF
	☐ G Green	☐ Size B-40W	☐ 30°	☐ 40°	☐ 010 0-10V
	☐ A Amber	☐ Size B-80W	☐ 60°	☐ 5x20°	☐ DALI
	☐ Size C-60W	☐ 10x70°			☐ CAS Casambi
	☐ Size C-120W				
	RGBW				
	☐ RGBW3	☐ Size C-150W	☐ 15°	☐ 20°	☐ UNIV 100-264Vac
	4 in 1 Chip		☐ 30°	☐ 60°	☐ DMX
	RGB+W3000K		☐ 15x60°		
	☐ RGBW4				
	4 in 1 Chip				
	RGB+W4000K				
	☐ RGBW7				
	7in1 chip				
	RGBWCLA				
	(Only for size C)				

Reference example

VL-UCE-W27-Size C-60W-5x20 -UNIV-STD

Variations




SIZE A
220x220mm



SIZE B
270x270mm




SIZE C
320x320mm


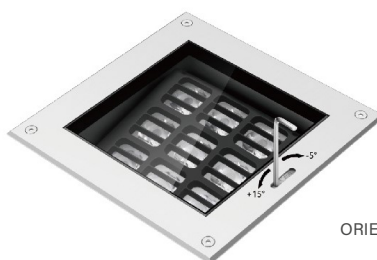


ORIENTED FROM OUTSIDE



Dimensions




SIZE A



SIZE B



SIZE C



Accessories

Stainless steel recessed box is always included with the projector

Code	Accessories
------	-------------


- ☐ **VL-UCE**
- ☐ ***CBLX** Special length cable
- * Instead of X, put length of cable needed*

Example: VL-UCE-CBL-10m



UGO

iotaLAMP



UNDERGROUND
UNDERGROUND SERIES


References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-UGO	White				
☐ W24 2400K	☐ Size A-16W	☐ 6°	☐ 8°	☐ UNIV 100-264Vac	☐ STD ON/OFF
☐ W27 2700K	☐ Size B-14W	☐ 12°	☐ 20°	☐ 24 24Vdc	☐ 010 0-10V
☐ W30 3000K	☐ Size B-32W	☐ 30°	☐ 40°		☐ DALI
☐ W40 4000K	☐ Size C-42W	☐ 60°	☐ 5x20°		☐ CAS Casambi
☐ W60 6000K	☐ Size C-60W	☐ 10x70°			
Single Color (SC)					
☐ R Red	☐ Size A-16W	☐ 6°	☐ 8°	☐ UNIV 100-264Vac	☐ STD ON/OFF
☐ B Blue	☐ Size B-14W	☐ 12°	☐ 20°	☐ 24 24Vdc	☐ 010 0-10V
☐ G Green	☐ Size B-32W	☐ 30°	☐ 40°		☐ DALI
☐ A Amber	☐ Size C-42W	☐ 60°	☐ 5x20°		☐ CAS Casambi
	☐ Size C-60W	☐ 10x70°			
RGBW					
☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ Size C-100W	☐ 15° ☐ 30° ☐ 15x60°	☐ 20° ☐ 60°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ DMX
☐ RGBW4 4 in 1 Chip RGB+W4000K					

Reference example

VL-UGO-W30-Size B-32W-10x70 -UNIV-DALI

Variations



SIZE A
220x220mm




SIZE B
270x270mm




SIZE C
320x320mm


Dimensions






SIZE A



SIZE B




SIZE C



Accessories

Stainless steel recessed box is always included with the projector


Code	Accessories
☐ VL-UGO	☐ HC Honeycomb Grid
	☐ MSH Mesh



Code	Accessories
☐ VL-UGO	☐ *CBLX Special length cable
<i>* Instead of X, put length of cable needed Example: VL-UGO-CBL-10m</i>	

UGN

iotaLAMP



UNDERGROUND
UNDERGROUND SERIES


References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-UGN	White				
	☐ W24 2400K	☐ Size A-3,5W	☐ 8°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ W27 2700K	☐ Size A-6W	☐ 20°	☐ 12 12Vdc	☐ 010 0-10V
	☐ W30 3000K	☐ Size B-7W	☐ 45°		☐ DALI
	☐ W40 4000K	☐ Size B-12W	☐ 15x30°		☐ CAS Casambi
	☐ W60 6000K	☐ Size C-11W	☐ 12°		
		☐ Size C-16W	☐ 30°		
		☐ Size D-14W	☐ 60°		
		☐ Size D-22W	☐ 10x60°		
		☐ Size E-21W			
		☐ Size E-30W			
		☐ Size E-40W			
		☐ Size F-56W			
		☐ Size F-70W			
	Single Color (SC)				
	☐ R Red	☐ Size A-3,5W	☐ 8°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ B Blue	☐ Size A-6W	☐ 20°	☐ 12 12Vdc	☐ 010 0-10V
	☐ G Green	☐ Size B-7W	☐ 45°		☐ DALI
	☐ A Amber	☐ Size B-12W	☐ 15x30°		☐ CAS Casambi
		☐ Size C-11W	☐ 12°		
		☐ Size C-16W	☐ 30°		
		☐ Size D-14W	☐ 60°		
		☐ Size D-22W	☐ 10x60°		
		☐ Size E-21W			
		☐ Size E-30W			
		☐ Size E-40W			
		☐ Size F-56W			
		☐ Size F-70W			
	RGBW				
	☐ RGBW3	☐ Size E-72W	☐ 15°	☐ UNIV 100-264Vac	☐ DMX
	4 in 1 Chip		☐ 30°	☐ 24 24Vdc	
	RGB+W3000K		☐ 15x60°		
	☐ RGBW4				
	4 in 1 Chip				
	RGB+W4000K				


Reference example

VL-UGN-B-Size E-40W-30 -UNIV-STD

Variations




SIZE A
D=110mm



SIZE B
D=130mm



SIZE C
D=150mm



SIZE D
D=210mm




SIZE E
D=260mm




SIZE F
D=330mm


Dimensions







SIZE A




SIZE B




SIZE C






SIZE D



SIZE E



SIZE F



Accessories

Code	Accessories
☐ VL-UGN	☐ HC Honeycomb Grid
	☐ MSH Mesh

HC



MSH



Aluminum recessed box is always included with the projector


Code	Accessories
☐ VL-UGN	☐ *CBLX Special length cable

* Instead of X, put length of cable needed
Example: VL-UGN-CBL-10m



UGS

iotaLAMP



UNDERGROUND
UNDERGROUND SERIES

References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-UGS	White				
	☐ W24 2400K	☐ Size A - 22W	☐ 2,5°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ W27 2700K	☐ Size A - 30W	☐ 12°	☐ 24 24Vdc	☐ 010 0-10V
	☐ W30 3000K	☐ Size B - 35W	☐ 30°		☐ DALI
	☐ W40 4000K	☐ Size B - 45W	☐ 60°		☐ CAS Casambi
	☐ W60 6000K	☐ Size C - 60W	☐ 5x20°		
		☐ Size C - 75W			
		☐ Size D - 85W			
		☐ Size D -120W			
	Single Color				
	☐ (SC)	☐ Size A - 22W	☐ 2,5°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ R Red	☐ Size A - 30W	☐ 12°	☐ 24 24Vdc	☐ 010 0-10V
	☐ B Blue	☐ Size B - 35W	☐ 30°		☐ DALI
	☐ G Green	☐ Size B - 45W	☐ 60°		☐ CAS Casambi
	☐ A Amber	☐ Size C - 60W	☐ 5x20°		
		☐ Size C - 75W			
		☐ Size D - 85W			
		☐ Size D -120W			
	RGBW				
	☐ RGBW3	☐ Size A - 30W	☐ 15°	☐ UNIV 100-264Vac	☐ DMX
	4 in 1 Chip	☐ Size B - 60W	☐ 30°	☐ 36 36Vdc	
	RGB+W3000K	☐ Size C - 100W	☐ 15x60°		
	☐ RGBW4	☐ Size D - 150W			
	4 in 1 Chip				
	RGB+W4000K				

Reference example

VL-UGS-RGBW3-Size C-100W-30 -UNIV-DMX

Variations



SIZE A
208mm



SIZE B
238mm





SIZE C
286mm





SIZE D
350mm



Dimensions





SIZE A



SIZE B




SIZE C



SIZE D

Accessories

Code	Accessories
☐ VL-UGS	☐ HC Honeycomb Grid
	☐ MSH Mesh
	Stainless steel recessed box is always included with the projector



Code	Accessories
☐ VL-UGS	☐ *CBLX Special length cable
	<i>* Instead of X, put length of cable needed</i>
	<i>Example: VL-UGS-CBL-10m</i>

Description

External 30 degree integrated Hood to avoid glare.
For additional anti-glare solutions, order round-Meshed grill and honeycomb grid.

UGS uplight has CCC, CE, ETL certificates and a patented optical design.

Lenses can be customize for an accurate lighting effect. Available angles are: 2,5° - 6° - 12° - 20° - 30° - 45° - 60° - 10x70° or 5x20°


The patented body structure allows the projector to be adjusted 15dg vertically and horizontally after base installation. Electrical parts are 130mm above ground for extra water safety.

Body is made in high pressure die casting aluminum with more than 2,5mm thickness to increase robustness. Double layer fluorocarbon coating provides excellent corrosion resistance.



UNDERLINE.100

*iota*LAMP

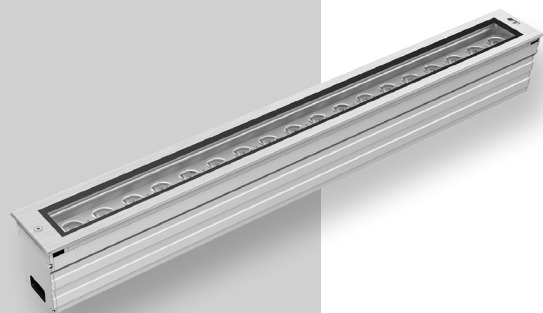

IP67



IK10



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



UNDERGROUND

UNDERGROUND SERIES


References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-UND.100	White				
☐ W24 2400K	☐ 300 mm - 20W	☐ 2,5°	☐ 6°	☐ UNIV 100-264Vac	☐ STD ON/OFF
☐ W27 2700K	☐ 300mm - 30W	☐ 12°	☐ 20°	☐ 24 24Vdc	☐ 010 0-10V
☐ W30 3000K	☐ 500mm - 30W	☐ 30°	☐ 40°		☐ DALI
☐ W40 4000K	☐ 500mm - 50W	☐ 60°	☐ 5x20°		☐ CAS Casambi
☐ W60 6000K	☐ 1000mm - 60W	☐ 10x70			
	☐ 1000mm - 100W				
Single Color (SC)					
☐ R Red	☐ 300mm - 20W	☐ 6°	☐ 12°	☐ UNIV 100-264Vac	☐ STD ON/OFF
☐ B Blue	☐ 300mm - 30W	☐ 20°	☐ 30°	☐ 24 24Vdc	☐ 010 0-10V
☐ G Green	☐ 500mm - 30W	☐ 40°	☐ 60°		☐ DALI
☐ A Amber	☐ 500mm - 50W	☐ 5x20°			☐ CAS Casambi
	☐ 1000mm - 60W	☐ 10x70°			
	☐ 1000mm - 100W				
RGBW					
☐ RGBW3	☐ 300mm - 20W	☐ 15°	☐ 20°	☐ UNIV 100-264Vac	☐ DMX
4 in 1 Chip	☐ 300mm - 30W	☐ 30°	☐ 60°	☐ 24 24Vdc	
RGB+W3000K	☐ 500mm - 30W	☐ 10x30°	☐ 10x60°		
☐ RGBW4	☐ 500mm - 50W				
4 in 1 Chip	☐ 1000mm - 60W				
RGB+W4000K	☐ 1000mm - 100W				

Reference example

VL-UND.100-B-1000-100W-5x20-24-DALI

Dimensions

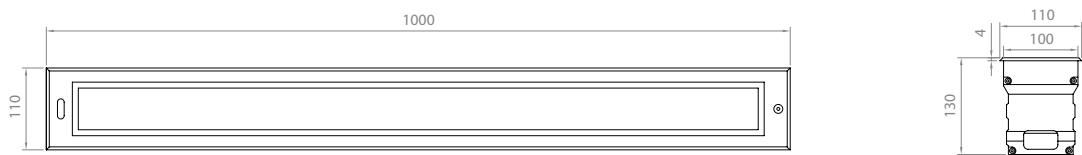

Accessories


Code	Accesories
☐ VL-UND.100	☐ HC Honeycomb Grid ☐ MSH Mesh+Grid Stainless steel recessed box is always included with the projector

Code	Accesories
☐ VL-UND.100	☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-UND.100-CBL-10m*

UNDERLINE.80

*iota*LAMP

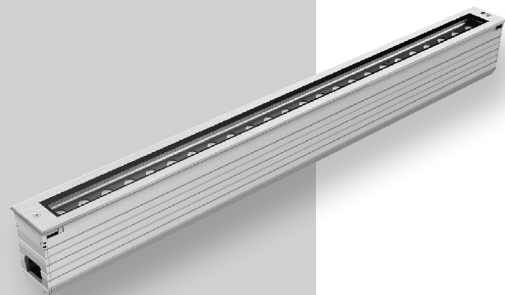

IP67



IK10



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



UNDERGROUND

UNDERGROUND SERIES


References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-UND.80	White				
☐ W24 2400K	☐ 300mm - 7W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac	☐ STD ON/OFF
☐ W27 2700K	☐ 300mm - 11W	☐ 20°	☐ 30°	☐ 24 24Vdc	☐ 010 0-10V
☐ W30 3000K	☐ 500mm - 11W	☐ 45°	☐ 60°		☐ DALI
☐ W40 4000K	☐ 500mm - 14W	☐ 15x30°	☐ 10x60°		☐ CAS Casambi
☐ W60 6000K	☐ 1000mm - 21W				
	☐ 1000mm - 28W				
	☐ 1000mm - 45W				
Single Color (SC)					
☐ R Red	☐ 300mm - 7W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac	☐ STD ON/OFF
☐ B Blue	☐ 300mm - 11W	☐ 20°	☐ 30°	☐ 24 24Vdc	☐ 010 0-10V
☐ G Green	☐ 500mm - 11W	☐ 45°	☐ 60°		☐ DALI
☐ A Amber	☐ 500mm - 14W	☐ 15x30°	☐ 10x60°		☐ CAS Casambi
	☐ 1000mm - 21W				
	☐ 1000mm - 28W				
	☐ 1000mm - 45W				
RGBW					
☐ RGBW3	☐ 500mm - 12W	☐ 15°	☐ 20°	☐ UNIV 100-264Vac	☐ DMX
4 in 1 Chip	☐ 500mm - 24W	☐ 30°	☐ 60°	☐ 24 24Vdc	
RGB+W3000K	☐ 1000mm - 48W	☐ 10x30°	☐ 10x60°		
☐ RGBW4					
4 in 1 Chip					
RGB+W4000K					

Reference example

VL-UND.80-R-1000-100W-5x20-UNIV-STD

Dimensions

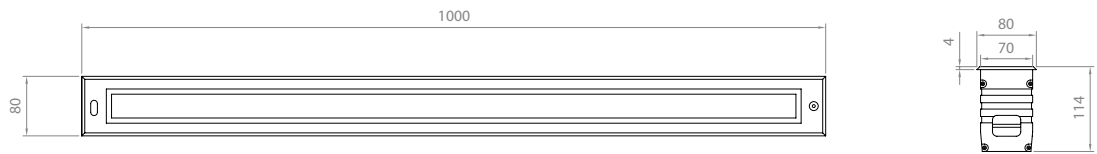

Accessories



Code	Accessories
☐ VL-UND.80	☐ HC Honeycomb Grid
	Stainless steel recessed box is always included with the projector

Code	Accessories
☐ VL-UND.80	☐ *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-UND.80-CBL-10m*

TURTLE

iotaLAMP



UNDERGROUND
UNDERGROUND SERIES

References

Code	Finish	Light Color	Lenght-Power	Lense	Voltage	Driver
☐ VL-TRT	☐ LG Light grey ☐ DK Dark grey ☐ BK Black ☐ RAL Any RAL color	Low power - Wide beam				
		☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K ☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 4W	☐ 60° ☐ 2x60° ☐ 4x60° ☐ 12x15°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ R Remote 230V ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi
		High power				
		☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K ☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 10W	☐ 5° ☐ 15° ☐ 30° ☐ 60° ☐ 2x5° ☐ 2x15° ☐ 2x30° ☐ 2x60°	☐ UNIV 100-264Vac ☐ 24 24Vdc	☐ STD ON/OFF ☐ R Remote 230V ☐ R010 Remote 0-10V ☐ RD Remote DALI ☐ RCAS Remote Casambi


Reference example

VL-TRT-DK-W60-10W-2x15°-UNIV-STD

Low power




High power

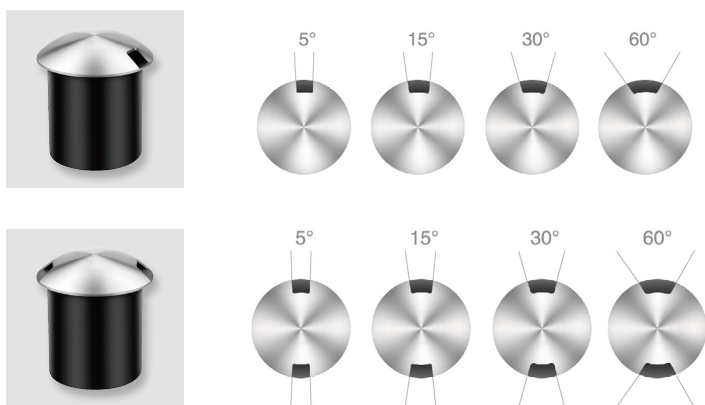


Dimensions

Low power

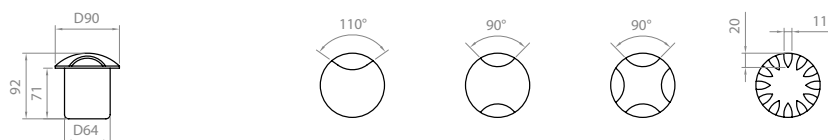

High power

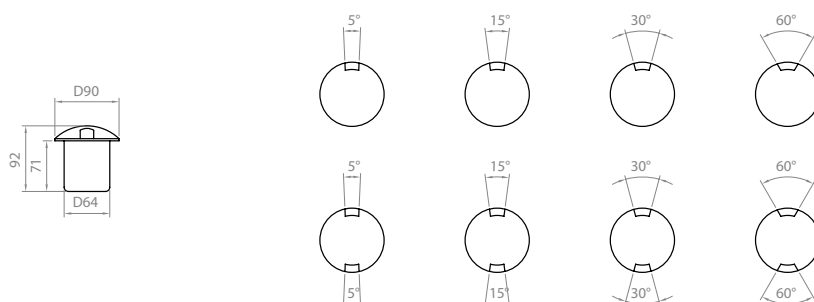

Accessories

Code	Accessories
------	-------------



☐ VL-TRT

☐ *CBLX Special length cable

* Instead of X, put length of cable needed
Example: VL-TRT-CBL-10m

WUS

iotaLAMP



UNDERGROUND
UNDERGROUND SERIES

References


Code	Finish	Light Color	Power	Lense		Voltage-Current	Driver
☐ VL-WUS*	☐ SS Stainless Steel	☐ W24 2400K	☐ 0,5W	☐ 3°	☐ 6°	☐ 350 CC350mA	☐ STD ON/OFF
	☐ BK Black	☐ W27 2700K	☐ 1W	☐ 10°	☐ 15°		☐ R Remote 230V
	☐ BR Brass	☐ W30 3000K	☐ 2W	☐ 20°	☐ 25°	☐ 700 CC700mA	☐ R010 Remote 0-10V
	☐ RAL Any RAL color	☐ W40 4000K	☐ 3W	☐ 40°	☐ 60°	☐ 12 12Vdc	☐ RD Remote DALI
		☐ W60 6000K	☐ 4W	☐ 120°	☐ ASYM		☐ RDMX Remote DMX
		☐ R Red	☐ 5W			☐ 24 24Vdc	☐ RPWM Remote PWM
		☐ B Blue	☐ 7W				☐ RTR Remote TRIAC
		☐ G Green					
		☐ A Amber					

* Not all options are available, please refer to table on page 2 to choose the correct reference

Reference example

VL-WUS-SS-W24-3W-20°-700-STD

Dimensions

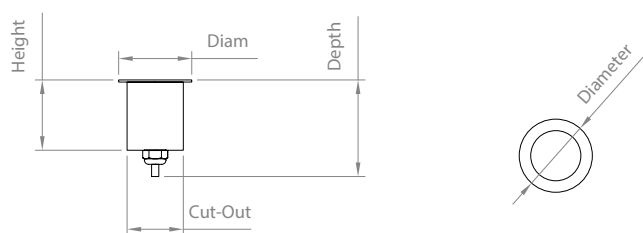

Accessories

Code	Accessories
------	-------------

☐ **VL-WUS**

- ☐ **HC** Honeycomb Grid
- ☐ **HS** Half shield
- ☐ **STS** Star shape shield
- ☐ ***CBLX** Special length cable


** Instead of X, put length of cable needed
Example: VL-WUS-CBL-10m*



Available options


Power	Availabre beam angles	Voltage/Current	Diameter	Height	Cut-Out	Depth needed	Driver support
0,5 W	120	24Vdc	35 mm	31 mm	30 mm	35 mm	On/Off
1 W	25/40/60	CC 350mA	35 mm	31 mm	30 mm	35 mm	DALI/DMX/1-10V/Triac/PWM
1 W	25/40/60	12Vdc / 24Vdc	35 mm	55 mm	30 mm	60 mm	On/Off
2 W	10/15/20/40/60	12Vdc / 24Vdc	52 mm	60 mm	40 mm	65 mm	On/Off
3 W	10/15/20/40/60	CC 700mA	52 mm	48 mm	40 mm	55 mm	DALI/DMX/1-10V/Triac/PWM
4 W	3/6/10/20/40	12Vdc / 24Vdc	64 mm	90 mm	52 mm	100 mm	On/Off
5 W	40/ASYM	24Vdc	79 mm	107 mm	65 mm	120 mm	On/Off
7 W	15/25/40/60	CC 350mA	79 mm	75 mm	65 mm	85 mm	DALI/DMX/1-10V/Triac/PWM
7 W	15/25/40/60	24Vdc	79 mm	102 mm	65 mm	110 mm	On/Off

*iota***LAMP**

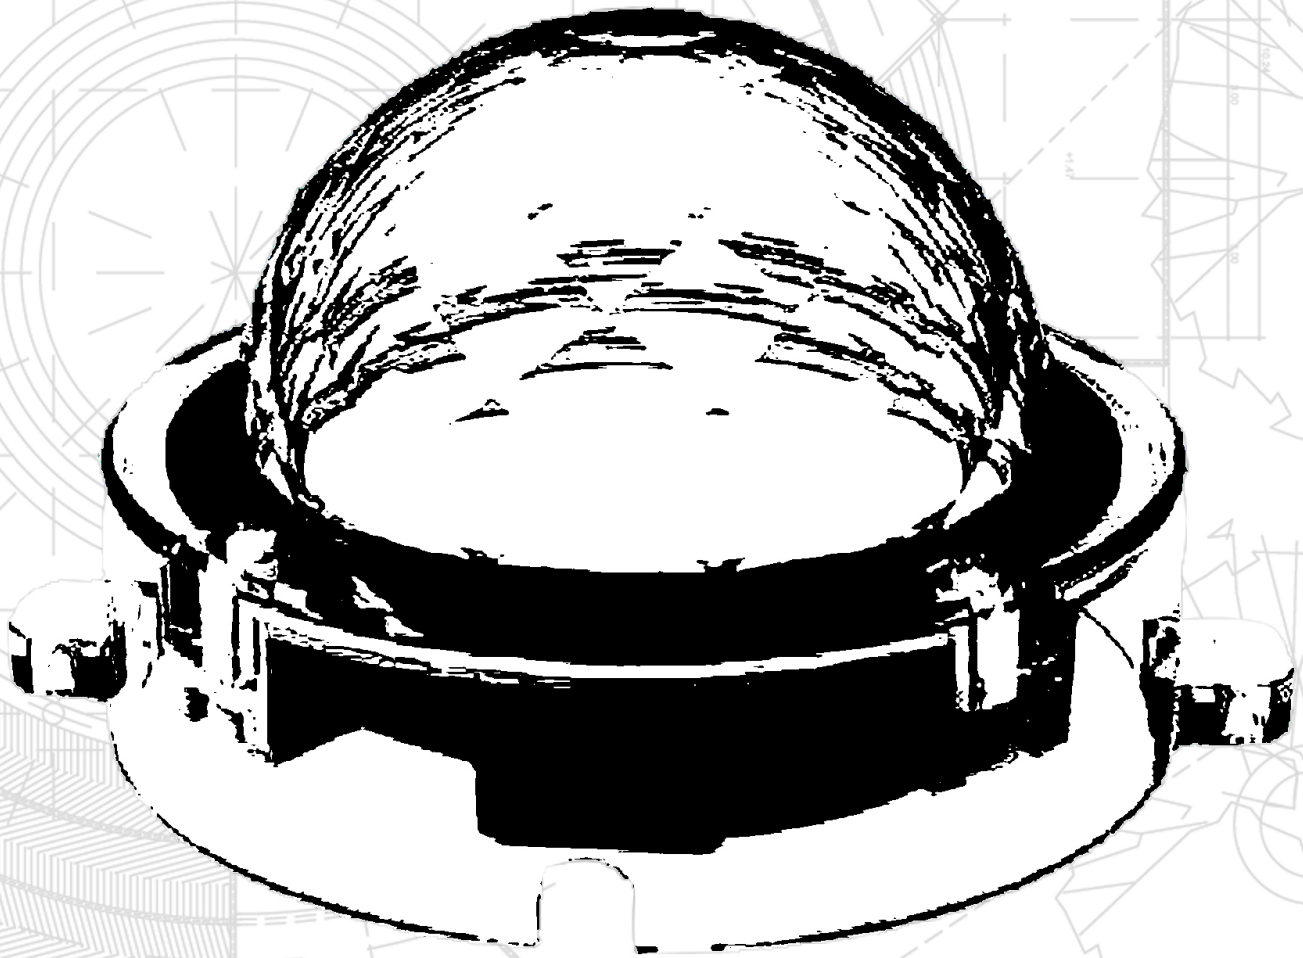


EFFECT SERIES


*iota***LAMP**

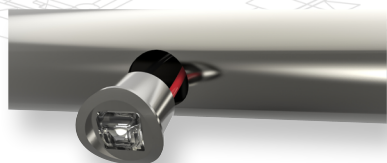


LUUBA



GLIDE

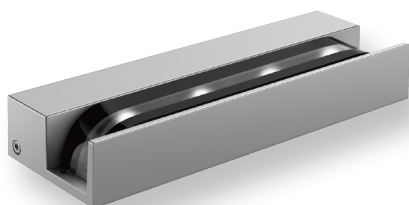

GLIDE.XL



WAYS



SHIFT.UD



SHIFT.D




SHIFT.CL

EFFECTS
EFFECTS

LUUBA

*iota*LAMP

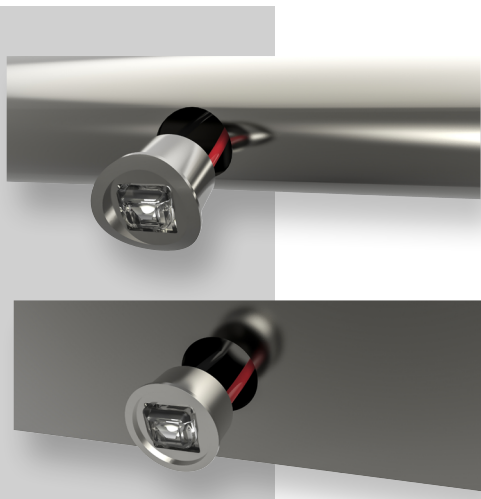

IP67



IK10



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I




EFFECTS
EFFECTS SERIES

References


Code	Shape	Ligth Color	Lense
☐ VL-LUUBA	☐ RD Round ☐ FL Flat	☐ W24 2400K ☐ W27 2700K ☐ W30 3000K ☐ W40 4000K ☐ W60 6000K ☐ R Red ☐ B Blue ☐ G Green ☐ A Amber	☐ 8° ☐ 25° ☐ 40° ☐ 15x45° ☐ W ☐ ASYM2 ☐ 15° ☐ 30° ☐ 50° ☐ 45x15° ☐ ASYM1

Reference example


VL-LUUBA-RD-W24-ASYM2

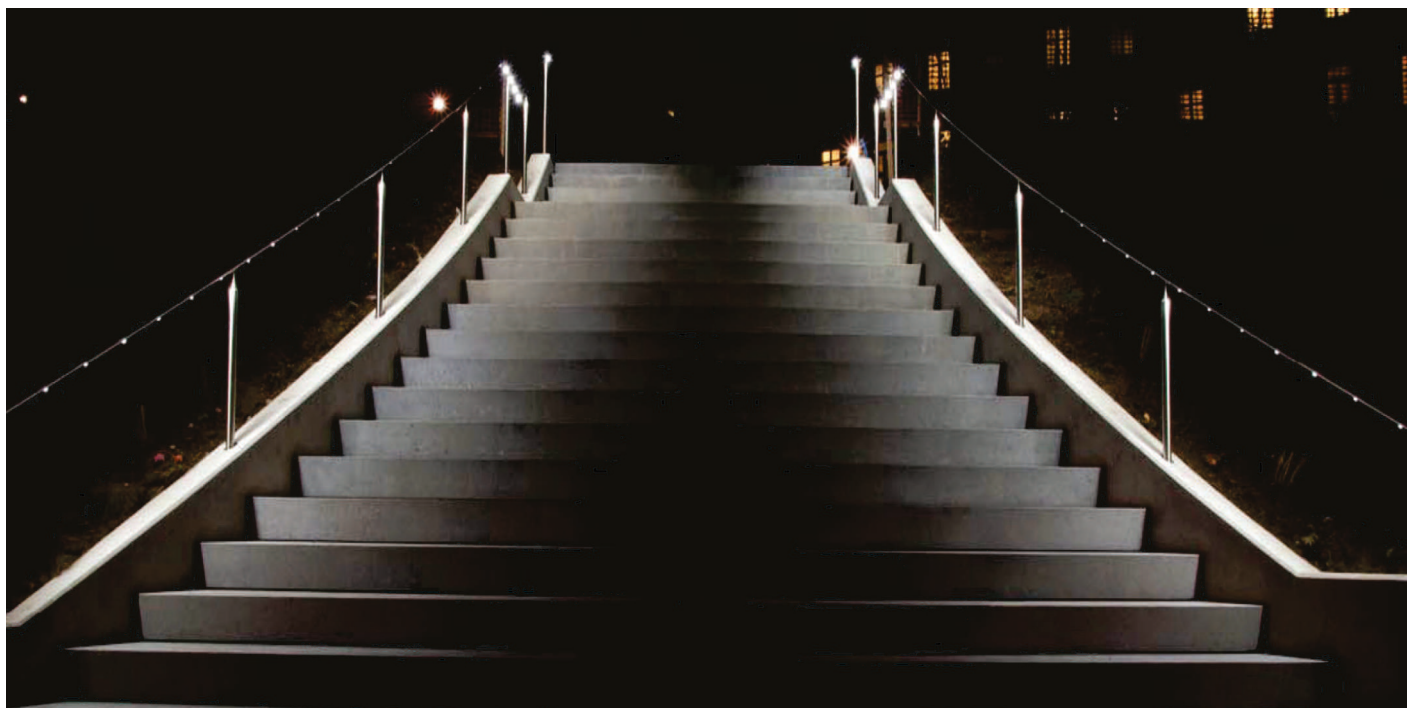

Dimensions

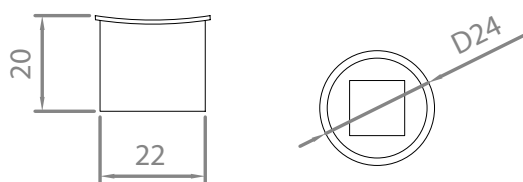



LUUBA ROUND

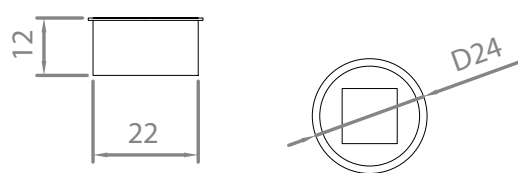


LUUBA FLAT

Optics

General lighting

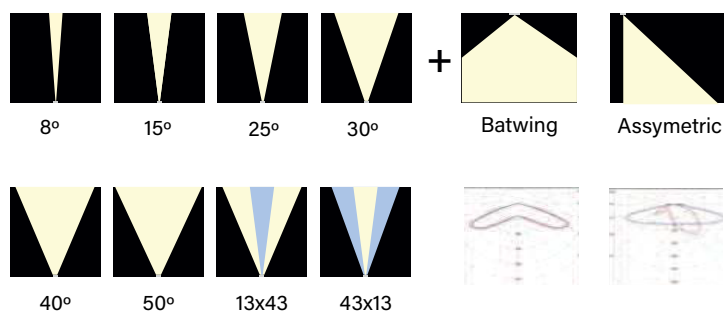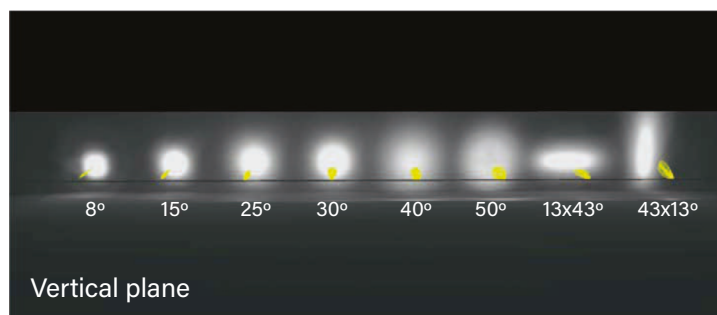

Path lighting

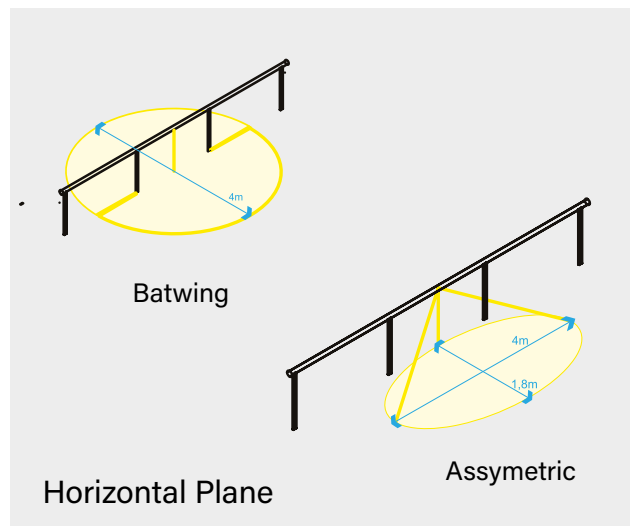


Electrical

LUUBA works at constant current.
It admits current from 100mA to 900mA.
If outside temperature can reach more than 50°C,
current must not exceed 700mA.

Feeding current	Operating voltage	Power	Luminous flux
100mA	2,58 V	0,26 W	37lm
200mA	2,62 V	0,52 W	74lm
300mA	2,65 V	0,80 W	118lm
400mA	2,70 V	0,95 W	148lm
500mA	2,75 V	1,38 W	214lm
600mA	2,77 V	1,67 W	240lm
700mA	2,80 V	1,96 W	274lm
800mA	2,84 V	2,28 W	310lm
900mA	2,87 V	2,60 W	350lm

*Data referred to 4000K



GLIDE

iotaLAMP



IP67



IK10



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h




LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



EFFECTS
EFFECTS SERIES

References

Code	Light Color	Type-Power	Lense	Voltage	Driver
☐ VL-GLIDE	White				
	☐ W24 2400K	☐ Type A - 3W	☐ 2x120°	☐ UNIV 100-264Vac (Only for type A and B)	☐ STD ON/OFF
	☐ W27 2700K	☐ Type B - 9W		☐ 010 0-10V	
	☐ W30 3000K	☐ Type C - 20W		☐ DALI	
	☐ W40 4000K			☐ 24 24Vdc	☐ CAS Casambi
	☐ W60 6000K				
	Single Color (SC)				
	☐ R Red	☐ Type A - 3W	☐ 2x120°	☐ UNIV 100-264Vac (Only for type A and B)	☐ STD ON/OFF
	☐ B Blue	☐ Type B - 9W		☐ 010 0-10V	
	☐ G Green	☐ Type C - 20W		☐ DALI	
	☐ A Amber			☐ 24 24Vdc	☐ CAS Casambi
	RGBW				
	☐ RGBW3 4 in 1 Chip RGB+W3000K	☐ Type A - 3W ☐ Type B - 9W ☐ Type C - 20W	☐ 2x120°	☐ 24 24Vdc	☐ DMX
☐ RGBW4 4 in 1 Chip RGB+W4000K					

Reference example

VL-GLIDE-W30-Type A-3W-2x120-DALI


Variations



TYPE A




TYPE B




TYPE C



Dimensions



TYPE A





TYPE B



TYPE C

GLIDE.XL

iotaLAMP

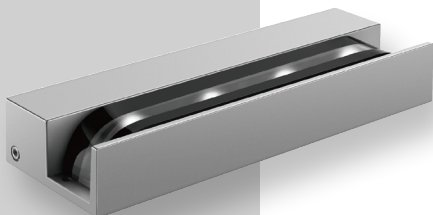


EFFECTS
EFFECTS SERIES

References


Code	Light Color	Power	Lense	Voltage	Driver
☐ IL-GLIDE.XL	White				
	☐ W24 2400K	☐ 36W	☐ 2x120°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ W27 2700K				
	☐ W30 3000K			☐ 24 24Vdc	
	☐ W40 4000K				
	☐ W60 6000K				
	Single Color (SC)				
	☐ R Red	☐ 36W	☐ 2x120°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ B Blue				
	☐ G Green			☐ 24 24Vdc	
	☐ A Amber				
	RGBW				
	☐ RGBW3	☐ 36W	☐ 2x120°	☐ 24 24Vdc	☐ DMX
	4 in 1 Chip				
	RGB+W3000K				
	☐ RGBW4				
	4 in 1 Chip				
	RGB+W4000K				

Reference example

IL-GLIDE.XL-W27-36W-2x120-STD

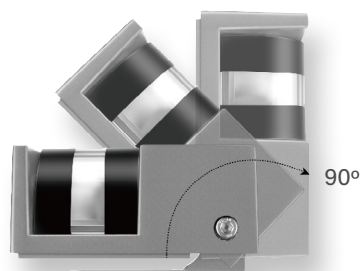


Dimensions

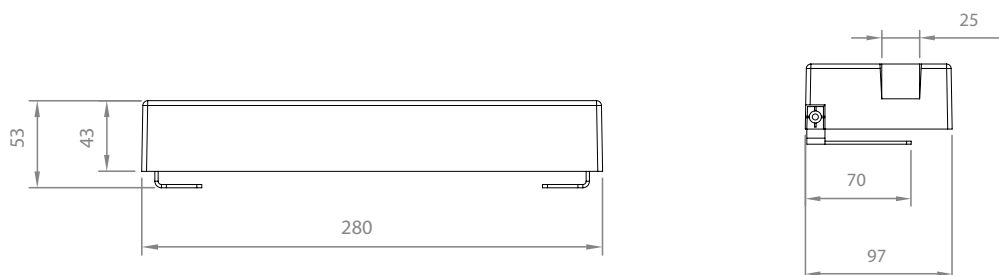

WAYS

iotaLAMP



IP67



IK10



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



EFFECTS
EFFECTS SERIES

References


Code	Light Color	Power	Lense	Voltage	Driver
☐ IL-WAYS	White				
	☐ W24 2400K	☐ 4W	☐ 2°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ W27 2700K	☐ 8W	☐ 20°		
	☐ W30 3000K		☐ 30°	☐ 24 24Vdc	
	☐ W40 4000K		☐ 60°		
	☐ W60 6000K				
	Single Color				
	☐ (SC)	☐ 4W	☐ 2°	☐ UNIV 100-264Vac	☐ STD ON/OFF
	☐ R Red	☐ 8W	☐ 20°		
	☐ B Blue		☐ 30°	☐ 24 24Vdc	
	☐ G Green		☐ 60°		
	☐ A Amber				

Reference example

IL-WAYS-W40-8W-2-STD





Dimensions

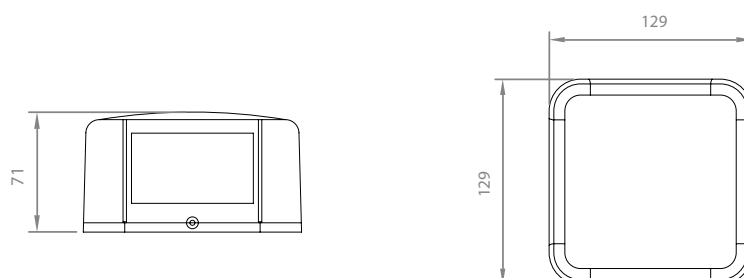

SHIFT.UD

iotaLAMP



EFFECTS
EFFECTS SERIES

References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ IL-SHIFT.UD	White				
	☐ W24 2400K	☐ Size A - 8W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac
	☐ W27 2700K	☐ Size B - 16W	☐ 20°	☐ 30°	☐ STD ON/OFF
	☐ W30 3000K	☐ Size C - 21W	☐ 45°	☐ 60°	☐ 010 0-10V
	☐ W40 4000K	☐ Size D - 36W	☐ ASYM		☐ DALI
	☐ W60 6000K				☐ CAS Casambi
	Single Color (SC)				
	☐ R Red	☐ Size A - 8W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac
	☐ B Blue	☐ Size B - 16W	☐ 20°	☐ 30°	☐ STD ON/OFF
	☐ G Green	☐ Size C - 21W	☐ 45°	☐ 60°	☐ 010 0-10V
	☐ A Amber	☐ Size D - 36W	☐ ASYM		☐ DALI
					☐ CAS Casambi

Reference example

IL-SHIFT.UD-W60-SizeA-8W-ASYM-UNIV-STD

Variations



SIZE A
D=100mm
L=170mm



SIZE B
D=100mm
L=250mm




SIZE C
D=155mm
L=250mm




SIZE D
D=155mm
L=350mm


Dimensions

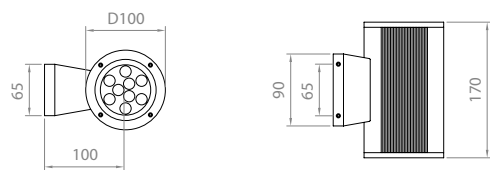


SIZE A

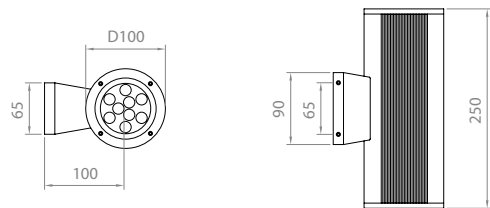

SIZE B

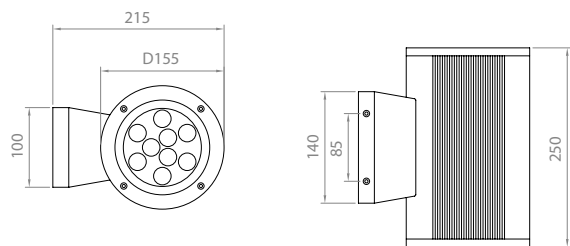



SIZE C

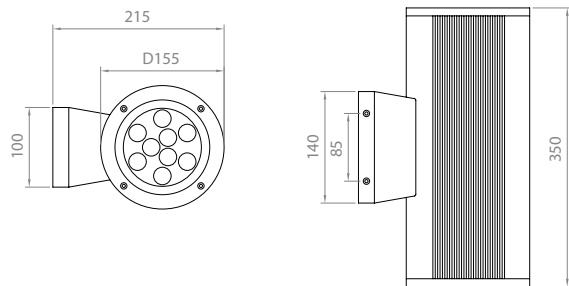

SIZE D

SHIFT.D

*iota*LAMP



EFFECTS
EFFECTS SERIES



References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ IL-SHIFT.D	White				
	☐ W24 2400K	☐ Size A -3,5W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac
	☐ W27 2700K	☐ Size A - 8W	☐ 20°	☐ 30°	☐ STD ON/OFF
	☐ W30 3000K	☐ Size B - 11W	☐ 45°	☐ 60°	☐ 010 0-10V
	☐ W40 4000K	☐ Size B - 16W	☐ ASYM		☐ DALI
	☐ W60 6000K				☐ CAS Casambi
	White - COB Led module (SC)				
	☐ W30 3000K	☐ Size A -10W	☐ 15°	☐ UNIV 100-264Vac	
	☐ W40 4000K	☐ Size B - 26W			
	Single Color (SC)				
	☐ R Red	☐ Size A -3,5W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac
	☐ B Blue	☐ Size A - 8W	☐ 20°	☐ 30°	☐ STD ON/OFF
	☐ G Green	☐ Size B - 11W	☐ 45°	☐ 60°	☐ 010 0-10V
	☐ A Amber	☐ Size B - 16W	☐ ASYM		☐ DALI
					☐ CAS Casambi



Reference example

IL-SHIFT.D-W40-SizeB-16W-ASYM-UNIV-STD

Dimensions



SIZE A



SIZE B

Variations






SIZE A
D=100mm



SIZE B
D=155mm

SHIFT.CL

iotaLAMP

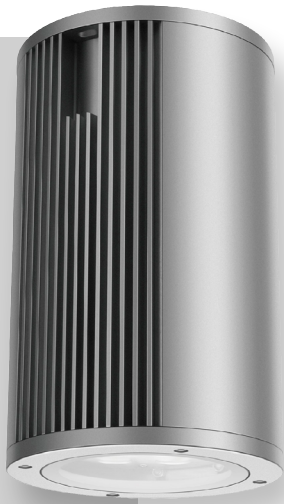

EFFECTS
EFFECTS SERIES



References

Code	Light Color	Size-Power	Lense	Voltage	Driver
☐ VL-SHIFT.CL	White				
	☐ W24 2400K	☐ Size A -3,5W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac
	☐ W27 2700K	☐ Size A - 8W	☐ 20°	☐ 30°	☐ STD ON/OFF
	☐ W30 3000K	☐ Size B - 11W	☐ 45°	☐ 60°	☐ 010 0-10V
	☐ W40 4000K	☐ Size B - 16W	☐ ASYM		☐ DALI
	☐ W60 6000K				☐ CAS Casambi
	White - COB Led module (SC)				
	☐ W30 3000K	☐ Size A -10W	☐ 15°	☐ UNIV 100-264Vac	
	☐ W40 4000K	☐ Size B - 26W			
	Single Color (SC)				
	☐ R Red	☐ Size A -3,5W	☐ 8°	☐ 12°	☐ UNIV 100-264Vac
	☐ B Blue	☐ Size A - 8W	☐ 20°	☐ 30°	☐ STD ON/OFF
	☐ G Green	☐ Size B - 11W	☐ 45°	☐ 60°	☐ 010 0-10V
	☐ A Amber	☐ Size B - 16W	☐ ASYM		☐ DALI
					☐ CAS Casambi



Reference example

IL-SHIFT.CL-W24-SizeA-3,5W-8-UNIV-STD

Dimensions



SIZE A



SIZE B

Variations



SIZE A
D=100mm



SIZE B
D=155mm

IOTALAMP

NEW DELHI | HONGKONG | VIETNAM

w w w . i o t a l a m p . c o m