




Description

Compact and modern design with separate bodies for leds and power supply to ensure the best heat dissipation and prolong the life of the fixture. High pressure die-casting aluminum with electrostatic coating to stand harsh outdoor environment. Many optic options and accessories to meet project requirements. Ideal for building facade and accent applications.

Compliance






Features

- LED Chip: 36 Pieces of Cree XP-G3
- Input Wattage: Up to 150W
- Lumen Output: 11,776 lm at 3000K 30°
- CCT: 2700K-5700K or Tunable White from 2200K to 5000K
- Optics: 2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70°, 5x20°
- Voltage: AC100-277V
- Operating Temperature: -25°C - 50°C
- IP Rating: IP66
- Finishes:  Grey
- Accessories: Visor, Glare Shield, cZoom Optical Film (5°, 30°, 10x60°)
- Control: On/Off (Dimming / DMX512 Optional)
- Life: 50,000 Hrs
- Warranty: Five Year



Dimensions

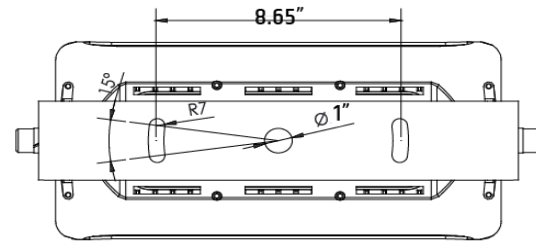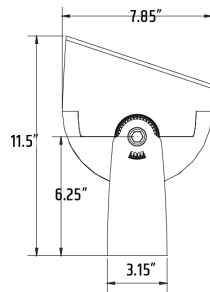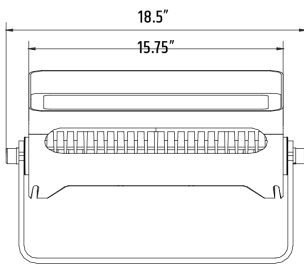

Ordering Information

| Item | COLOR TEMP. | VOLTAGE | OPTICS | FINISH | OTHERS |
|------------|-------------------|--------------|---|--------------------|--------------------|
| MEGALUX-36 | -27K -2700K | UNV 100-277V | O2.6 O1070 | GR Grey (Standard) | (Blank) |
| | -30K -3000K | | O3.5 O0520 | | VR Visor |
| | -40K -4000K | | O12 | CU Custom | GS Glare Shield |
| | -50K -5000K | | O20 | | DM Dimmable 0-10V |
| | -57K -5700K | | O30 | | DMX DMX512 Control |
| | -TW Tunable White | | O60 | | |
| | | | -U Bracket is standard. -Standard wire lead is 3 feet. | | |