


MEGALUX 600W

*iota***LAMP**

view






RAL

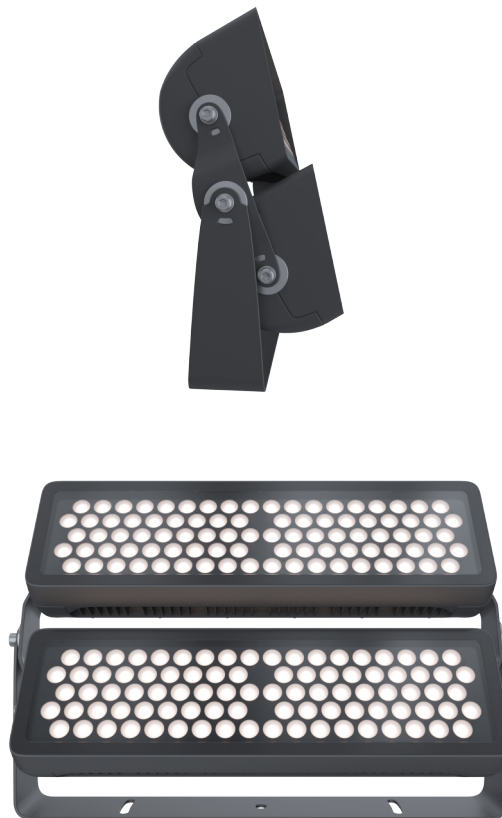

1 overall dimensions

size

1

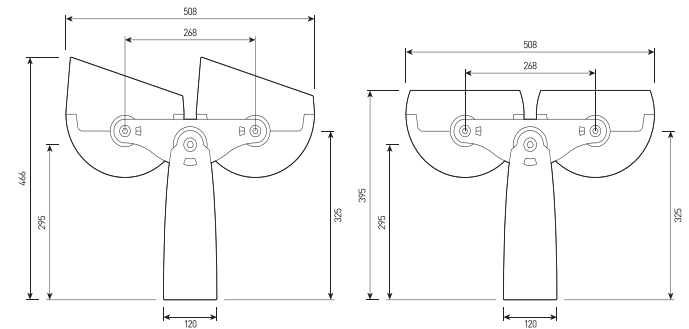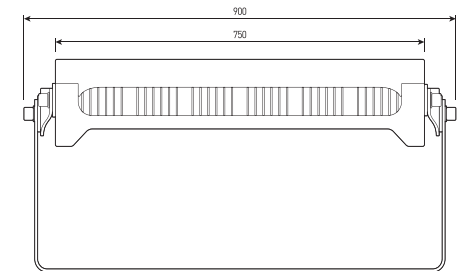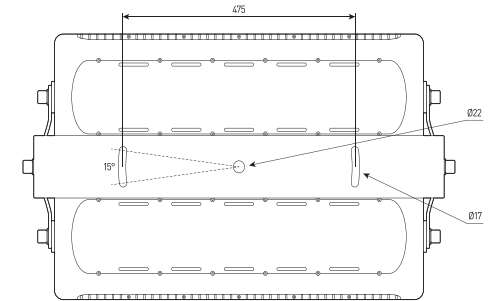



MEGALUX 600W

Powerful multifunctional floodlight for landscape and architectural lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone gaskets.
Fasteners:	Stainless steel
Beam angle:	1.5°, 2.6°, 6°, 8°, 12°, 20°, 25°, 30°, 45°, 60°, 10x45°, 10x70°, 5x20°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B, RGBW 4in1
Input voltage, V:	220V
Control system:	On/Off, DMX-512, RDM
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	37.0 kg

Article	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
MEGALUX 320W 220V SINGLE IP66	320W	750x508x395	220V	1.5°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	37.0
MEGALUX 320W 220V DMX-512 RGBW IP66	320W	750x508x395	220V	1.5°	RGBW	37.0
MEGALUX 420W 220V SINGLE IP66	420W	750x508x395	220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10°x70°, 5°x20°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	37.0
MEGALUX 420W 220V DMX-512 RGBW IP66	420W	750x508x395	220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10°x70°, 5°x20°	RGBW	37.0
MEGALUX 600W 220V SINGLE IP66	600W	750x508x395	220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10°x70°, 5°x20°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	37.0
MEGALUX 720W 220V DMX-512 RGBW 4in1 IP66	720W	750x508x395	220V	8°, 25°, 10x45°	RGBW	37.0