



### Description

Compact and modern design with separate bodies for LEDs and power supply to ensure the best heat dissipation and prolong the life of the fixture. Die-cast aluminum body with electrostatic coating to withstand harsh outdoor environments. Multiple optical options. RGBW 4-in-1 chips and cPure device for more vibrant colors. Ideal for building facade and accent applications requiring high lumen output.

### Compliance


Conforms to ETL/FCC/CE standards

### Features

|                        |   |
|------------------------|---|
| LED Chip:              | 96 Pieces of Cree Chips   |
| Input Wattage:         | 800W  |
| Color:                 | RGBW, White Color Tuning from 2200K to 6500K  |
| Optics:                | 8°, 25°, 10x45°   |
| Voltage:               | AC100-305V  |
| Operating Temperature: | -25°C - 50°C  |
| IP Rating:             | IP66  |
| Finishes:              | <br>Grey |
| Accessories:           | Glare Shield, Honeycomb Louvre  |
| Control:               | DMX512 with cPure 6 Channels  |
| Life:                  | 80,000 Hrs  |
| Warranty:              | Five Years  |




## Dimensions

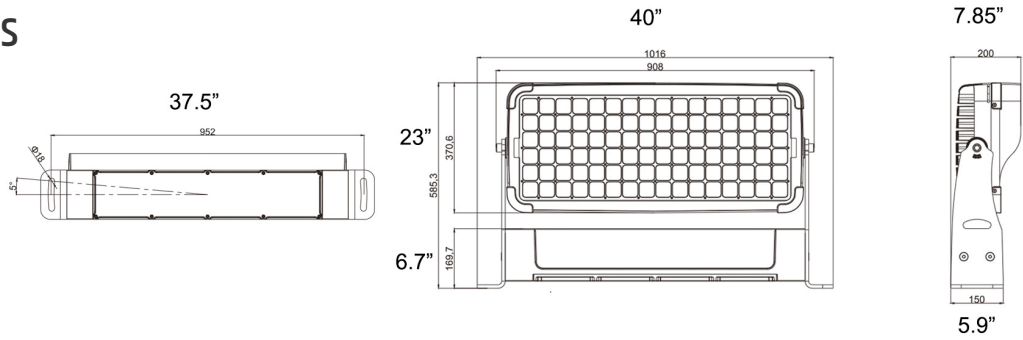


## Accessories



Glare Shield



Honeycomb Louvre

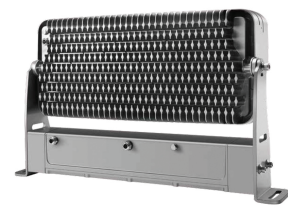

## Ordering Information

| Item       | COLOR TEMP.  | VOLTAGE             | OPTICS                                  | FINISH   | OTHERS  |
|------------|--|---------------------|---|--|---|
| MEGALUX-96 | - <b>RGBW</b> -2700K<br>-3000K<br>-4000K<br>-5000K | <b>UNV</b> 100-305V | <b>O8</b><br><b>O25</b><br><b>O1045</b> | <b>GR</b> Grey (Standard)<br><b>CU</b> Custom<br><br><b>-Standard wire lead is 3 feet.</b> | <b>(Blank)</b><br><b>GS</b> Glare Shield<br><b>HL</b> Honeycomb Louvre<br><br><b>DMX/RDM</b> DMX512 Control with cPure Color Correction |