

# iotaLAMP

## Megalux ARCHITECTURAL MONO 56W




### Description

Compact and modern design with separate bodies for leds and power supply to ensure the best heat dissipation and prolong the life of the fixture. High pressure die-casting aluminum with electrostatic coating to stand harsh outdoor environment. Many optic options and accessories to meet project requirements. Ideal for building facade and accent applications.

### Compliance




### Features

LED Chip:	12 Pieces of Cree XP-G3
Input Wattage:	Up to 56W
Lumen Output:	5396 lm at 3000K 30°
CCT:	2700K-5700K or Tunable White from 2200K to 5000K
Optics:	3.5°, 12°, 20°, 30°, 60°, 10x70°, 5x20°
Voltage:	AC100-277V
Operating Temperature:	-25°C - 50°C
IP Rating:	IP66
Finishes:	 Grey
Accessories:	Visor, Glare Shield, cZoom Optical Film (5°, 30°, 10x60°)
Control:	On/Off (Dimming / DMX512 Optional)
Life:	50,000 Hrs
Warranty:	Five Year



## Dimensions

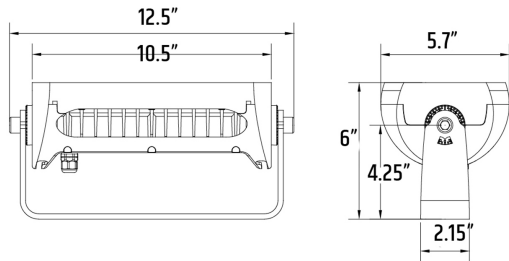

## Accessories



Standard



Visor



Glare Shield

## Ordering Information

Item	COLOR TEMP.	VOLTAGE	OPTICS	FINISH	OTHERS
MEGALUX-12	-27K -2700K -30K -3000K -40K -4000K -50K -5000K -57K -5700K -TW Tunable White	UNV 100-277V	O3.5 O1070 O12 O0520 O20 O30 O60	GR Grey (Standard) CU Custom -U Bracket is standard. -Standard wire lead is 3 feet.	(Blank) VR Visor GS Glare Shield DM Dimmable 0-10V DMX DMX512 Control