



**FOX.50**



**FOX.35**



**FOX.25**



**FOX.16**



**FOX.9**



**FOX.6**



**FOX.4**



CIRCULAR PROJECTORS  
**FOX SERIES**



# FOX.50

iotaLAMP

www.iotalamp.com



CIRCULAR PROJECTORS  
**FOX SERIES**

## References

| Code   | Type               | Finish           | Light Color      | Power                    | Lense              |                    | Voltage                | Driver                 |                   |
|--------|--------------------|------------------|------------------|--------------------------|--------------------|--------------------|------------------------|------------------------|-------------------|
| VL-F50 | A Base<br>B Base 2 | LG Light grey    | <b>White</b>     |                          |                    |                    |                        |                        |                   |
|        |                    | DK Dark grey     | <b>W24</b> 2400K | <b>190W</b>              | <b>1,5°</b> (190W) | <b>2°</b>          | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF      |                   |
|        | WH White           | <b>W27</b> 2700K | <b>300W</b>      | <b>4,5°</b>              | <b>8°</b>          | <b>010</b> 0-10V   |                        |                        |                   |
|        | BK Black           | <b>W30</b> 3000K | <b>360W</b>      | <b>12°</b>               | <b>20°</b>         | <b>DALI</b>        |                        |                        |                   |
|        | RAL Any RAL color  | <b>W40</b> 4000K |                  | <b>30°</b>               | <b>40°</b>         | <b>CAS</b> Casambi |                        |                        |                   |
|        |                    | <b>W60</b> 6000K |                  | <b>60°</b>               | <b>5x20°</b>       |                    |                        |                        |                   |
|        |                    |                  |                  | <b>10x70°</b>            |                    |                    |                        |                        |                   |
|        |                    |                  |                  | <b>Single Color (SC)</b> |                    |                    |                        |                        |                   |
|        |                    |                  |                  | <b>R</b> Red             | <b>360W</b>        | <b>4,5°</b>        | <b>8°</b>              | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF |
|        |                    |                  |                  | <b>B</b> Blue            |                    | <b>12°</b>         | <b>20°</b>             | <b>010</b> 0-10V       |                   |
|        |                    |                  |                  | <b>G</b> Green           |                    | <b>30°</b>         | <b>40°</b>             | <b>DALI</b>            |                   |
|        |                    |                  |                  | <b>A</b> Amber           |                    | <b>60°</b>         | <b>5x20°</b>           | <b>CAS</b> Casambi     |                   |
|        |                    |                  |                  | <b>10x70°</b>            |                    |                    |                        |                        |                   |
|        |                    |                  |                  | <b>RGBW</b>              |                    |                    |                        |                        |                   |
|        |                    |                  |                  | <b>RGBW3</b>             | <b>300W</b>        | <b>8°</b>          | <b>15°</b>             | <b>UNIV</b> 100-264Vac | <b>DALI</b>       |
|        |                    |                  | 4 in 1 Chip      | <b>360W</b>              | <b>20°</b>         | <b>30°</b>         |                        | <b>DMX</b>             |                   |
|        |                    |                  | RGB+W3000K       |                          | <b>60°</b>         | <b>15x60°</b>      |                        | <b>CAS</b> Casambi     |                   |
|        |                    |                  | <b>RGBW4</b>     |                          |                    |                    |                        |                        |                   |
|        |                    |                  | 4 in 1 Chip      |                          |                    |                    |                        |                        |                   |
|        |                    |                  | RGB+W4000K       |                          |                    |                    |                        |                        |                   |
|        |                    |                  | <b>RGBW7</b>     |                          |                    |                    |                        |                        |                   |
|        |                    |                  | 7 in 1 Chip      |                          |                    |                    |                        |                        |                   |
|        |                    |                  | RGBWCLA          |                          |                    |                    |                        |                        |                   |

Reference example

VL-F50-B-BK-RGB7-36W-8°-UNIV-DMX

## Variations



**A**  
Base




**B**  
Base 2


## Dimensions

*iota***LAMP**

www.iotalamp.com

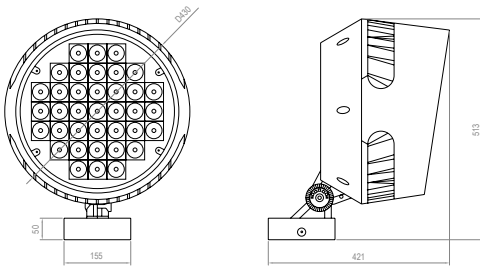

**TYPE A**

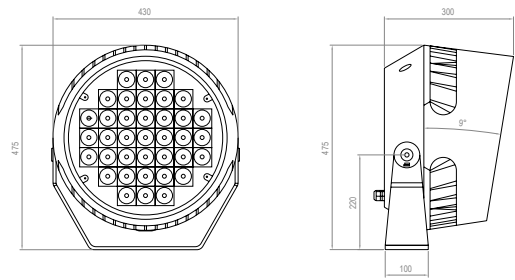


**TYPE B**

## Accessories

| Code | Accessories |
|------|-------------|
|------|-------------|

**VL-F50**      **HC** Honeycomb Grid  
**MSH** Mesh

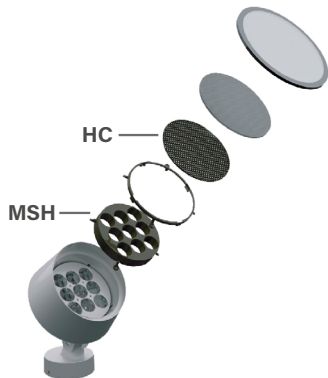

| Code | Accessories |
|------|-------------|
|------|-------------|

**VL-F50**      **\*CBLX** Special length cable\*      \* Instead of X, put length of cable needed  
 Example: VL-F50-CBL-10m

# FOX.35

iotaLAMP

www.iotalamp.com



|                                      |                                  |                       |         |
|--------------------------------------|----------------------------------|-----------------------|---------|
| IP66                                 | IK09                             | CREE XP-G             | RECYCLE |
| FAILURE RATE<br>< 0,1% after 25,000h | LIFE TIME<br>Tested over 50,000h | MIN -20°C<br>MAX 55°C | CLASE I |
| SP US                                |                                  |                       |         |

CIRCULAR PROJECTORS  
**FOX SERIES**


## References

| Code   | Type               | Finish           | Light Color      | Power                    | Lense              |                    | Voltage                | Driver                 |                    |
|--------|--------------------|------------------|------------------|--------------------------|--------------------|--------------------|------------------------|------------------------|--------------------|
| VL-F35 | A Base<br>B Base 2 | LG Light grey    | <b>White</b>     |                          |                    |                    |                        |                        |                    |
|        |                    | DK Dark grey     | <b>W24</b> 2400K | <b>120W</b>              | <b>1,5°</b> (120W) | <b>2°</b>          | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF      |                    |
|        | WH White           | <b>W27</b> 2700K | <b>200W</b>      | <b>4,5°</b>              | <b>8°</b>          | <b>010</b> 0-10V   |                        |                        |                    |
|        | BK Black           | <b>W30</b> 3000K | <b>240W</b>      | <b>12°</b>               | <b>20°</b>         | <b>DALI</b>        |                        |                        |                    |
|        | RAL Any RAL color  | <b>W40</b> 4000K |                  | <b>30°</b>               | <b>40°</b>         | <b>CAS</b> Casambi |                        |                        |                    |
|        |                    | <b>W60</b> 6000K |                  | <b>60°</b>               | <b>5x20°</b>       |                    |                        |                        |                    |
|        |                    |                  |                  | <b>10x70°</b>            |                    |                    |                        |                        |                    |
|        |                    |                  |                  | <b>Single Color (SC)</b> |                    |                    |                        |                        |                    |
|        |                    |                  | <b>R</b> Red     |                          | <b>240W</b>        | <b>4,5°</b>        | <b>8°</b>              | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF  |
|        |                    |                  | <b>B</b> Blue    |                          |                    | <b>12°</b>         | <b>20°</b>             |                        | <b>010</b> 0-10V   |
|        |                    |                  | <b>G</b> Green   |                          |                    | <b>30°</b>         | <b>40°</b>             |                        | <b>DALI</b>        |
|        |                    |                  | <b>A</b> Amber   |                          |                    | <b>60°</b>         | <b>5x20°</b>           |                        | <b>CAS</b> Casambi |
|        |                    |                  |                  |                          |                    | <b>10x70°</b>      |                        |                        |                    |
|        |                    |                  |                  | <b>RGBW</b>              |                    |                    |                        |                        |                    |
|        |                    |                  | <b>RGBW3</b>     |                          | <b>200W</b>        | <b>8°</b>          | <b>15°</b>             | <b>UNIV</b> 100-264Vac | <b>DALI</b>        |
|        |                    | 4 in 1 Chip      |                  | <b>240W</b>              | <b>20°</b>         | <b>30°</b>         |                        | <b>DMX</b>             |                    |
|        |                    | RGB+W3000K       |                  |                          | <b>60°</b>         | <b>15x60°</b>      |                        | <b>CAS</b> Casambi     |                    |
|        |                    | <b>RGBW4</b>     |                  |                          |                    |                    |                        |                        |                    |
|        |                    | 4 in 1 Chip      |                  |                          |                    |                    |                        |                        |                    |
|        |                    | RGB+W4000K       |                  |                          |                    |                    |                        |                        |                    |
|        |                    | <b>RGBW7</b>     |                  |                          |                    |                    |                        |                        |                    |
|        |                    | 7 in 1 Chip      |                  |                          |                    |                    |                        |                        |                    |
|        |                    | RGBWCLA          |                  |                          |                    |                    |                        |                        |                    |

Reference example

VL-F35-B-BK-B-200W-10x70°-UNIV-010

## Variations




**A**  
Base




**B**  
Base 2

## Dimensions

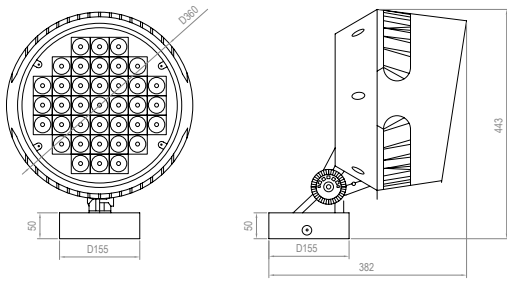

**TYPE A**

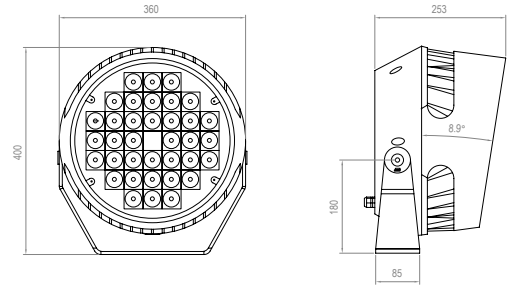


**TYPE B**

## Accessories

| Code | Accessories |
|------|-------------|
|------|-------------|

**VL-F35** HC Honeycomb Grid  
MSH Mesh

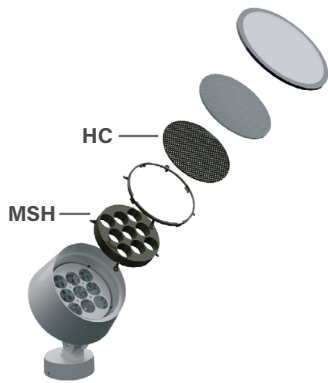


| Code | Accessories |
|------|-------------|
|------|-------------|

**VL-F35** \*CBLX Special length cable\* \* Instead of X, put length of cable needed  
Example: VL-F35-CBL-10m

# FOX.25

iotaLAMP

www.iotalamp.com



CIRCULAR PROJECTORS  
**FOX SERIES**

## References

| Code   | Type              | Finish                   | Light Color  | Power  | Lense      |        | Voltage         | Driver      |
|--------|-------------------|--------------------------|--------------|--------|------------|--------|-----------------|-------------|
| VL-F25 | A Base            | LG Light grey            | <b>White</b> |        |            |        |                 |             |
|        | B Base 2          | DK Dark grey             | W24 2400K    | 70W    | 1,5° (70W) | 2,5°   | UNIV 100-264Vac | STD ON/OFF  |
|        | C Pole Arm        | WH White                 | W27 2700K    | 85W    | 6°         | 12°    |                 | 010 0-10V   |
|        |                   | BK Black                 | W30 3000K    | 120W   | 20°        | 30°    |                 | DALI        |
|        | RAL Any RAL color | W40 4000K                |              | 40°    | 60°        |        | CAS Casambi     |             |
|        |                   | W60 6000K                |              | 5x20°  | 10x70°     |        |                 |             |
|        |                   | <b>Single Color (SC)</b> |              |        |            |        |                 |             |
|        |                   | R Red                    |              | 85W    | 2,5°       | 6°     | UNIV 100-264Vac | STD ON/OFF  |
|        |                   | B Blue                   |              | 120W   | 12°        | 20°    |                 | 010 0-10V   |
|        |                   | G Green                  |              |        | 30°        | 40°    |                 | DALI        |
|        |                   | A Amber                  |              |        | 60°        | 5x20°  |                 | CAS Casambi |
|        |                   |                          |              |        |            | 10x70° |                 |             |
|        | <b>RGBW</b>       |                          |              |        |            |        |                 |             |
|        |                   | RGBW3                    |              | 150W   | 15°        | 20°    | UNIV 100-264Vac | DALI        |
|        |                   | 4 in 1 Chip              |              |        | 30°        | 60°    | 36 36Vdc        | DMX         |
|        | RGB+W3000K        |                          |              | 15x60° |            |        | CAS Casambi     |             |
|        | RGBW4             |                          |              |        |            |        |                 |             |
|        | 4 in 1 Chip       |                          |              |        |            |        |                 |             |
|        | RGB+W4000K        |                          |              |        |            |        |                 |             |
|        | RGBW7             |                          |              |        |            |        |                 |             |
|        | 7 in 1 Chip       |                          |              |        |            |        |                 |             |
|        | RGBWCLA           |                          |              |        |            |        |                 |             |

Reference example

VL-F25-C-DK-W60-120W-60°-UNIV-STD

## Variations



**A**  
Base





**B**  
Base 2





**C**  
Pole Arm  
D=45mm


## Dimensions



**TYPE A**

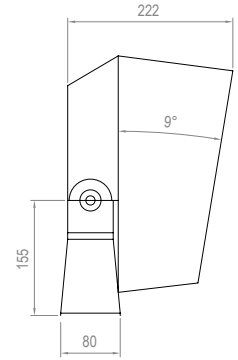


**TYPE B**

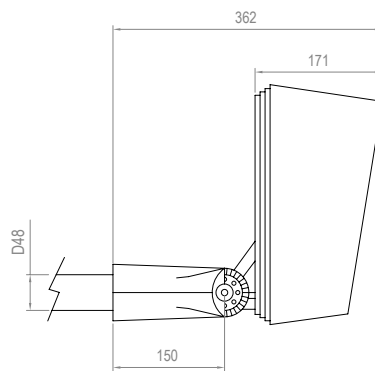

**TYPE C**

## Accessories

| Code   | Accessories                   |
|--------|-------------------------------|
| VL-F25 | HC Honeycomb Grid<br>MSH Mesh |


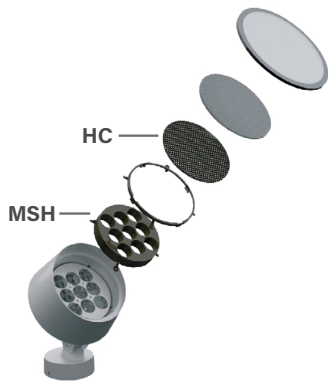


| Code   | Accessories  |
|--------|--|
| VL-F25 | *1BR Braket for 1 projector<br>*2BR Braket for 2 projector<br>*CBLX Special length cable |


\* Must be used with Type C  
\* Must be used with Type C  
\* Instead of X, put length of cable needed  
Example: VL-F25-CBL-10m





**1BR**



**2BR**



# FOX.16



CIRCULAR PROJECTORS  
**FOX SERIES**

## References

| Code          | Type                    | Finish                   | Light Color      | Power                    | Lense             |               | Voltage                | Driver                 |                    |
|---------------|-------------------------|--------------------------|------------------|--------------------------|-------------------|---------------|------------------------|------------------------|--------------------|
| <b>VL-F16</b> | <b>A</b> Base           | <b>LG</b> Light grey     | <b>White</b>     |                          |                   |               |                        |                        |                    |
|               | <b>B</b> Base 2         | <b>DK</b> Dark grey      | <b>W24</b> 2400K | <b>40W</b>               | <b>1,5°</b> (40W) | <b>2,5°</b>   | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF      |                    |
|               | <b>C</b> Pole Arm       | <b>WH</b> White          | <b>W27</b> 2700K | <b>60W</b>               | <b>6°</b>         | <b>12°</b>    |                        | <b>010</b> 0-10V       |                    |
|               | <b>D</b> Pole mounted   | <b>BK</b> Black          | <b>W30</b> 3000K | <b>75W</b>               | <b>20°</b>        | <b>30°</b>    | <b>24</b> 24Vdc        | <b>DALI</b>            |                    |
|               | <b>E</b> Stripe mounted | <b>RAL</b> Any RAL color | <b>W40</b> 4000K |                          | <b>40°</b>        | <b>60°</b>    |                        | <b>CAS</b> Casambi     |                    |
|               |                         |                          |                  | <b>W60</b> 6000K         |                   | <b>5x20°</b>  | <b>10x70°</b>          |                        |                    |
|               |                         |                          |                  | <b>Single Color (SC)</b> |                   |               |                        |                        |                    |
|               |                         |                          |                  | <b>R</b> Red             | <b>60W</b>        | <b>2,5°</b>   | <b>6°</b>              | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF  |
|               |                         |                          |                  | <b>B</b> Blue            | <b>75W</b>        | <b>12°</b>    | <b>20°</b>             |                        | <b>010</b> 0-10V   |
|               |                         |                          |                  | <b>G</b> Green           |                   | <b>30°</b>    | <b>40°</b>             | <b>24</b> 24Vdc        | <b>DALI</b>        |
|               |                         |                          |                  | <b>A</b> Amber           |                   | <b>60°</b>    | <b>5x20°</b>           |                        | <b>CAS</b> Casambi |
|               |                         |                          |                  | <b>RGBW</b>              |                   |               |                        |                        |                    |
|               |                         |                          |                  | <b>RGBW3</b>             | <b>100W</b>       | <b>15°</b>    | <b>20°</b>             | <b>UNIV</b> 100-264Vac | <b>DALI</b>        |
|               |                         |                          |                  | 4 in 1 Chip              |                   | <b>30°</b>    | <b>60°</b>             |                        | <b>DMX</b>         |
|               |                         |                          |                  | RGB+W3000K               |                   | <b>15x60°</b> |                        | <b>36</b> 36Vdc        | <b>CAS</b> Casambi |
|               |                         |                          | <b>RGBW4</b>     |                          |                   |               |                        |                        |                    |
|               |                         |                          | 4 in 1 Chip      |                          |                   |               |                        |                        |                    |
|               |                         |                          | RGB+W4000K       |                          |                   |               |                        |                        |                    |
|               |                         |                          | <b>RGBW7</b>     |                          |                   |               |                        |                        |                    |
|               |                         |                          | 7 in 1 Chip      |                          |                   |               |                        |                        |                    |
|               |                         |                          | RGBWCLA          |                          |                   |               |                        |                        |                    |

Reference example

VL-F16-C-DK-W60-75W-20°-UNIV-STD

## Variations



**A**  
Base



**B**  
Base 2



**C**  
Pole Arm  
D=45mm




**D**  
Pole mounted  
D67-325mm




**E**  
Stripe mounted




## Dimensions

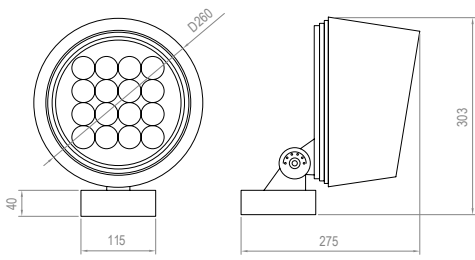


**TYPE A**

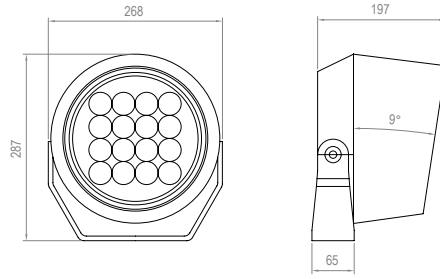


**TYPE B**



**TYPE C**



**TYPE D**

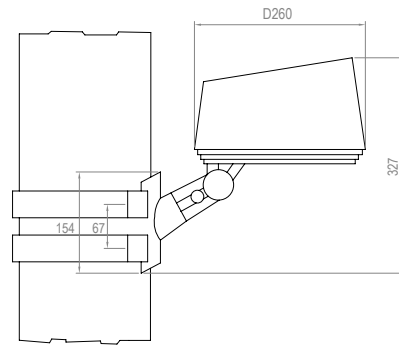

**TYPE E**



## Accessories

| Code   | Accessories                              |
|--------|--|
| VL-F16 | <p>HC Honeycomb Grid</p> <p>MSH Mesh</p> |


| Code   | Accessories  |
|--------|--|
| VL-F16 | <p>*1BR Bracket for 1 projector</p> <p>*2BR Bracket for 2 projector</p> <p>*CBLX Special length cable</p> <p><i>* Must be used with Type C</i></p> <p><i>* Must be used with Type C</i></p> <p><i>* Instead of X, put length of cable needed</i></p> <p><i>Example: VL-F16-CBL-10m</i></p> |



**1BR**



**2BR**



## FOX.9



IP66



IK09



CREE XP-G



RECYCLE

FAILURE RATE  
< 0,1% after 25,000hLIFE TIME  
Tested over 50,000hMIN -20°C  
MAX 55°C

CLASE I

CIRCULAR PROJECTORS  
FOX SERIES

## References

| Code  | Type                     | Finish            | Light Color      | Power      | Lense             |             | Voltage                | Driver                 |                    |
|-------|--------------------------|-------------------|------------------|------------|-------------------|-------------|------------------------|------------------------|--------------------|
| VL-F9 | A Base                   | LG Light grey     | <b>White</b>     |            |                   |             |                        |                        |                    |
|       | B Base 2                 | DK Dark grey      | <b>W24</b> 2400K | <b>30W</b> | <b>1,5°</b> (30W) | <b>2,5°</b> | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF      |                    |
|       | C Pole Arm               | WH White          | <b>W27</b> 2700K | <b>35W</b> | <b>6°</b>         | <b>12°</b>  |                        | <b>24</b> 24Vdc        | <b>010</b> 0-10V   |
|       | D Pole mounted           | BK Black          | <b>W30</b> 3000K | <b>45W</b> | <b>20°</b>        | <b>30°</b>  | <b>5x20°</b>           |                        | <b>DALI</b>        |
|       | E Stripe mounted         | RAL Any RAL color | <b>W40</b> 4000K |            | <b>40°</b>        | <b>60°</b>  |                        | <b>10x70°</b>          | <b>CAS</b> Casambi |
|       | F Nut                    |                   | <b>W60</b> 6000K |            |                   |             |                        |                        |                    |
|       | <b>Single Color (SC)</b> |                   |                  |            |                   |             |                        |                        |                    |
|       |                          | <b>R</b> Red      |                  |            | <b>35W</b>        | <b>2,5°</b> | <b>6°</b>              | <b>UNIV</b> 100-264Vac | <b>STD</b> ON/OFF  |
|       |                          | <b>B</b> Blue     |                  |            | <b>45W</b>        | <b>12°</b>  | <b>20°</b>             |                        | <b>24</b> 24Vdc    |
|       |                          | <b>G</b> Green    |                  |            |                   | <b>30°</b>  | <b>40°</b>             | <b>5x20°</b>           |                    |
|       |                          | <b>A</b> Amber    |                  |            |                   | <b>60°</b>  | <b>10x70°</b>          |                        | <b>10x70°</b>      |
|       | <b>RGBW</b>              |                   |                  |            |                   |             |                        |                        |                    |
|       | <b>RGBW3</b>             |                   |                  | <b>60W</b> | <b>15°</b>        | <b>20°</b>  | <b>UNIV</b> 100-264Vac | <b>DALI</b>            |                    |
|       | 4 in 1 Chip              |                   |                  |            | <b>30°</b>        | <b>60°</b>  |                        | <b>36</b> 36Vdc        | <b>DMX</b>         |
|       | RGB+W3000K               |                   |                  |            | <b>15x60°</b>     |             | <b>CAS</b> Casambi     |                        | <b>CAS</b> Casambi |
|       | <b>RGBW4</b>             |                   |                  |            |                   |             |                        |                        |                    |
|       | 4 in 1 Chip              |                   |                  |            |                   |             |                        |                        |                    |
|       | RGB+W4000K               |                   |                  |            |                   |             |                        |                        |                    |
|       | <b>RGBW7</b>             |                   |                  |            |                   |             |                        |                        |                    |
|       | 7 in 1 Chip              |                   |                  |            |                   |             |                        |                        |                    |
|       | RGBWCLA                  |                   |                  |            |                   |             |                        |                        |                    |


Reference example

VL-F9-A-DK-W30-45W-2,5°-UNIV-DALI


## Variations

A  
BaseB  
Base 2C  
Pole Arm  
D=45mmD  
Pole mounted  
D67-325mmE  
Stripe mountedF  
Nut (M10x1,5mm)


## Dimensions

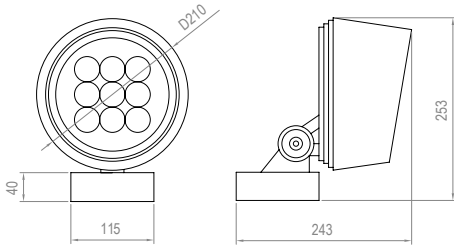


**TYPE A**

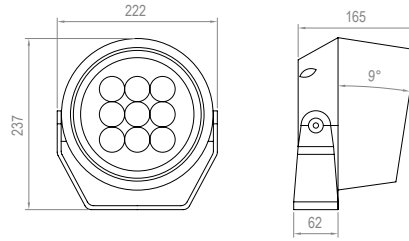


**TYPE B**




**TYPE C**



**TYPE D**

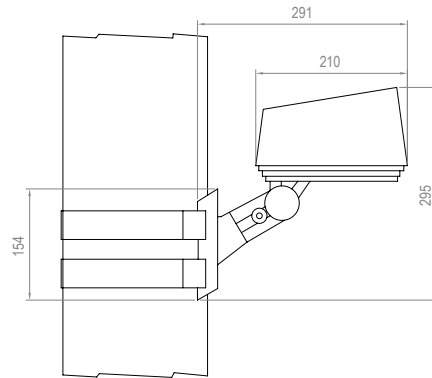

**TYPE E**




**TYPE F**

## Accessories

| Code | Accessories |
|------|-------------|
|------|-------------|

**VL-F9** HC Honeycomb Grid  
MSH Mesh

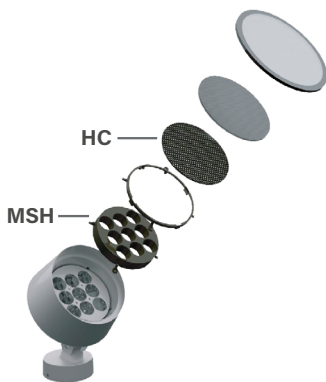


| Code | Accessories |
|------|-------------|
|------|-------------|



**VL-F9** \*SPK SPIKE  
\*1BR Bracket for 1 projector  
\*2BR Bracket for 2 projector  
\*BX Elevated Box  
\*CBLX Special length cable  
*\* Must be used with Type F*  
*\* Must be used with Type C*  
*\* Must be used with Type F*  
*\* Instead of X, put length of cable needed*  
*Example: VL-F9-CBL-10m*




**SPK**



**BX**

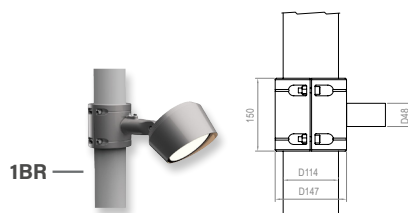

**1BR**

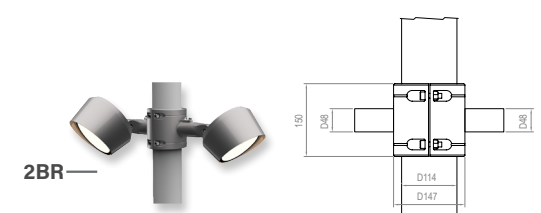


**2BR**

# FOX.6

iotaLAMP

www.iotalamp.com



CIRCULAR PROJECTORS  
**FOX SERIES**

## References

| Code        | Type                     | Finish            | Light Color  | Power | Lense      |        | Voltage         | Driver      |  |
|-------------|--------------------------|-------------------|--------------|-------|------------|--------|-----------------|-------------|--|
| VL-F6       | A Base                   | LG Light grey     | <b>White</b> |       |            |        |                 |             |  |
|             | B Base 2                 | DK Dark grey      | W24 2400K    | 22W   | 1,5° (30W) | 2,5°   | UNIV 100-264Vac | STD ON/OFF  |  |
|             | C Pole Arm               | WH White          | W27 2700K    | 30W   | 6°         | 12°    |                 | 010 0-10V   |  |
|             | D Pole mounted           | BK Black          | W30 3000K    |       | 20°        | 30°    | 24 24Vdc        | DALI        |  |
|             | E Stripe mounted         | RAL Any RAL color | W40 4000K    |       | 40°        | 60°    |                 | CAS Casambi |  |
|             | F Nut                    |                   | W60 6000K    |       | 5x20°      | 10x70° |                 |             |  |
|             | <b>Single Color (SC)</b> |                   |              |       |            |        |                 |             |  |
|             | R Red                    |                   |              | 22W   | 2,5°       | 6°     | UNIV 100-264Vac | STD ON/OFF  |  |
|             | B Blue                   |                   |              | 30W   | 12°        | 20°    |                 | 010 0-10V   |  |
|             | G Green                  |                   |              |       | 30°        | 40°    | 24 24Vdc        | DALI        |  |
|             | A Amber                  |                   |              |       | 60°        | 5x20°  |                 | CAS Casambi |  |
|             | <b>RGBW</b>              |                   |              |       |            |        |                 |             |  |
|             | RGBW3                    |                   |              | 30W   | 8°         | 15°    | UNIV 100-264Vac | DALI        |  |
|             | 4 in 1 Chip              |                   |              | 36W   | 20°        | 30°    |                 | DMX         |  |
|             | RGB+W3000K               |                   |              |       | 60°        | 15x60° | 24 24Vdc        | CAS Casambi |  |
| RGBW4       |                          |                   |              |       |            |        |                 |             |  |
| 4 in 1 Chip |                          |                   |              |       |            |        |                 |             |  |
| RGB+W4000K  |                          |                   |              |       |            |        |                 |             |  |

Reference example

VL-F6-A-DK-RGBW3-36W-15°-24-DMX

## Variations



**A**  
Base



**B**  
Base 2



**C**  
Pole Arm  
D=45mm



**D**  
Pole mounted  
D67-325mm



**E**  
Stripe mounted




**F**  
Nut (M10x1,5mm)


## Dimensions

iotaLAMP


www.iotalamp.com

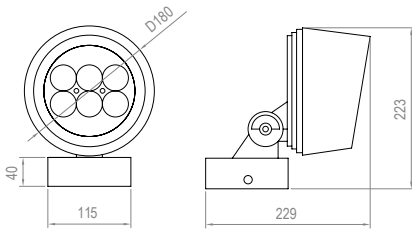


**TYPE A**

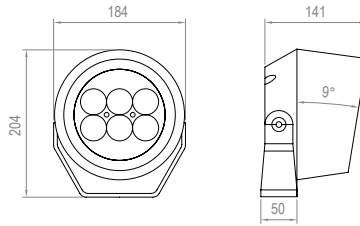


**TYPE B**




**TYPE C**



**TYPE D**

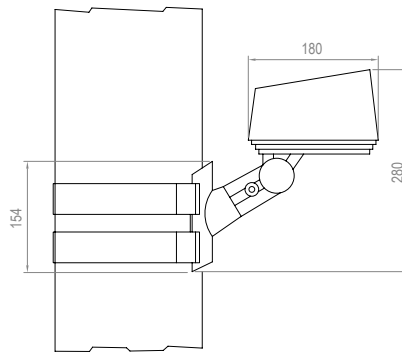


**TYPE E**



**TYPE F**

## Accessories

| Code  | Accessories                   |
|-------|-------------------------------|
| VL-F6 | HC Honeycomb Grid<br>MSH Mesh |


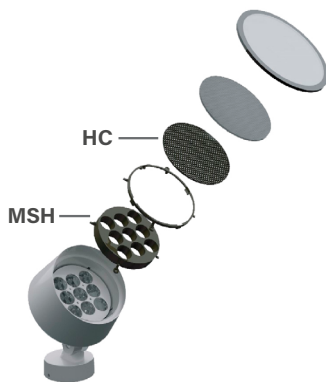


| Code  | Accessories  |
|-------|--|
| VL-F6 | *SPK SPIKE<br>*1BR Bracket for 1 projector<br>*2BR Bracket for 2 projector<br>*BX Elevated Box<br>*CBLX Special length cable |



\* Must be used with Type F  
\* Must be used with Type C  
\* Must be used with Type F  
\* Instead of X, put length of cable needed  
Example: VL-F6-CBL-10m




**SPK**



**BX**

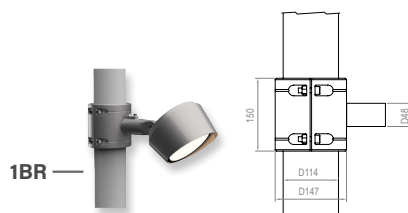

**1BR**

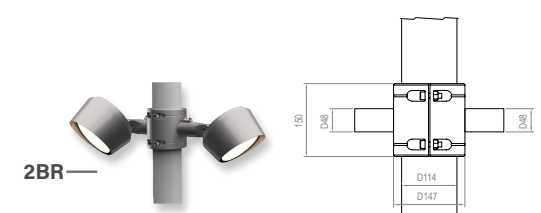


**2BR**

# FOX.4

iotaLAMP

www.iotalamp.com



CIRCULAR PROJECTORS  
**FOX SERIES**

## References

| Code        | Type                     | Finish            | Light Color  | Power  | Lense      |        | Voltage         | Driver      |  |
|-------------|--------------------------|-------------------|--------------|--------|------------|--------|-----------------|-------------|--|
| VL-F4       | A Base                   | LG Light grey     | <b>White</b> |        |            |        |                 |             |  |
|             | B Base 2                 | DK Dark grey      | W24 2400K    | 10W    | 1,5° (10W) | 2,5°   | UNIV 100-264Vac | STD ON/OFF  |  |
|             | C Pole Arm               | WH White          | W27 2700K    | 15W    | 6°         | 12°    |                 | 010 0-10V   |  |
|             | D Pole mounted           | BK Black          | W30 3000K    | 20W    | 20°        | 30°    | 24 24Vdc        | DALI        |  |
|             | E Stripe mounted         | RAL Any RAL color | W40 4000K    |        | 40°        | 60°    |                 | CAS Casambi |  |
|             | F Nut                    |                   | W60 6000K    |        | 5x20°      | 10x70° |                 |             |  |
|             | <b>Single Color (SC)</b> |                   |              |        |            |        |                 |             |  |
|             | R Red                    |                   |              | 15W    | 2,5°       | 6°     | UNIV 100-264Vac | STD ON/OFF  |  |
|             | B Blue                   |                   |              | 20W    | 12°        | 20°    |                 | 010 0-10V   |  |
|             | G Green                  |                   |              |        | 30°        | 40°    | 24 24Vdc        | DALI        |  |
|             | A Amber                  |                   |              |        | 60°        | 5x20°  |                 | CAS Casambi |  |
|             | <b>RGBW</b>              |                   |              |        |            |        |                 |             |  |
|             | RGBW3                    |                   |              | 20W    | 15°        | 20°    | 24 24Vdc        | DALI        |  |
| 4 in 1 Chip |                          |                   | 30°          |        | 60°        | DMX    |                 |             |  |
| RGB+W3000K  |                          |                   |              | 15x60° |            |        | CAS Casambi     |             |  |
| RGBW4       |                          |                   |              |        |            |        |                 |             |  |
| 4 in 1 Chip |                          |                   |              |        |            |        |                 |             |  |
| RGB+W4000K  |                          |                   |              |        |            |        |                 |             |  |

Reference example

VL-F4-A-WH-W24-10W-1,5°-UNIV-STD

## Variations



**A**  
Base



**B**  
Base 2



**C**  
Pole Arm  
D=45mm



**D**  
Pole mounted  
D67-325mm




**E**  
Stripe mounted




**F**  
Nut (M10x1,5mm)


## Dimensions

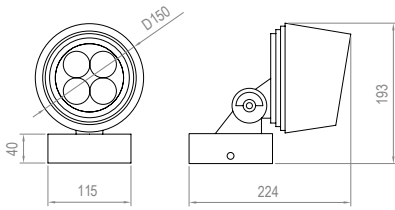


**TYPE A**




**TYPE B**




**TYPE C**



**TYPE D**

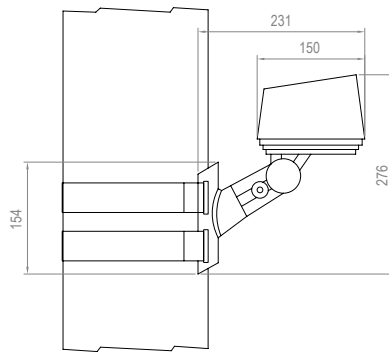


**TYPE E**



**TYPE F**

## Accessories

| Code  | Accessories                   |
|-------|-------------------------------|
| VL-F4 | HC Honeycomb Grid<br>MSH Mesh |

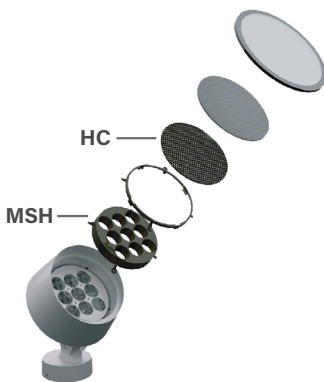


| Code  | Accessories  |
|-------|--|
| VL-F4 | *SPK SPIKE<br>*1BR Bracket for 1 projector<br>*2BR Bracket for 2 projector<br>*BX Elevated Box<br>*CBLX Special length cable |



\* Must be used with Type F  
\* Must be used with Type C  
\* Must be used with Type F  
\* Instead of X, put length of cable needed  
Example: VL-F4-CBL-10m




**SPK**



**BX**



**1BR**



**2BR**

